



Heavy Vehicle Specialist Certificate

Heavy Vehicle Specialist Inspector and Inspecting Organisation

Heavy Vehicle Specialist Inspector's Name (PRINT IN CAPS)

ID

CHRIS GARRIE

CJC

Vehicle Registration*

VIN / Chassis Number

7A9E20014C1023113

Component being certified:

Chassis Modification

Load Anchorage

Log Bolsters

Certification Category

Towing Connection

✓ Brakes

SRT

HUEK

Description of Work

CARRY OUT COMPLIANCE OF VEHICLE TO THE NZ HEAVY VEHICLE BRAKE RULE.

Code/Standard Certified to

HUBNZ 32015/2 SCHED 5.

Component Load Rating(s)

N/A.

General Drawing Number(s)

N/A

Supporting Documents

BRAKE DESIGN CERTIFICATE - JH121113
PREV EXEMPTION REF - HU1312/371

*Special Conditions

WARNING LAMP MUST ILLUMINATE WHEN IGNITION IS SWITCHED ON + THEN EXTINGUISH IMMEDIATELY OR WHEN VEHICLE EXCEEDS 7KPH.

Certification Expiry Date (if applicable)

N/A

or Hubodometer Reading (whichever comes first)

Declaration

I the undersigned, declare that I am the Heavy Vehicle Specialist Inspector identified above and I hold a current valid appointment. I certify that the above mentioned vehicle component's design, manufacture and installation, and this certification complies in all respects with the Land Transport Rule Vehicle Standards Compliance 2002 and my Deed of Appointment. To the best of my knowledge the information contained in this Certificate is true and correct.

Designer's ID (if certified by a manufacturer)

Inspector's / Delegate's Signature

*Delegate's Name (PRINT IN CAPS)

Date

Number

28.11.2012

421381

COF Vehicle Inspector ID:

COF Vehicle Inspector Signature:

Date

All fields excluding those marked with * must be completed before this certificate can be accepted.

WABCO START-UP PROTOCOL

System	Trailer EBS-E	WABCO part number	480 102 080 0
Production date	2011-07-19	Serial number	897000090600E
Serial number (modulator)	000000000000		
Fingerprint Customer EOL / Customer Development / Flash Program	W503643 / 2012-11-28 ; 00000000 / 0000-00-00 ; W503643 / 2012-11-28		

WABCO TRAILER EBS-E

GGVS/ADR TUEH TB 2007 - 019.00
TDB 0855

HERSTELLER MANUFACTURER CONSTRUCTEUR	DOMETT			GIO	Pin1	Pin3	Pin4
TYP TYPE TYPE	5AX F/T			1	---	---	---
FAHRZEUG IDENTNR. CHASSIS NUMBER NUMERO DE CHASSIS	7A9E20014C1023113			2	---	---	---
BREMSBERECHNUNGS-NR. BRAKE CALCULATION NO. CALCUL DE FREINAGE NO.	TP50718			3	ALS2	ALS2	---
POLRADZAHNEZAHL c-d e-f POLE WHEEL TEETH c-d e-f DENTS ROUE DENTÉE c-d e-f	80	80	ABS-System ABS-System Systeme ABS	4	---	---	---
			4S/3M	5	DIAG	DIAG	DIAG
RSS RSS RSS	Einfachbereifung Single Tyre Monte simple		Lenkachse Steering axle Essieu virant	6	---	---	---
	Zwillingsbereifung Twin Tyre Monte jumelée	X	Kippkritisches Fahrzeug Critical Trailer Vehicule critique	7	---	---	---
Subsystems	---		I/O				

ACHSE AXLE ESSIEU	pm (bar)		6.5		pm (bar)		0.7		2.0		---		6.5		TYP TYPE	(mm)	(mm)	(bar)	
	↓ (kg)	○	↓ (kg)	○	↓ (kg)	○	↓ (kg)	○	↓ (kg)	○	↓ (kg)	○	1.0	Pz					
1	1650	0.7	2.0	7250	4.7	0.4	1.4	---	5.9	-	24	67	127	490	3681				
2	1650	0.7	2.0	7250	4.7	0.4	1.4	---	5.9	-	24	57	127	490	3681				
3	1350	0.5	1.7	6000	3.8	0.4	1.4	---	4.5	-	24 / 30	64	127	514	2861				
4	1350	0.5	1.7	6000	3.8	0.4	1.4	---	4.5	-	24 / 30	64	127	514	2861				
5	1350	0.5	1.7	6000	3.8	0.4	1.4	---	4.5	-	24 / 30	64	127	514	2861				

Diagnostic memory	OK	Warning lamp control	OK
Parameter setting	carried out	Stop light power supply	Not tested
EBS pressure test	Not tested	Lifting axle test	Not tested
Redundancy test	OK	ECAS distance sensor calibration	Not tested
ABS sensor assignment	OK	Distance sensor Axle load calibr	Not tested
RTR check	Not tested	Leak test	Not tested
Immobilizer test	Not tested	Signal outputs TEBS	Not tested
Signal inputs	Not tested		

Diagnostic memory ELEX	Not tested	Signal outputs ELEX	Not tested
TailGUARDlight	Not tested	TailGUARD	Not tested

Manufacturer	DOMETT	Vehicle ident. no	7A9E20014C1023113
Vehicle type	5AX F/T	Odometer reading	0.0 km
next Service	0 km	Trip reading	0.0 km
Tested by	Chris Clarke	Signature	
Date	2012-11-28 11:25:02 a.m.		



NZ TRANSPORT AGENCY
WAKA KOTAHI

NATIONAL OFFICE

50 Victoria Street
Private Bag 6995
Wellington 6141
New Zealand
T 64 4 894 5400
F 64 4 894 6100

Exemption: HVB12/371

www.nzta.govt.nz

**EXEMPTION FROM SPECIFIED REQUIREMENTS OF LAND TRANSPORT RULE:
Heavy-vehicle Brakes 2006, Rule 32015**

Pursuant to Section 166(1) of the Land Transport Act 1998, and pursuant to the powers delegated to me, I Jackie Hartley, Administrator (Assessments) hereby exempt the motor vehicle specified in Schedule 1 hereto from the section of Land Transport Rule: Heavy-vehicle Brakes 2006 (the Rule) listed in Schedule 2, subject to the conditions specified in Schedule 3.

SCHEDULE 1:

Make/Model: **Domett Truck & Trailer Ltd, 5 axle full-trailer**
VIN/CHASSIS: **7A9E20014C1023113**

SCHEDULE 2: - Exempted Requirement

Section 2.3(9); The parking brake of a vehicle, whether or not it is being operated as a combination vehicle, must be able to be applied by the driver from the normal driving position using one control only.

SCHEDULE 3: - Conditions of this exemption:

- 1) The vehicle must be fitted with a Wabco park-release emergency valve (PREV), Part Number: 971 002 900 0.
- 2) The vehicle must be fitted with the Wabco PREV name plate, Part Number 971 002 103 4, adjacent to the PREV.
- 3) The vehicle must still be fitted with a parking brake that complies with all parking brake requirements in the Rule other than the requirement in Clause 2.3(9) of the Rule.
- 4) The installation of the PREV must be approved in writing by Gough Transpecs or an NZ Transport Agency appointed HVEK certifier acting on behalf of, and under instruction from, Gough Transpecs; Gough Transpecs must keep a written record of all approvals.
- 5) An HVEK certifier in 4) must be fully trained in end of line procedures for Wabco electronically controlled braking systems
- 6) Gough Transpecs must provide full operator training in the use of the PREV and furnish the operator with full written operating instructions for the PREV.
- 7) The vehicle must not be modified in any way while operating under this exemption.
- 8) This original exemption must be kept by Gough Transpecs.
- 9) A copy of this exemption (printed on a silver WABCO Sticker) must be affixed to the exempted vehicle as close to the WABCO PREV as possible.
- 10) The sticker in 9) must be legible and include all printed areas of this original exemption letter.
- 11) This exemption can be revoked at any time in writing by the NZ Transport Agency.

Signed at Wellington this 20th day of November 2012.

Jackie Hartley
Administrator (Assessments)

trailer (full, semi-, centre-axle) with air brake system acc. to UN/ECE-R.13.11

distribution: DOMETT
7A9E20014C1023113
SODC: JH121113

please note!

This brake calculation is made under consideration of
-the legal precriptions mentioned above in the version valid at the time of making the program (V6.12.08.27).
-the functional characteristics of our products as well as the data of the brake out of the test approvals of the axle manufacturers, and
-the other vehicle data included in the brake calculation.
Please check whether these data correspond to the actual vehicle data.
Our conditions of delivery apply (particularly section 9.0).
In any case we commend to do a braking harmonisation!
WABCOBrake V6.12.08.27 db 30.08.2012

vehicle manufacturer: DOMETT
trailer model : 5AX F/T
trailer type : 5-axle-full-trailer
remarks : air / hydraulic / VA suspension
WABCO TRAILER - EBS E
TRISTOP 3+4+5: 24/30
265/70 R 19,5

axle 1 + 2 + 3 + 4 + 5 : Assali Stefen, B (350x200), TDB 0855 ECE,

		unladen	laden
total mass	P in kg	7350	32500
axle 1	P1 in kg	1650	7250
axle 2	P2 in kg	1650	7250
axle 3	P3 in kg	1350	6000
axle 4	P4 in kg	1350	6000
axle 5	P5 in kg	1350	6000
wheel base	E in mm	7250 - 7250	
centre of gravity height	h in mm	1075	2047

	axle 1	axle 2	axle 3	axle 4	axle 5
no. of combined axles	1	1	1	1	1
no. of brake chambers per axle line KDZ	2	2	2	2	2
The power output corresponds to	FE 747	FE 747BC	0051.0BC	0051.0BC	0051.0
brake chamber manufacturer	WABCO	WABCO	WABCO	WABCO	WABCO
chamber size	24	24	24/30	24/30	24/30
lever length lBh in mm	127	127	127	127	127
brake factor [-]	9.10	9.10	9.10	9.10	9.10
dyn. rolling radius rdyn min in mm	421	421	421	421	421
dyn. rolling radius rdyn max in mm	421	421	421	421	421
threshold torque Co Nm	25.0	25.0	25.0	25.0	25.0

calculation:

chamber pressure(rdyn min)pH at z=22,5%bar	2.2	2.2	1.9	1.9	1.9
chamber pressure(rdyn max)pH at z=22,5%bar	2.2	2.2	1.9	1.9	1.9
chamber press.(servo)pcha at pm6,5bar bar	5.9	5.9	4.5	4.5	4.5
piston force ThA at pm6,5bar N	8128	8128	6355	6355	6355
brake force(rdyn min)T lad. at pm6,5bar N	44258	44258	34398	34398	34398
brake force(rdyn max)T lad. at pm6,5bar N	44258	44258	34398	34398	34398
brake force within 1 % rolling friction proportion %	19.6	19.6	20.3	20.3	20.3

braking rate z laden 0.601 for rdyn min
z = sum (TR)/PRmax 0.601 for rdyn max

Trailer may only be operated in combination with trucks/tractors with ISO 7638 supply (5 or 7 polar).

brake diagram :

maximum pressure: 8.5 bar

axle 1:

valve 1: 971 002 ... 0 WABCO
 EBS emergency valve

valve 2: 480 207 0... 0 WABCO or 480 207 2... 0
 EBS relay valve

brake cylinder: WABCO 423 106 9... 0

axle 2:

valve 1: 971 002 ... 0 WABCO
 EBS emergency valve

valve 2: 480 207 0... 0 WABCO or 480 207 2... 0
 EBS relay valve

brake cylinder: WABCO 423 106 9... 0

axle 3:

valve 1: 971 002 ... 0 WABCO
 EBS emergency valve

valve 2: 480 102 ... 0 WABCO
 EBS trailer modulator

brake cylinder: WABCO 925 376 005 0 / 925 376 2... 0

axle 4:

valve 1: 971 002 ... 0 WABCO
 EBS emergency valve

valve 2: 480 102 ... 0 WABCO
 EBS trailer modulator

brake cylinder: WABCO 925 376 005 0 / 925 376 2.. 0

axle 5:


valve 1: 971 002 ... 0 WABCO
 EBS emergency valve

valve 2: 480 102 ... 0 WABCO
 EBS trailer modulator


brake cylinder: WABCO 925 376 005 0 / 925 376 2.. 0

test type III (zIII = 0.30)	for rdyn min :	axle1	axle2	axle3	axle4	axle5	
at pm 3.5 bar =>	pcha in bar :	2.9	2.9	2.5	2.5	2.5	2.5
test type III (zIII = 0.06)	for rdyn min :	axle1	axle2	axle3	axle4	axle5	
at pm 1.2 bar =>	pcha in bar :	0.7	0.7	0.8	0.8	0.8	0.8


brake chamber pressure laden

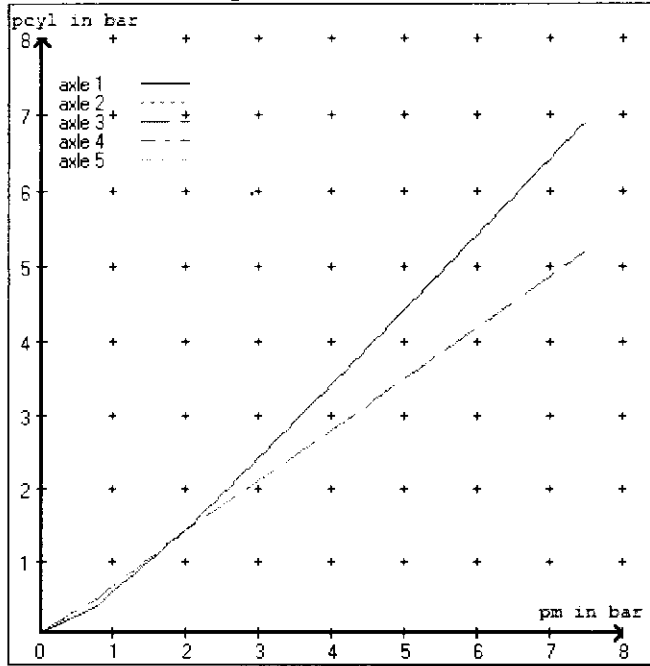


brake chamber pressure unladen

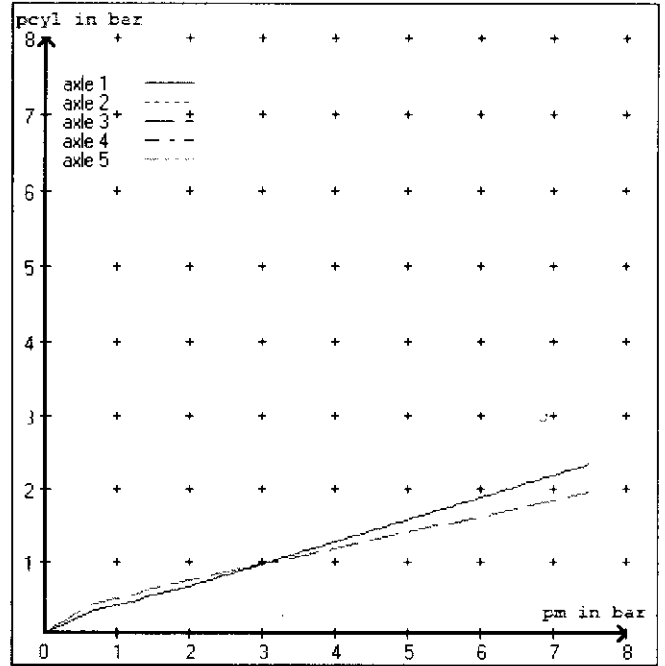


compatibility band laden

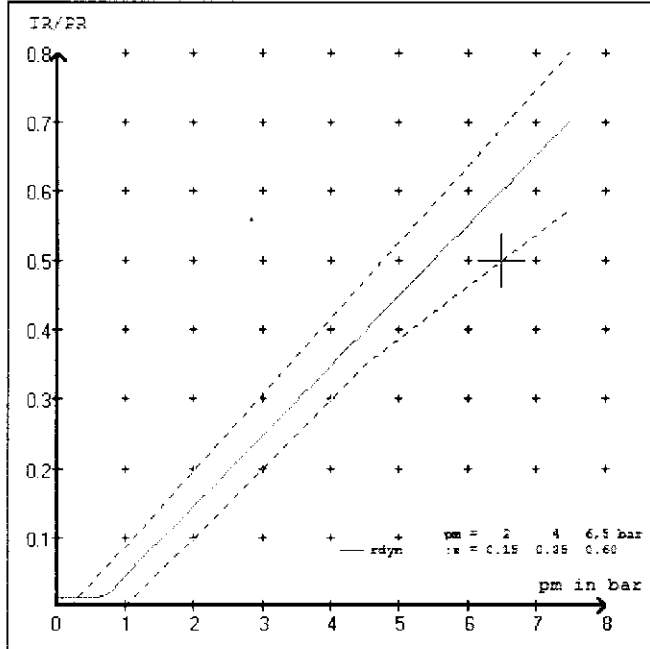


compatibility band unladen

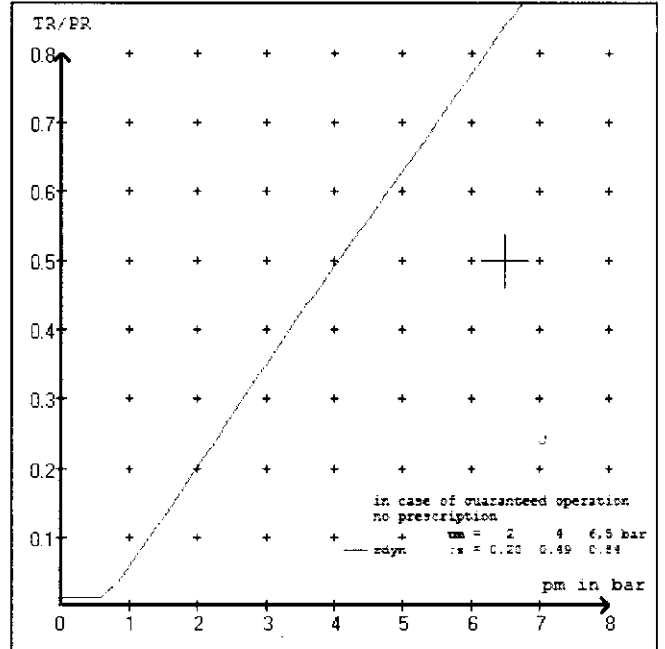

curves of friction laden

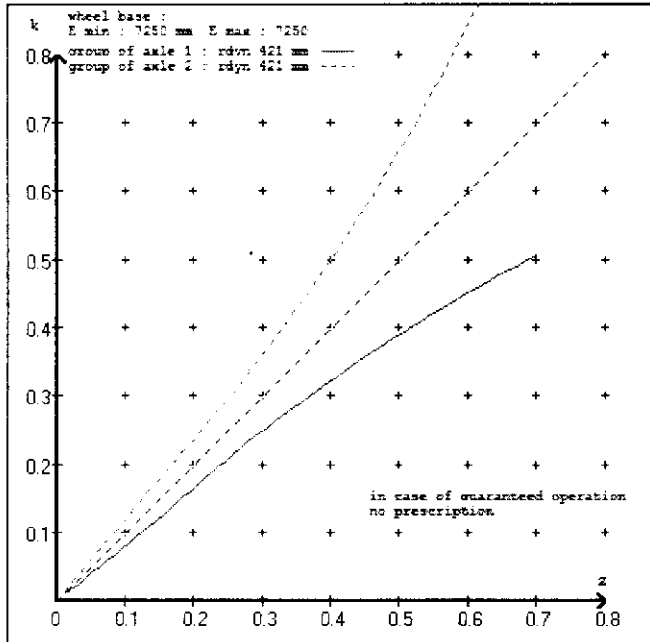

curves of friction unladen

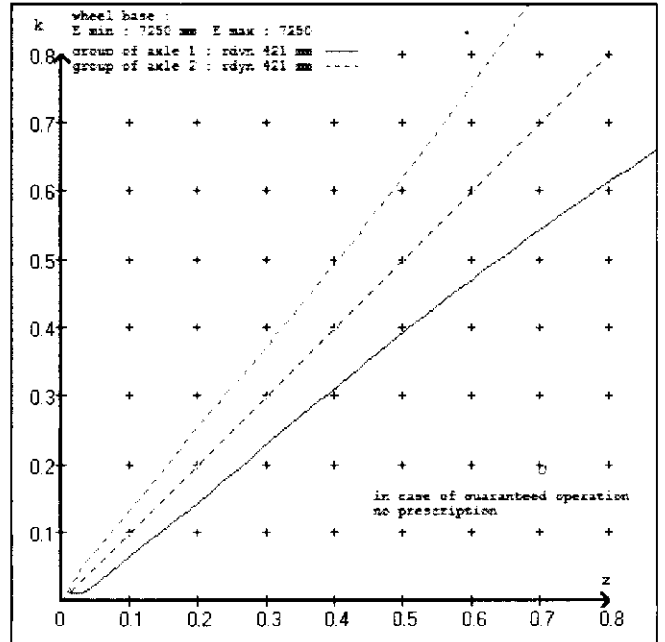

vehicle manufacturer: DOMETT
 trailer model : SAX F/T
 trailer type : 5-axle-full-trailer

brake chamber and lever length :

axle 1 : 2 x type/diameter 24 (WABCO) lever length 127 mm
 axle 2 : 2 x type/diameter 24 (WABCO) lever length 127 mm
 axle 3 : 2 x type/diameter 24/30 (WABCO) lever length 127 mm
 axle 4 : 2 x type/diameter 24/30 (WABCO) lever length 127 mm
 axle 5 : 2 x type/diameter 24/30 (WABCO) lever length 127 mm

brake diagram :

valve :

971 002 ... 0 WABCO EBS emergency valve
 480 207 0.. 0 WABCO EBS relay valve or 480 207 2.. 0
 480 102 ... 0 WABCO EBS trailer modulator

EBS input data

=====

vehicle manufacturer: DOMETT
 trailer model : SAX F/T
 trailer type : 5-axle-full-trailer
 brake calculation no. : TP 50718A

tire circumference main axle : 2650 for rdyn max
 tire circumference auxiliary axle : 2650 for rdyn max

assignment pm / deceleration z: pm 0.7 bar z = 0.010
 (laden condition) 2.0 bar z = 0.140
 6.5 bar z = 0.600

control pressure pm			6,5	control pressure pm			0.7	2.0	6.5
axle	axle load unladen	bellow pr. unladen	brake pr. unladen	axle load laden	bellow pr. laden	brake pr. laden			
1	1650	to be	2.0	7250	to be	0.3	1.4	5.9	
2	1650	entered by	2.0	7250	entered by	0.3	1.4	5.9	
3	1350	the vehicle manufact.	1.7	6000	the vehicle manufact.	0.4	1.4	4.5	
4	1350		1.7	6000		0.4	1.4	4.5	
5	1350		1.7	6000		0.4	1.4	4.5	

The unladen values indicated in the above table are values for the basic parameter set. Higher unladen axle loads and liftaxles are automatically recognized and do not require separate adjustment. The above unladen axle loads must not be fallen below.

=====

axle 1	axle 2	axle 3	axle 4	axle 5
axle load pcyl	axle load pcyl	axle load pcyl	axle load pcyl	axle load pcyl
1650 2.0	1650 2.0	1350 1.7	1350 1.7	1350 1.7
2150 2.3	2150 2.3	1850 2.0	1850 2.0	1850 2.0
2650 2.7	2650 2.7	2350 2.3	2350 2.3	2350 2.3
3150 3.0	3150 3.0	2850 2.6	2850 2.6	2850 2.6
3650 3.4	3650 3.4	3350 2.9	3350 2.9	3350 2.9
4150 3.7	4150 3.7	3850 3.2	3850 3.2	3850 3.2
4650 4.1	4650 4.1	4350 3.5	4350 3.5	4350 3.5
5150 4.4	5150 4.4	4850 3.8	4850 3.8	4850 3.8
7250 5.9	7250 5.9	6000 4.5	6000 4.5	6000 4.5

data sheet to ECE vehicle type-approval certificate concerning braking equipment: according to ECE R13 annex 11

axle 1 : reference axle: Assali StefTM / LM / LCe brake lining: ROR 685 AF
 test report : TDB 0855 ECE date : 20110721
 axle 2 : reference axle: Assali StefTM / LM / LCe brake lining: ROR 685 AF
 test report : TDB 0855 ECE date : 20110721
 axle 3 : reference axle: Assali StefTM / LM / LCe brake lining: ROR 685 AF
 test report : TDB 0855 ECE date : 20110721
 axle 4 : reference axle: Assali StefTM / LM / LCe brake lining: ROR 685 AF
 test report : TDB 0855 ECE date : 20110721
 axle 5 : reference axle: Assali StefTM / LM / LCe brake lining: ROR 685 AF
 test report : TDB 0855 ECE date : 20110721

calc. verif. of residual (hot) braking force type III
 (item 4.2.1 of appendix 2 to annex 11)

axle 1	(rdyn 421 mm)	T = 20.4 % Fe
axle 2	(rdyn 421 mm)	T = 20.4 % Fe
axle 3	(rdyn 421 mm)	T = 17.4 % Fe
axle 4	(rdyn 421 mm)	T = 17.4 % Fe
axle 5	(rdyn 421 mm)	T = 17.4 % Fe

calculated actuator stroke in mm
 (item 4.3.1.1 of appendix 2 to annex 11)

axle 1	(sp = 73 mm)	s = 54 mm
axle 2	(sp = 73 mm)	s = 54 mm
axle 3	(sp = 63 mm)	s = 54 mm
axle 4	(sp = 63 mm)	s = 54 mm
axle 5	(sp = 63 mm)	s = 54 mm

average thrust output in N at pm = 6,5 bar (however max. pcha = 7,0 bar)

axle1	ThA = 8128 N
axle2	ThA = 8128 N
axle3	ThA = 6355 N
axle4	ThA = 6355 N
axle5	ThA = 6355 N

calc. residual (hot) braking force in N
 (item 4.3.1.4 of appendix 2 to annex 11)

axle 1	(rdyn 421 mm)	T = 36635 N
axle 2	(rdyn 421 mm)	T = 36635 N
axle 3	(rdyn 421 mm)	T = 28481 N
axle 4	(rdyn 421 mm)	T = 28481 N
axle 5	(rdyn 421 mm)	T = 28481 N

basic test	type III
of subject	(calculated)
trailer (E)	residual
	(hot)braking

braking rate of the vehicle
 (item 4.3.2 to appendix 2 to annex 11)

0.60 0.50

required braking rate
 (items 1.5.3 and 1.7.2 to annex 11)

>= 0,4 and
 >= 0,6*E (0.36)

axle 1	(rdyn 421 mm)	T = 36635 N
axle 2	(rdyn 421 mm)	T = 36635 N
axle 3	(rdyn 421 mm)	T = 28481 N
axle 4	(rdyn 421 mm)	T = 28481 N
axle 5	(rdyn 421 mm)	T = 28481 N

basic test	type III
of subject	(calculated)
trailer (E)	residual
	(hot)braking

braking rate of the vehicle
 (item 4.3.2 to appendix 2 to annex 11)

0.60 0.50

required braking rate
 (items 1.5.3 and 1.7.2 to annex 11)

>= 0,4 and
 >= 0,6*E (0.36)


reference values

reference values for z = 50% for max rdyn: 421 mm

	pz [bar]	T [N]	T [N]
axle 1	1.0	4904	
	5.9	36820	
axle 2	1.0	4904	
	5.9	36820	
axle 3	1.0		5149
	4.5		28618
axle 4	1.0		5149
	4.5		28618
axle 5	1.0		5149
	4.5		28618

VIN - no.:

	Axle(s) / Achse(n)				
brake cylinder type (service / parking) Bremszylinder Typ (Betrieb / Fest)	24/	24/	24/30	24/30	24/30
Maximum stroke smax = ...mm maximaler Hub smax = ...mm	67	67	64	64	64
Lever length = ...mm Hebellänge = ...mm	127	127	127	127	127

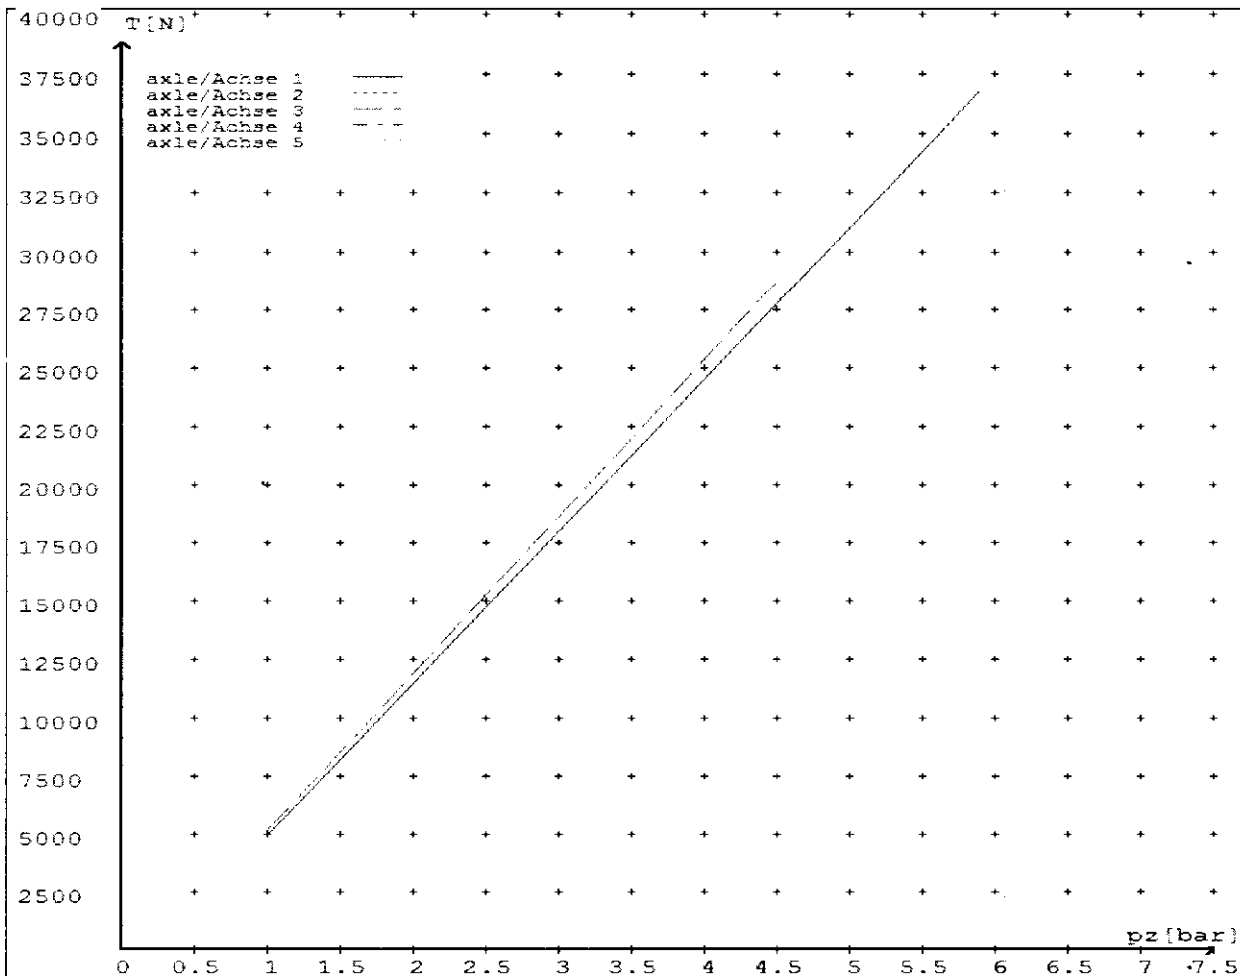

Statement of Compliance with the New Zealand Heavy Brake Rule


Documentation required supporting Statements of Compliance with the New Zealand Heavy Brake Rule, to be made available to the Statutory Authority on request, must include all calculations and test reports.

Confirmation of compliance

I confirm that the vehicle identified on page 1 of this Statement of Compliance complies with all relevant requirements of the current New Zealand Heavy Vehicle Brake Rule 32015/2, Schedule 5.

Date: 20th Nov 2012

Signed (pp.):



Certifier's identification

Name: J E Hirst

Phone (bus): (09) 980 7300 Fax (bus): (09) 980 7306

Postal address: Transport Specialties, Cnr Kerrs & Ash Roads

Wiri, Auckland, PO Box 98 971 Manukau City 2241

Position: JEH

Confirmation of continued compliance of modification

I confirm the brake system of the vehicle identified on page 1 of this Statement of Compliance as modified by myself, continues to comply with all the relevant requirements of the current New Zealand Heavy Vehicle Brake Rule 32015/2, Schedule 5.

Date: _____

Signed: _____

Certifier's identification: JEH

Name:

Phone (bus): (09) 980 7300 Fax (bus): (09) 980 7306

Postal address: Transport Specialties Ltd

Cnr Kerrs & Ash Roads, Wiri, Auckland

PO Box 98 971, Manukau City 2241

NOTICE TO VEHICLE OPERATOR

This trailer is equipped with an Electronic Brake System.

To comply with the New Zealand Heavy Vehicle Brake RULE, it must be used only in conjunction with a truck/tractor equipped with a 5 or 7 pin ABS/EBS power supply socket.

Failure to connect to such supply invalidates Brake Rule compliance.

The trailer ABS/EBS warning light on the towing vehicle dashboard must illuminate when the ignition is switched on and extinguish when the vehicle is in motion.

If the light does not illuminate when ignition is switched on, the system must be checked. If the light remains illuminated when the vehicle is in motion, Brake Rule compliance is compromised. Repairs must be made as soon as possible.

NB;

If this vehicle is fitted with mechanical (spring) suspension, the load sense valving has been adjusted to suit exactly the performance of the original springs. In event of replacement being required, original equipment springs **must** be fitted to ensure correct ongoing operation. Fitment of non genuine springs can affect operation and therefore, compliance.

If you are unsure of your responsibilities and/or obligations. please contact either the vehicle manufacturer or myself.



C J Clarke (CJC HVEK)

NOTICE TO VEHICLE OPERATOR

THIS VEHICLE HAS A BRAKE SYSTEM WHICH HAS BEEN DESIGNED AND FITTED IN ACCORDANCE WITH THE NEW ZEALAND HEAVY VEHICLE BRAKE RULE 32015: SCHEDULE 5.

IF THIS VEHICLE IS OPERATED IN CONJUNCTION WITH NON-CODED VEHICLES, THERE MAY BE OPERATIONAL FACTORS WHICH NEED TO BE TAKEN INTO CONSIDERATION.

PLEASE REFER TO THE CERTIFIER FOR FURTHER INFORMATION.

EXCERPT FROM NZ HEAVY VEHICLE BRAKE RULE 32015

10.1 Responsibilities of operators

A person who operates a vehicle must ensure that the vehicle complies with this Rule

10.2 Responsibilities of repairers

A person who repairs or adjusts a brake must ensure that the repair or adjustment:

(a) does not prevent the vehicle from complying with the rule : and

(b) complies with Land Transport Rule: Vehicle Repair 1998.

10.3 Responsibilities of modifiers

A person who modifies a vehicle so as to affect the braking performance of the vehicle must:

(a) ensure that the modification does not prevent the vehicle from complying with this rule: and

(b) notify the operator that the vehicle must be inspected and, if necessary, Certified by a person or organisation appointed to carry out specialist inspection and certification of heavy vehicle brakes.

10.5 Responsibilities of manufactures and retailers

A person may manufacture, stock, or offer for sale a brake or its components. Intended for fitting to a vehicle to be used on New Zealand roads, only if that brake or component:

(a) complies with this Rule: and

(b) does not prevent a repair to a vehicle, its structure, systems, components and equipment from complying with this Rule.

IF YOU ARE UNSURE ABOUT YOUR RESPONSIBILITIES, PLEASE CONTACT THE VEHICLE MANUFACTURER, OR MYSELF.

COMPLAINTS. Complaints and Warranty issues which relate to Brake Certification will be acknowledged within 7 working days and a resolution proposed within 25 working days.

Resolution of complaints and Warranty issues is subject to Transpecs Warranty policy.

Customers have the right to appeal to the Land Transport Safety Authority if dissatisfied with a Compliance issue. (refer LTNZ Deed Of Appointment Para 47.4) NZTA Helpdesk 0800 699 000


C J Clarke (CJC HVEK)

Après avoir apposé la plaquette ALB sur le véhicule,
prière de la recouvrir de vernis clair.



NZ TRANSPORT AGENCY
WAKA KOTAHU

NATIONAL OFFICE
50 Victoria Street
Private Bag 6995
Wellington 6141
New Zealand
T 64 4 894 5400
F 64 4 894 6100
www.nzta.govt.nz

Exemption: HV812/371

**EXEMPTION FROM SPECIFIED REQUIREMENTS OF LAND TRANSPORT RULE:
Heavy-vehicle Brakes 2006, Rule 32015**

Pursuant to Section 166(1) of the Land Transport Act 1998, and pursuant to the powers delegated to me, I Jackie Hartley, Administrator (Assessments) hereby exempt the motor vehicle specified in Schedule 1 hereto from the section of Land Transport Rule: Heavy-vehicle Brakes 2006 (the Rule) listed in Schedule 2, subject to the conditions specified in Schedule 3.

SCHEDULE 1:

Make/Model: **Domett Truck & Trailer Ltd, 5 axle full-trailer**
VIN/CHASSIS: **7A9E20014CT023113**

SCHEDULE 2: - Exempted Requirement

Section 2.3(9); The parking brake of a vehicle, whether or not it is being operated as a combination vehicle, must be able to be applied by the driver from the normal driving position using one control only.

SCHEDULE 3: - Conditions of this exemption:

- 1) The vehicle must be fitted with a Wabco park-release emergency valve (PREV), Part Number: 971 002 900 0.
- 2) The vehicle must be fitted with the Wabco PREV name plate, Part Number 971 002 103 4, adjacent to the PREV.
- 3) The vehicle must still be fitted with a parking brake that complies with all parking brake requirements in the Rule other than the requirement in Clause 2.3(9) of the Rule.
- 4) The installation of the PREV must be approved in writing by Gough Transpecs or an NZ Transport Agency appointed HVEK certifier acting on behalf of, and under instruction from, Gough Transpecs; Gough Transpecs must keep a written record of all approvals.
- 5) An HVEK certifier in 4) must be fully trained in end of line procedures for Wabco electronically controlled braking systems
- 6) Gough Transpecs must provide full operator training in the use of the PREV and furnish the operator with full written operating instructions for the PREV.
- 7) The vehicle must not be modified in any way while operating under this exemption.
- 8) This original exemption must be kept by Gough Transpecs.
- 9) A copy of this exemption (printed on a silver WABCO Sticker) must be affixed to the exempted vehicle as close to the WABCO PREV as possible.
- 10) The sticker in 9) must be legible and include all printed areas of this original exemption letter.
- 11) This exemption can be revoked at any time in writing by the NZ Transport Agency.

Signed at Wellington this 20th day of November 2012.

Jackie Hartley
Administrator (Assessments)

Dopo l'applicazione della targhetta ALB all'automezzo,
si raccomanda di spruzzarvi sopra dello smalto.

Nach dem Aufbringen des ALB-Schildes am Fahrzeug, bitte Schild mit Klarlack übersprühen.

After the ALB sign has been attached to the vehicle,
please overspray the sign with transparent varnish.

1139797F

