

Heavy Vehicle Specialist Certificate

Must be presented to a Transport Service Delivery Agent
 Heavy Vehicle Specialist Inspector and Inspecting Organisation

Heavy Vehicle Specialist Inspector's or Manufacturing Inspecting Organisation's Name (PRINT IN CAPS)



ID



Vehicle Registration*

VIN/Chassis Number

7A9E35019E1023265

Component being certified:

- Chassis Modification
- Load Anchorage
- Log Bolsters
- Towing Connection
- Brakes
- SRT
- PSV Stability
- PSV Rollover
- Swept Path
- PBS

Certification Category

HUEK

Description of Work

Carry out compliance to the NZ Heavy Vehicle Brake Rule.

Ride stability function activated

Code/Standard/Rule Certified to

HUBNZ32005/3 SCHEDULES

Component Load Rating(s)

32000 KG.

General Drawing Number(s)

N/A

Supporting Documents

Brake Design Certificate - JH140708.

Special Conditions*

WARNING - CAR MUST ILLUMINATE WHEN IGNITION SWITCHED ON & THEN EXTINGUISH IMMEDIATELY OR WHEN VEHICLE EXCEEDS 7KPH

Certification Expiry Date (if applicable)

N/A

or

Hubodometer Reading (whichever comes first)

Declaration

I the undersigned, declare that I am the Heavy Vehicle Specialist Inspector identified and I hold a current valid appointment. I certify that the above mentioned vehicle component's design, manufacture and installation, and this certification complies in all respects with the Land Transport Rule: Vehicle Standards Compliance 2002 and my Appointment. To the best of my knowledge the information contained in the Certificate is true and correct.

Designer's ID (if different from inspector below)

Inspector's Signature

Inspector's Name (PRINT IN CAPS)

ID Number

Date

31.07.2014

Number

478437

CoF Vehicle Inspector ID

CoF Vehicle Inspector Signature

Date

All fields excluding those marked with * must be completed before this certificate can be accepted.

WABCO

START-UP PROTOCOL

System	Trailer EBS-E	WABCO part number	480 102 080 0
Production date	2012-10-12	Serial number	897000553700N
Serial number (modulator)	000000016877		
Fingerprint Customer EOL / Customer Development / Flash Program	W503643 / 2014-08-12 ; 00000000 / 0000-00-00 ; 00000000 / 0000-00-00		

WABCO		TRAILER EBS-E		GGVS/ADR TUEH TB 2007 - 019.00 TDB0749					
HERSTELLER MANUFACTURER CONSTRUCTEUR	DOMETT				Pin1	Pin3	Pin4		
Typ TYPE	5AFT BULK				1 ---	---	---		
Fahrzeug Identnr. Chassis Nr. Número de Chassis	7A9E35019E1023265				2 ---	---	---		
Bremsberechnungs-Nr. Brake Calculation No. Calcul de freinage no.	TP51079A				3 ALS2	ALS2	---		
POLRADZÄHNEZAHL c-d e-f POLY WHEEL TEETH c-d e-f	90	90	ABS-System ABS system Système ABS	4S/3M	4 ---	---	---		
RSS RSS RSS	Einfachbereifung Single Tire Monte simple	Lenkachse Steering axle Essieu virant			5 DIAG	DIAG	DIAG		
	Zwillingsbereifung Twin Tire Monte jumelée	X Kippkritisches Fahrzeug Critical Trailer Véhicule critique			6 ---	---	---		
Subsystems	SB	I/O	24N	7 ---					
	pm (bar)	6.5	pm (bar)	0.8 2.0 --- 6.5			(bar)		
ACHSE AXLE ESSIEU					TYP (mm)	(mm)	1.0 Pz		
1	1620	0.8 2.0	7000	4.6 0.4 1.3 --- 6.4	- 18	65	69 486 4293		
2	1620	0.8 2.0	7000	4.6 0.4 1.3 --- 6.4	- 18	65	69 486 4293		
3	1120	0.5 1.1	6000	3.9 0.3 1.3 --- 4.0	- 14 / 16	64	69 481 2365		
4	1120	0.5 1.1	6000	3.9 0.3 1.3 --- 4.0	- 14 / 16	64	69 481 2365		
5	1120	0.5 1.1	6000	3.9 0.3 1.3 --- 4.0	- 14	64	69 481 2365		

Diagnostic memory	OK	Warning lamp control	OK
Parameter setting	carried out	Stop light power supply	Not tested
EBS pressure test	Not tested	Lifting axle test	Not tested
Redundancy test	OK	ECAS height sensor calibration	Not tested
ABS sensor assignment	OK	Height sensor axle load	Not tested
RTR check	Not tested	Leak test	Not tested
Immobilizer test	Not tested	Signal outputs TEBS	Not tested
Signal inputs	Not tested	Tag axle test	Not tested

Diagnostic memory ELEX	Not tested	Signal outputs ELEX	Not tested
TailGUARDlight	Not tested	TailGUARD	Not tested

Manufacturer	DOMETT	Vehicle ident. no	7A9E35019E1023265
Vehicle type	5AFT BULK	Odometer reading	12.5 km
next Service	0 km	Trip reading	12.5 km
Tester	Chris Clarke	Signature	
Date	2014-08-12 3:26:44 p.m.		

trailer (full, semi-, centre-axle) with air brake system acc. to UN/ECE-R.13.11

please note!

distribution: DOMETT
 7A9E35019E1023265
 SODC: JH140708

This brake calculation is made under consideration of
 -the legal prescriptions mentioned above in the version valid
 at the time of making the program (V6.13.11.12).
 -the functional characteristics of our products
 as well as the data of the brake out of the test
 approvals of the axle manufacturers, and
 -the other vehicle data included in the brake calculation.
 Please check whether these data correspond to the actual vehicle data.
 Our conditions of delivery apply (particularly section 9.0).
 In any case we command to do a braking harmonisation!
 WABCOBrake V6.13.11.12 db 20.02.2014

vehicle manufacturer: DOMETT
 trailer model : SAFT BULK
 trailer type : 5-axle-full-trailer
 remarks : air / hydraulic / VA suspension.
 WABCO TRAILER - EBS E
 TRISTOP 3+4: T.14/16
 265/70 R 19,5

axle 1 + 2 + 3 + 4 + 5 : SAF, SBW 1937, TDB 0749 ECE,

		<u>unladen</u>	<u>laden</u>
total mass	P in kg	6600	32000
axle 1	P1 in kg	1620	7000
axle 2	P2 in kg	1620	7000
axle 3	P3 in kg	1120	6000
axle 4	P4 in kg	1120	6000
axle 5	P5 in kg	1120	6000
wheel base	E in mm	5300 - 5300	
centre of gravity height	h in mm	1200	1987

		<u>axle 1</u>	<u>axle 2</u>	<u>axle 3</u>	<u>axle 4</u>	<u>axle 5</u>
no. of combined axles		1	1	1	1	1
no. of brake chambers per axle line	KDZ	2	2	2	2	2
The power output corresponds to		BZ 122.1	BZ 122.1	BZ 119.6	BZ 119.6	BZ 122.1
brake chamber manufacturer		Meritor	Meritor	Meritor	Meritor	Meritor
chamber size		18.	18.	T.14/16	T.14/16	14.
lever length	1Bh in mm	69	69	69	69	69
brake factor	[-]	23.03	23.03	23.03	23.03	23.03
dyn. rolling radius	rdyn min in mm	421	421	421	421	421
dyn. rolling radius	rdyn max in mm	421	421	421	421	421
threshold torque	Co Nm	6.0	6.0	6.0	6.0	6.0

calculation:

chamber pressure (rdyn min)pH at z=22,5%bar	2.3	2.3	1.8	1.8	1.8
chamber pressure (rdyn max)pH at z=22,5%bar	2.3	2.3	1.8	1.8	1.8
chamber press. (servo)pcha at pm6,5bar bar	6.4	6.4	4.0	4.0	4.0
piston force ThA at pm6,5bar N	6847	6847	3784	3784	3784
brake force (rdyn min)T lad. at pm6,5bar N	51778	51778	28531	28531	28531
brake force (rdyn max)T lad. at pm6,5bar N	51778	51778	28531	28531	28531
brake force within 1 % rolling friction proportion	%	21.2	21.2	19.2	19.2

braking rate z laden 0.603 for rdyn min
 z = sum (TR) / PRmax 0.603 for rdyn max

Trailer may only be operated in combination with trucks/tractors with
 ISO 7638 supply (5 or 7 polar).

brake diagram :

maximum pressure: 8.5 bar

axle 1:

valve 1: 971 002 ... 0 WABCO
EBS emergency valve

valve 2: 480 207 0.. 0 WABCO or 480 207 2.. 0
EBS relay valve

brake cylinder: Meritor 18HSCLD64

axle 2:

valve 1: 971 002 ... 0 WABCO
EBS emergency valve

valve 2: 480 207 0.. 0 WABCO or 480 207 2.. 0
EBS relay valve

brake cylinder: Meritor 18HSCLD64

axle 3:

valve 1: 971 002 ... 0 WABCO
EBS emergency valve

valve 2: 480 102 ... 0 WABCO
EBS trailer modulator

brake cylinder: Meritor 1416HTLD64

axle 4:

valve 1: 971 002 ... 0 WABCO
EBS emergency valve

valve 2: 480 102 ... 0 WABCO
EBS trailer modulator

brake cylinder: Meritor 1416HTLD64

axle 5:


valve 1: 971 002 ... 0 WABCO
EBS emergency valve

valve 2: 480 102 ... 0 WABCO
EBS trailer modulator






brake cylinder: Meritor 14HSCLD64

test type III (zIII = 0.30) for rdyn min : axle1 axle2 axle3 axle4 axle5
at pm 3.6 bar => pcha in bar : 3.1 3.1 2.3 2.3 2.3
test type III (zIII = 0.06), for rdyn min : axle1 axle2 axle3 axle4 axle5
at pm 1.3 bar => pcha in bar : 0.8 0.8 0.7 0.7 0.7

brake chamber pressure laden

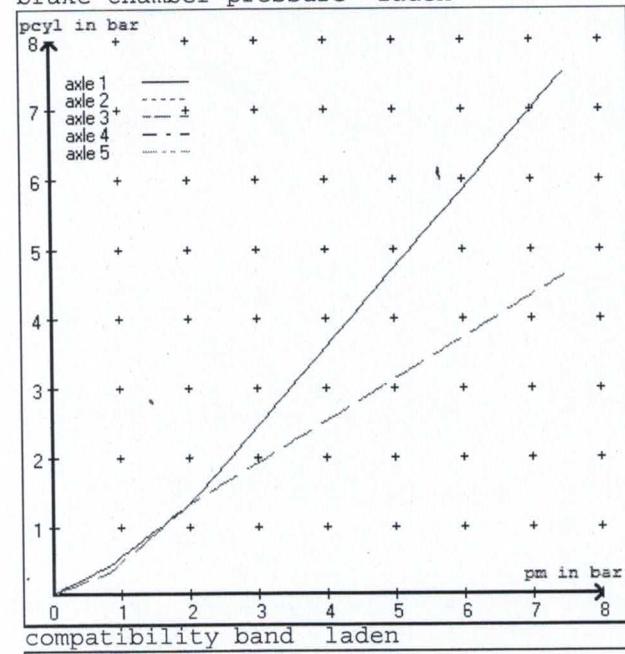

brake chamber pressure unladen

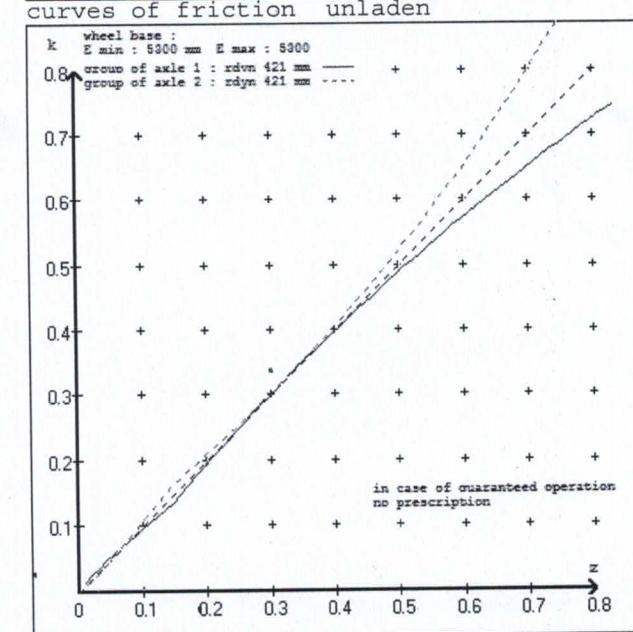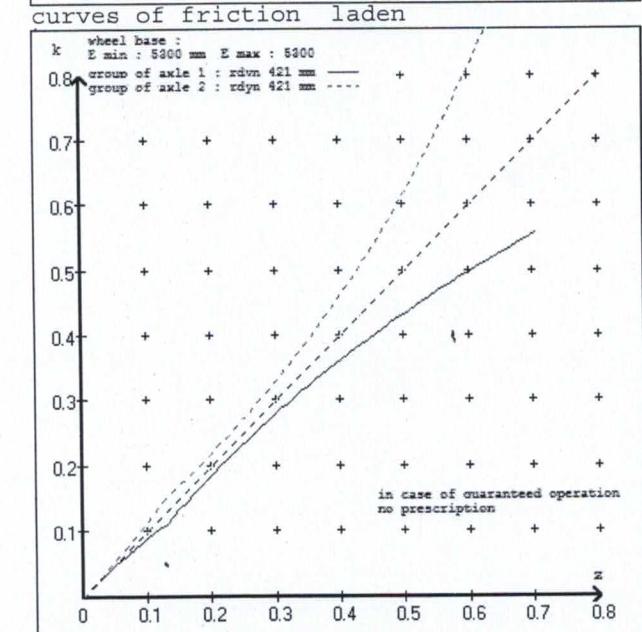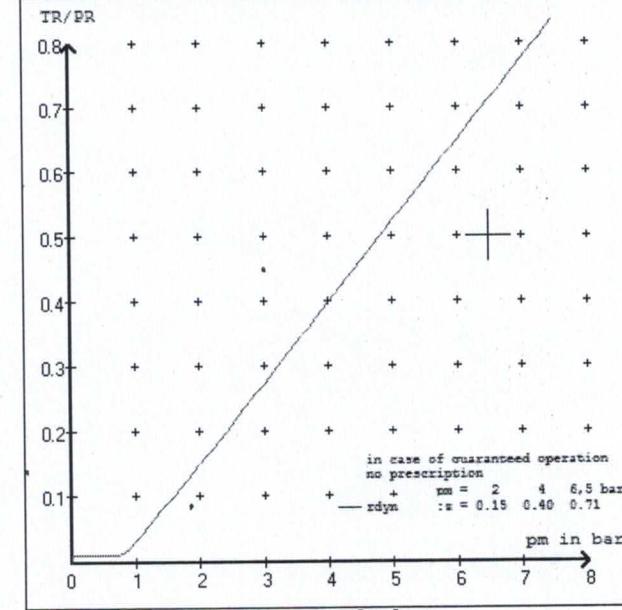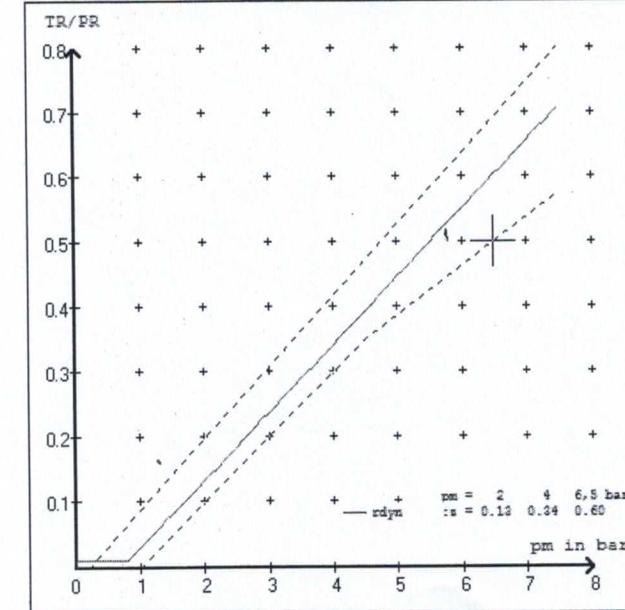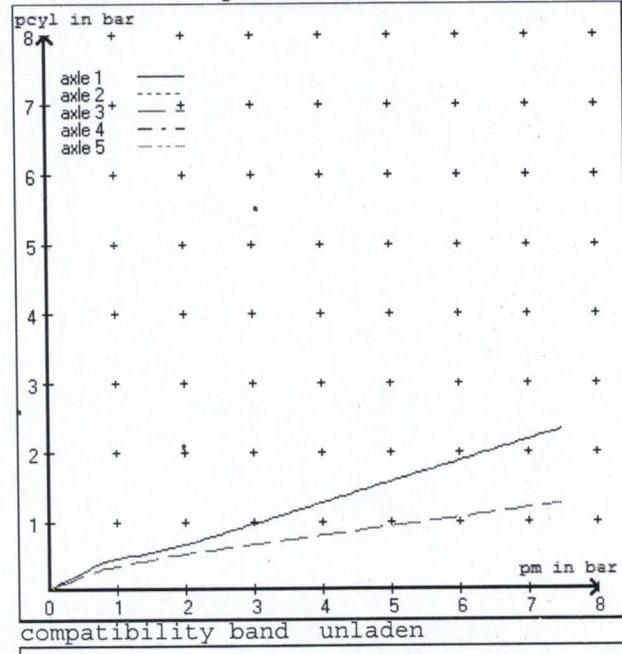

vehicle manufacturer: DOMETT
 trailer model : 5AFT BULK
 trailer type : 5-axle-full-trailer

brake chamber and lever length :

axle 1 :	2 x type/diameter	18. (Meritor)	lever length 69 mm
axle 2 :	2 x type/diameter	18. (Meritor)	lever length 69 mm
axle 3 :	2 x type/diameter	T.14/16 (Meritor)	lever length 69 mm
axle 4 :	2 x type/diameter	T.14/16 (Meritor)	lever length 69 mm
axle 5 :	2 x type/diameter	14. (Meritor)	lever length 69 mm

brake diagram :

valve :

971 002 ... 0	WABCO EBS emergency valve	
480 207 0.. 0	WABCO EBS relay valve	or 480 207 2.. 0
480 102 ... 0	WABCO EBS trailer modulator	

EBS input data

=====

vehicle manufacturer:	DOMETT
trailer model	: 5AFT BULK
trailer type	: 5-axle-full-trailer
brake calculation no.	: TP 51079A

tire circumference main axle	: 2650 for rdyn max
tire circumference auxiliary axle	: 2650 for rdyn max

assignment pm / deceleration z: pm 0.8 bar z = 0.010	
(laden condition)	2.0 bar z = 0.134
	6.5 bar z = 0.600

control pressure pm			6,5	control pressure pm		0.8	2.0	6.5
axle	axle load unladen	bellow pr. unladen	brake pr. unladen	axle load laden	bellow pr. laden	brake pr. laden		
1	1620	to be entered by the vehicle manufact.	2.0	7000	to be entered by the vehicle manufact.	0.4	1.3	6.4
2	1620		2.0	7000		0.4	1.3	6.4
3	1120		1.1	6000		0.3	1.3	4.0
4	1120		1.1	6000		0.3	1.3	4.0
5	1120		1.1	6000		0.3	1.3	4.0

The unladen values indicated in the above table are values for the basic parameter set. Higher unladen axle loads and liftaxles are automatically recognized and do not require separate adjustment.

The above unladen axle loads must not be fallen below.

=====

axle 1	axle 2	axle 3	axle 4	axle 5
axle load pcyl				
1620	2.0	1620	1120	1120
2120	2.4	2120	1.1	1.1
2620	2.8	2620	1.4	1.4
3120	3.2	3120	1.7	1.7
3620	3.6	3620	2.0	2.0
4120	4.0	4120	2.3	2.3
4620	4.5	4620	2.6	2.6
5120	4.9	5120	2.9	2.9
7000	6.4	7000	3.2	3.2
		6.4	4.0	4.0
			6000	6000
				4.0

data sheet to ECE vehicle type-approval certificate concerning braking equipment: according to ECE R13 annex 11

axle 1 : reference axle: SAF	SBW 1937	brake lining:	Jurid 539
test report :	TDB 0749 ECE	date	: 20130930 30.09.2013
axle 2 : reference axle: SAF	SBW 1937	brake lining:	Jurid 539
test report :	TDB 0749 ECE	date	: 20130930 30.09.2013
axle 3 : reference axle: SAF	SBW 1937	brake lining:	Jurid 539
test report :	TDB 0749 ECE	date	: 20130930 30.09.2013
axle 4 : reference axle: SAF	SBW 1937	brake lining:	Jurid 539
test report :	TDB 0749 ECE	date	: 20130930 30.09.2013
axle 5 : reference axle: SAF	SBW 1937	brake lining:	Jurid 539
test report :	TDB 0749 ECE	date	: 20130930 30.09.2013

calc. verif. of residual (hot) braking force type III

(item 4.2.1 of appendix 2 to annex 11)

axle 1	(rdyn 421 mm)	T = 23.9 % Fe
axle 2	(rdyn 421 mm)	T = 23.9 % Fe
axle 3	(rdyn 421 mm)	T = 15.4 % Fe
axle 4	(rdyn 421 mm)	T = 15.4 % Fe
axle 5	(rdyn 421 mm)	T = 15.4 % Fe

calculated actuator stroke in mm

(item 4.3.1.1 of appendix 2 to annex 11)

axle 1	(sp = 58 mm)	s = 39 mm
axle 2	(sp = 58 mm)	s = 39 mm
axle 3	(sp = 55 mm)	s = 39 mm
axle 4	(sp = 55 mm)	s = 39 mm
axle 5	(sp = 55 mm)	s = 39 mm

average thrust output in N at $p_m = 6,5$ bar (however max. $p_{cha} = 7,0$ bar)

axle1	ThA = 6847 N
axle2	ThA = 6847 N
axle3	ThA = 3784 N
axle4	ThA = 3784 N
axle5	ThA = 3784 N

calc. residual (hot) braking force in N

(item 4.3.1.4 of appendix 2 to annex 11)

axle 1	(rdyn 421 mm)	T = 40423 N
axle 2	(rdyn 421 mm)	T = 40423 N
axle 3	(rdyn 421 mm)	T = 22363 N
axle 4	(rdyn 421 mm)	T = 22363 N
axle 5	(rdyn 421 mm)	T = 22363 N

basic test type III
 of subject (calculated)
 trailer (E) residual

braking rate of the vehicle (hot)braking
(item 4.3.2 to appendix 2 to annex 11) 0.60 0.47

required braking rate
(items 1.5.3 and 1.7.2 to annex 11) $\geq 0,4$ and
 $\geq 0,6 \cdot E (0,36)$

axle 1	(rdyn 421 mm)	T = 40423 N
axle 2	(rdyn 421 mm)	T = 40423 N
axle 3	(rdyn 421 mm)	T = 22363 N
axle 4	(rdyn 421 mm)	T = 22363 N
axle 5	(rdyn 421 mm)	T = 22363 N

basic test type III
 of subject (calculated)
 trailer (E) residual

braking rate of the vehicle (hot)braking
(item 4.3.2 to appendix 2 to annex 11) 0.60 0.47

spring parking brake

		axle 3	axle 4
no of TRISTOP-actuators per axle line KDZ		2	2
TRISTOP-actuator type		T.14/16	T.14/16
lever length	lBh in mm	69	69
stat. tyre radius	rstat max in mm	401	401
at a stroke of	s in mm	30	30
min. force of spring brake	TFZ in N	6160	6160
sp.brake chamber no Meritor.....		4	4
release pressure	pLs in bar	4.5	4.5

calculation:

ratio until road		3.9674	3.9674
iFb = lBh*Eta*C*rBt/(rBn*rstat)		401	401
for rstat in mm		48188	48188
brake force of spring br. Tf in N		48188	48188
Tf = (TFZ*KDZ-2*Co/lBh)*iFb			
braking rate	zf laden	0.317	
zf = sum (Tf)/P + 0,01			

Test of the frictional connection required by the parking brake

minimum wheelbase/minimum supporting width min Ef necessary
to fulfil the regulations

$$\text{min Ef} = E * (1 - PR/P + zferf * h/E) / (1 - zferf / (fzul * nf/ng))$$

$$\begin{aligned} \text{min Ef} &= 4040 \text{ mm} \quad \text{for } E = 5300 \text{ mm} \\ \hline \text{min Ef} &= 4040 \text{ mm} \quad \text{for } E = 5300 \text{ mm} \end{aligned}$$

min Ef =	minimum distance between front axle(s) (trailer) or support (semitrailer)
and the rear axle(s) (resultant of the bogie)	
E =	wheel base
fzul = 0.80	maximum permissible frictional connection required
zferf = 0.18	maximum required braking ratio of the parking brake
h = 1987 mm	height of center of gravity - laden
PR = 18000 kg	maximum bogie mass - laden
P = 32000 kg	maximum total mass - laden
nf = 2	no. of axle(s) with TRISTOP spring brake actuators
ng = 3	no. of bogie axle(s)


reference values

reference values for z = 50% for max rdyn: 421 mm

	pz [bar]	T [N]	T [N]
axle 1	1.0 6.4	4863 42934	
axle 2	1.0 6.4	4863 42934	
axle 3	1.0 4.0		4819 23657
axle 4	1.0 4.0		4819 23657
axle 5	1.0 4.0		4819 23657

VIN - no.:

	Axe(s) / Achse(n)				
brake cylinder type (service / parking) Bremszylinder Typ (Betrieb / Fest)	18./	18./	T.14/16	T.14/16	14./
Maximum stroke smax = ... mm maximaler Hub smax = ... mm	65	65	64	64	64
Lever length = ... mm Hebellänge = ... mm	69.08	69.08	69.08	69.08	69.08

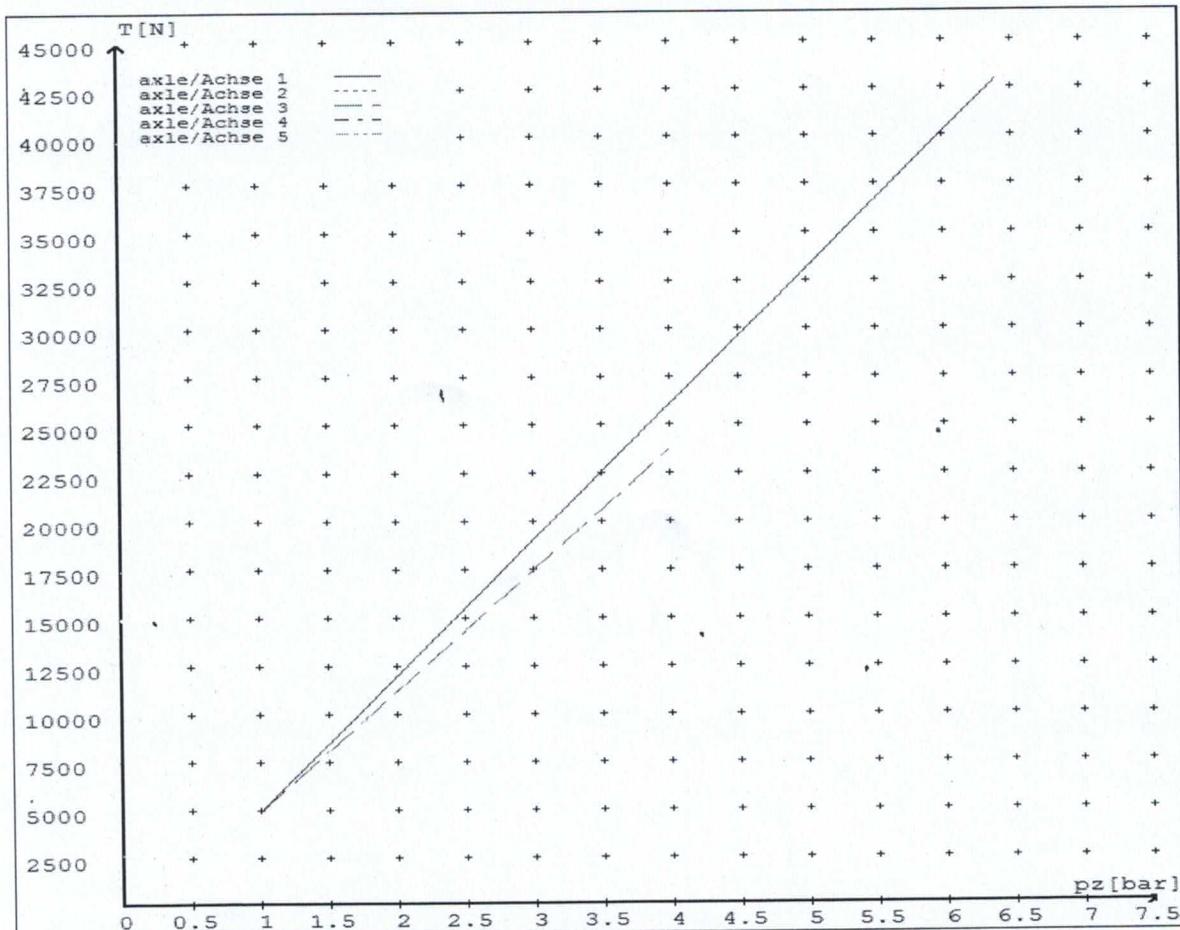

HVBR WORKSHEET
(PROCEDURE & COMPLIANCE DOCUMENTATION SHEET)

CERTIFICATE No. JH140708

CUSTOMER NAME

DOMETT TRAILERS LTD

CUSTOMER ORDER No.

4215

DATE RECEIVED

June 14

VEHICLE TYPE

5 AXLE FULL TRAILER

REG No.

CHASSIS No.

7A9E35019E1023265

BRIEF SPECIFICATION AS CERTIFIED TO HVBR

BRAKE CHAMBERS:

Ax #	Make/model	Max stroke	Lever length
1&2	TSE 18HSCLD65	65 mm	69 mm
3&4	TSE 1416HTLD64	64 mm	69 mm
5	TSE 14HSCLD64	64 mm	69 mm

BRAKE SYSTEM: WABCO EBS : RSS ACTIVATED

TEST POINTS FITTED: 3 4 5 7

FRICTION LINING: OEM
(All) Lining Brand JURID 539 Aftermarket

EBS CONTROL: SPECIAL CONDITIONS APPLY – SEE INSTRUCTION ON LT400:

VALVES: AS PER BRAKE CALCULATION TP 51079 & SO1554918

TYRE SIZE: 265 70 R 19.5

NOTES

PACKING SLIP NO.

SO1554918

PROCESS TIME:

1

BRAKE CALC #TP51079

COMPLETION DATE : 9th July 2014

SIGNATURE (pp.): _____

Statement of Compliance with the New Zealand Heavy Brake Rule

Documentation required supporting Statements of Compliance with the New Zealand Heavy Brake Rule, to be made available to the Statutory Authority on request, must include all calculations and test reports.

Confirmation of compliance

I confirm that the vehicle identified on page 1 of this Statement of Compliance complies with all relevant requirements of the current New Zealand Heavy Vehicle Brake Rule 32015/3, Schedule 5.

Date: 9th July 2014

Signed (pp.): _____

Certifier's identification

Name: J E Hirst

Phone (bus): (09) 980 7300 Fax (bus): (09) 980 7306

Postal address: Transport Specialties, Cnr Kerrs & Ash Roads
Wiri, Auckland, PO Box 98 971 Manukau City 2241

Position: JEH

Confirmation of continued compliance of modification

I confirm the brake system of the vehicle identified on page 1 of this Statement of Compliance as modified by myself, continues to comply with all the relevant requirements of the current New Zealand Heavy Vehicle Brake Rule 32015/3, Schedule 5.

Date: _____ Signed: _____

Certifier's identification: JEH

Name:

Phone (bus): (09) 980 7300 Fax (bus): (09) 980 7306

Postal address: Transport Specialties Ltd

Cnr Kerrs & Ash Roads, Wiri, Auckland

PO Box 98 971, Manukau City 2241