

# Heavy Vehicle Specialist Certificate

Must be presented to a CoF (Heavy) Inspecting Organisation  
Heavy Vehicle Specialist Inspector and Inspecting Organisation

Heavy Vehicle Specialist Inspector's or Manufacturing Inspecting Organisation's Name (PRINT IN CAPS) **Chris Clarke** ID **CJC**

Vehicle Registration\* VIN/Chassis Number **7A9E20012F1023339**

Component being certified:

<input type="checkbox"/> Chassis Modification	<input type="checkbox"/> Load Anchorage	<input type="checkbox"/> Log Bolsters
<input type="checkbox"/> Towing Connection	<input checked="" type="checkbox"/> Brakes	<input type="checkbox"/> SRT
<input type="checkbox"/> PSV Stability	<input type="checkbox"/> PSV Rollover	<input type="checkbox"/> Swept Path
<input type="checkbox"/> PBS		

Certification Category **HVEK**

Description of Work

**CERTIFY TO SCHEDULE 5**

**ROLL STABILTY FUNCTION ACTIVATED**

Code/Standard/Rule Certified to **HVBR 32015/3 Schedule 5** Component Load Rating(s) **33000KG**

General Drawing Number(s) **N/A**

Supporting Documents **BRAKE RULE CERTIFICATE - JH150101**


Special Conditions\* **WARNING LAMP MUST ILLUMINATE WHEN IGNITION IS SWITCHED ON & THEN EXTINGUISH IMMEDIATELY OR WHEN VEHICLE SPEED EXCEEDS 7 KPH**

Certification Expiry Date (if applicable) **N/A** or Hubodometer Reading (whichever comes first)

**Declaration**

I the undersigned, declare that I am the Heavy Vehicle Specialist Inspector identified and I hold a current valid appointment. I certify that the above mentioned vehicle component's design, manufacture and installation, and this certification complies in all respects with the Land Transport Rule: Vehicle Standards Compliance 2002 and my Appointment. To the best of my knowledge the information contained in the Certificate is true and correct.

Designer's ID (if different from inspector below)

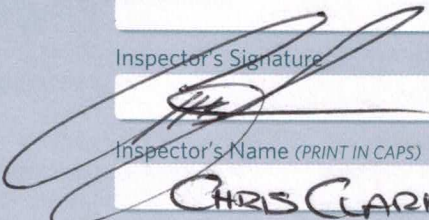Inspector's Signature 

Inspector's Name (PRINT IN CAPS) **CHRIS CLARKE** ID Number **CJC**

Date **5-Mar-15** Number **504517**

CoF Vehicle Inspector ID CoF Vehicle Inspector Signature Date

All fields excluding those marked with \* must be completed before this certificate can be accepted.

trailer (full, semi-, centre-axle) with air brake system acc. to UN/ECE-R.13.11

distribution: DOMETT  
 7A9E20012F1023339  
 SODC: JH150101

please note!

This brake calculation is made under consideration of  
 -the legal precriptions mentioned above in the version valid at the time of making the program (V6.14.04.20).  
 -the functional characteristics of our products as well as the data of the brake out of the test approvals of the axle manufacturers, and  
 -the other vehicle data included in the brake calculation.  
 Please check whether these data correspond to the actual vehicle data.  
 Our conditions of delivery apply (particularly section 9.0).  
 In any case we commend to do a braking harmonisation!  
 WABCOBrake V6.14.04.20 db 08.07.2014

vehicle manufacturer: DOMETT  
 trailer model : 5AFT C/SIDE  
 trailer type : 5-axle-full-trailer  
 remarks : air / hydraulic / VA suspension  
 WABCO TRAILER - EBS E  
 TRISTOP 3+4: T.14/16  
 265/70 R 19,5

axle 1 + 2 + 3 + 4 + 5 : SAF, SBW 1937, TDB 0749 ECE,

		unladen	laden
total mass	P in kg	7990	35020
axle 1	P1 in kg	2000	8000
axle 2	P2 in kg	2000	8000
axle 3	P3 in kg	1330	6340
axle 4	P4 in kg	1330	6340
axle 5	P5 in kg	1330	6340
wheel base	E in mm	7410 - 7410	
centre of gravity height	h in mm	1090	2065

	axle 1	axle 2	axle 3	axle 4	axle 5
no. of combined axles	1	1	1	1	1
no. of brake chambers per axle line	2	2	2	2	2
The power output corresponds to	BZ 122.1	BZ 122.1	BZ 119.6	BZ 119.6	BZ 122.1
brake chamber manufacturer	Meritor	Meritor	Meritor	Meritor	Meritor
chamber size	18.	18.	T.14/24	T.14/24	14.
lever length	lbh in mm	69	69	69	69
brake factor	[-]	23.03	23.03	23.03	23.03
dyn. rolling radius	rdyn min in mm	421	421	421	421
dyn. rolling radius	rdyn max in mm	421	421	421	421
threshold torque	Co Nm	6.0	6.0	6.0	6.0

calculation:

chamber pressure(rdyn min)pH at z=22,5%bar	2.4	2.4	2.1	2.1	2.1
chamber pressure(rdyn max)pH at z=22,5%bar	2.4	2.4	2.1	2.1	2.1
chamber press.(servo)pcha at pm6,5bar	6.3	6.3	4.8	4.8	4.8
piston force	ThA at pm6,5bar	6735	6735	4586	4586
brake force(rdyn min)T lad. at pm6,5bar	51026	51026	34622	34622	34622
brake force(rdyn max)T lad. at pm6,5bar	51026	51026	34622	34622	34622
brake force within 1 % rolling friction					
proportion	%	21.2	21.2	19.2	19.2

braking rate z laden 0.599 for rdyn min  
 z = sum (TR)/PRmax 0.599 for rdyn max

Trailer may only be operated in combination with trucks/tractors with ISO 7638 supply (5 or 7 polar).

brake diagram :

maximum pressure: 8.5 bar

axle 1:

valve 1: 971 002 ... 0                    WABCO  
          EBS emergency valve

valve 2: 480 207 0.. 0                    WABCO        or 480 207 2.. 0  
          EBS relay valve

brake cylinder: Meritor    18HSCLD64

axle 2:

valve 1: 971 002 ... 0                    WABCO  
          EBS emergency valve

valve 2: 480 207 0.. 0                    WABCO        or 480 207 2.. 0  
          EBS relay valve

brake cylinder: Meritor    18HSCLD64

axle 3:

valve 1: 971 002 ... 0                    WABCO  
          EBS emergency valve

valve 2: 480 102 ... 0                    WABCO  
          EBS trailer modulator

brake cylinder: Meritor    1424HTLD64

## axle 4:

valve 1: 971 002 ... 0                   WABCO  
          EBS emergency valve

valve 2: 480 102 ... 0                   WABCO  
          EBS trailer modulator

brake cylinder: Meritor 1424HTLD64

## axle 5:


valve 1: 971 002 ... 0                   WABCO  
          EBS emergency valve

valve 2: 480 102 ... 0                   WABCO  
          EBS trailer modulator


brake cylinder: Meritor 14HSCLD64

test type III (zIII = 0.30)	for rdyn min :	axle1	axle2	axle3	axle4	axle5	
at pm 3.5 bar =>	pcha in bar :	3.1	3.1	2.6	2.6	2.6	2.6
test type III (zIII = 0.06)	for rdyn min :	axle1	axle2	axle3	axle4	axle5	
at pm 1.2 bar =>	pcha in bar :	0.8	0.8	0.8	0.8	0.8	0.8


brake chamber pressure laden

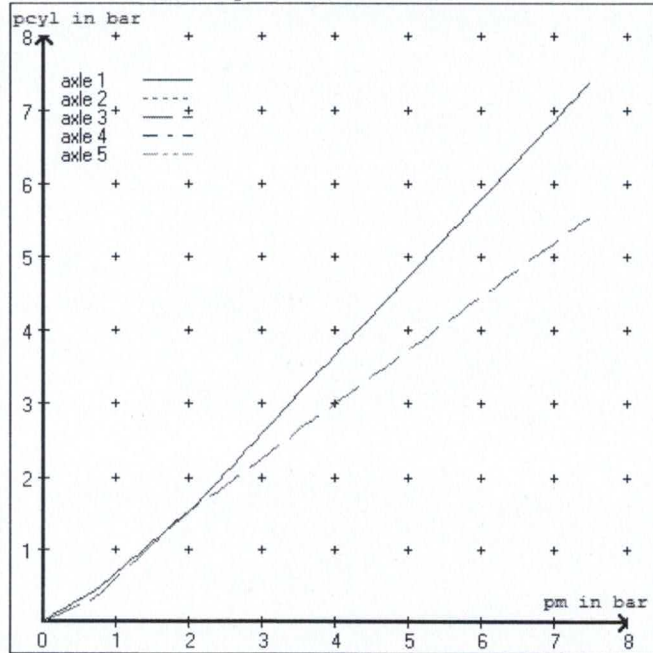


brake chamber pressure unladen

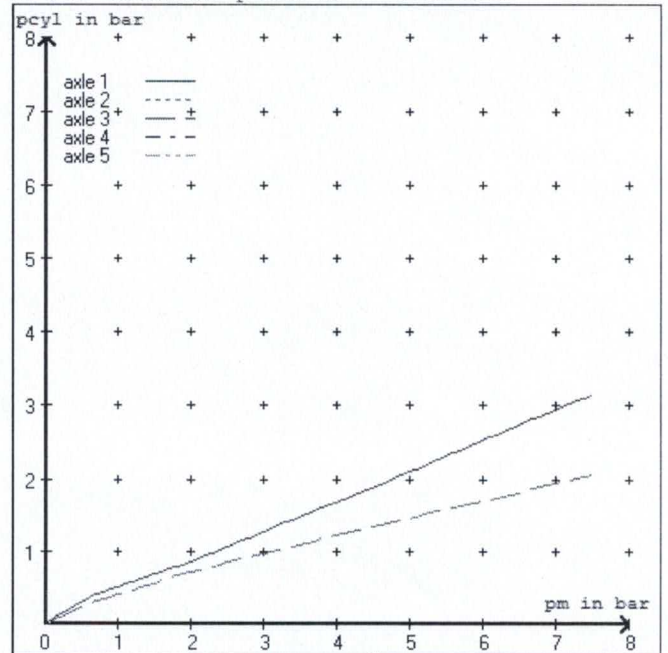


compatibility band laden

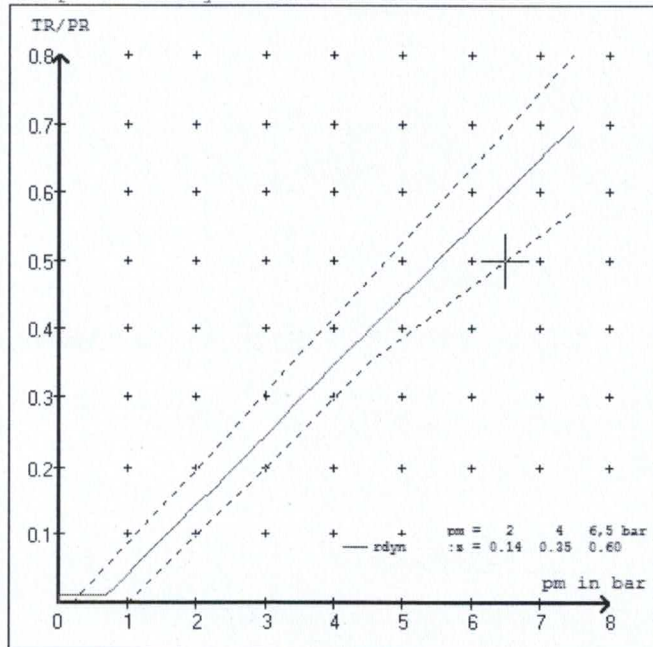


compatibility band unladen

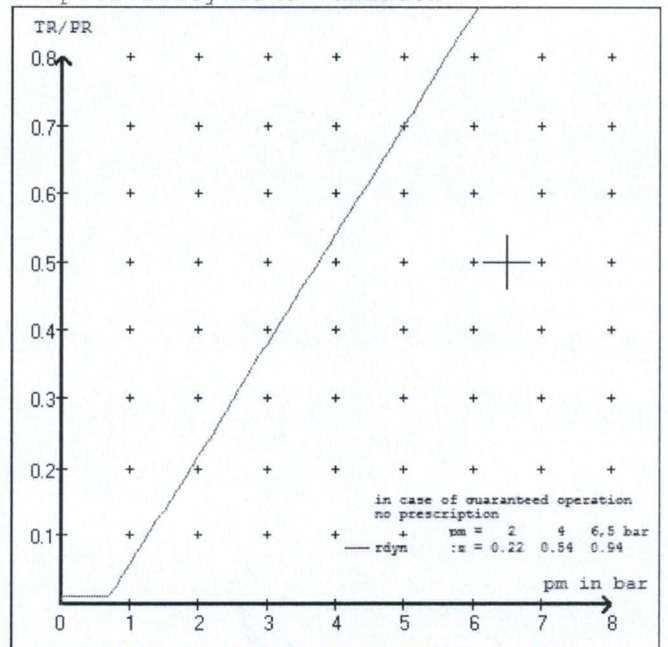

curves of friction laden

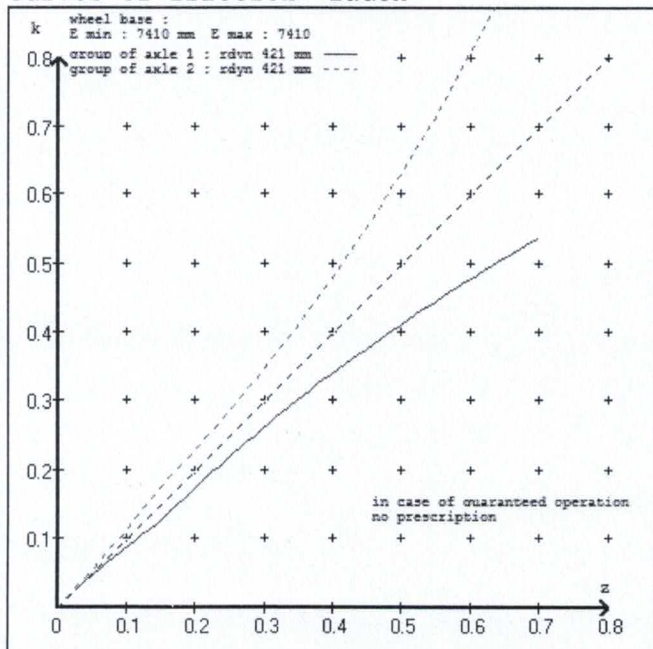

curves of friction unladen

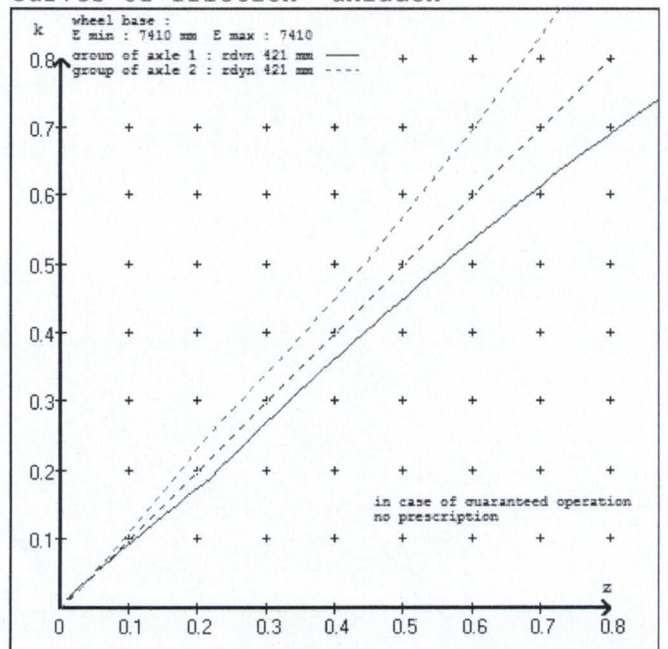

vehicle manufacturer: DOMETT  
 trailer model : 5AFT C/SIDE  
 trailer type : 5-axle-full-trailer

brake chamber and lever length :

axle 1 : 2 x type/diameter 18. (Meritor) lever length 69 mm  
 axle 2 : 2 x type/diameter 18. (Meritor) lever length 69 mm  
 axle 3 : 2 x type/diameter T.14/24 (Meritor) lever length 69 mm  
 axle 4 : 2 x type/diameter T.14/24 (Meritor) lever length 69 mm  
 axle 5 : 2 x type/diameter 14. (Meritor) lever length 69 mm

brake diagram :

valve :

971 002 ... 0 WABCO EBS emergency valve  
 480 207 0.. 0 WABCO EBS relay valve or 480 207 2.. 0  
 480 102 ... 0 WABCO EBS trailer modulator

EBS input data

=====

vehicle manufacturer: DOMETT  
 trailer model : 5AFT C/SIDE  
 trailer type : 5-axle-full-trailer  
 brake calculation no. : TP 51204A

tire circumference main axle : 2650 for rdyn max  
 tire circumference auxiliary axle : 2650 for rdyn max

assignment pm / deceleration z: pm 0.7 bar z = 0.010  
 (laden condition) 2.0 bar z = 0.142  
 6.5 bar z = 0.600

control pressure pm		6,5	control pressure pm		0.7	2.0	6.5	
axle	axle load unladen	bellow pr. unladen	brake pr. unladen	axle load laden	bellow pr. laden	brake pr. laden		
1	2000	to be	2.7	8000	to be	0.4	1.5	6.3
2	2000	entered by the vehicle manufact.	2.7	8000	entered by the vehicle manufact.	0.4	1.5	6.3
3	1330		1.8	6340		0.3	1.5	4.8
4	1330		1.8	6340		0.3	1.5	4.8
5	1330		1.8	6340		0.3	1.5	4.8

The unladen values indicated in the above table are values for the basic parameter set. Higher unladen axle loads and liftaxles are automatically recognized and do not require separate adjustment. The above unladen axle loads must not be fallen below.

=====

axle 1	axle 2	axle 3	axle 4	axle 5
axle load pcy1	axle load pcy1	axle load pcy1	axle load pcy1	axle load pcy1
2000 2.7	2000 2.7	1330 1.8	1330 1.8	1330 1.8
2500 3.0	2500 3.0	1830 2.1	1830 2.1	1830 2.1
3000 3.3	3000 3.3	2330 2.4	2330 2.4	2330 2.4
3500 3.6	3500 3.6	2830 2.7	2830 2.7	2830 2.7
4000 3.9	4000 3.9	3330 3.0	3330 3.0	3330 3.0
4500 4.2	4500 4.2	3830 3.3	3830 3.3	3830 3.3
5000 4.5	5000 4.5	4330 3.6	4330 3.6	4330 3.6
5500 4.8	5500 4.8	4830 3.9	4830 3.9	4830 3.9
8000 6.3	8000 6.3	6340 4.8	6340 4.8	6340 4.8

data sheet to ECE vehicle type-approval certificate concerning braking equipment: according to ECE R13 annex 11

axle 1 : reference axle: SAF	SBW 1937	brake lining: Jurid 539
test report :	TDB 0749 ECE	date : 20130930 30.09.2013
axle 2 : reference axle: SAF	SBW 1937	brake lining: Jurid 539
test report :	TDB 0749 ECE	date : 20130930 30.09.2013
axle 3 : reference axle: SAF	SBW 1937	brake lining: Jurid 539
test report :	TDB 0749 ECE	date : 20130930 30.09.2013
axle 4 : reference axle: SAF	SBW 1937	brake lining: Jurid 539
test report :	TDB 0749 ECE	date : 20130930 30.09.2013
axle 5 : reference axle: SAF	SBW 1937	brake lining: Jurid 539
test report :	TDB 0749 ECE	date : 20130930 30.09.2013

calc. verif. of residual (hot) braking force type III  
(item 4.2.1 of appendix 2 to annex 11)

axle 1	(rdyn 421 mm)	T = 24.2 % Fe
axle 2	(rdyn 421 mm)	T = 24.2 % Fe
axle 3	(rdyn 421 mm)	T = 18.2 % Fe
axle 4	(rdyn 421 mm)	T = 18.2 % Fe
axle 5	(rdyn 421 mm)	T = 18.2 % Fe

calculated actuator stroke in mm  
(item 4.3.1.1 of appendix 2 to annex 11)

axle 1	(sp = 58 mm)	s = 39 mm
axle 2	(sp = 58 mm)	s = 39 mm
axle 3	(sp = 56 mm)	s = 39 mm
axle 4	(sp = 56 mm)	s = 39 mm
axle 5	(sp = 56 mm)	s = 39 mm

average thrust output in N at pm = 6,5 bar (however max. pcha = 7,0 bar)

axle1	ThA = 6735 N
axle2	ThA = 6735 N
axle3	ThA = 4586 N
axle4	ThA = 4586 N
axle5	ThA = 4586 N

calc. residual (hot) braking force in N  
(item 4.3.1.4 of appendix 2 to annex 11)

axle 1	(rdyn 421 mm)	T = 39863 N
axle 2	(rdyn 421 mm)	T = 39863 N
axle 3	(rdyn 421 mm)	T = 27097 N
axle 4	(rdyn 421 mm)	T = 27097 N
axle 5	(rdyn 421 mm)	T = 27097 N

	basic test	type III
	of subject	(calculated)
	trailer (E)	residual
braking rate of the vehicle		(hot)braking
(item 4.3.2 to appendix 2 to annex 11)	0.60	0.47
required braking rate		>= 0,4 and
(items 1.5.3 and 1.7.2 to annex 11)		>= 0,6*E (0.36)

axle 1	(rdyn 421 mm)	T = 39863 N
axle 2	(rdyn 421 mm)	T = 39863 N
axle 3	(rdyn 421 mm)	T = 27097 N
axle 4	(rdyn 421 mm)	T = 27097 N
axle 5	(rdyn 421 mm)	T = 27097 N

	basic test	type III
	of subject	(calculated)
	trailer (E)	residual
braking rate of the vehicle		(hot)braking
(item 4.3.2 to appendix 2 to annex 11)	0.60	0.47
required braking rate		>= 0,4 and
(items 1.5.3 and 1.7.2 to annex 11)		>= 0,6*E (0.36)






**reference values**

reference values for z = 50% for max rdyn: 421 mm

	pz [bar]	T [N]	T [N]
axle 1	1.0	4977	
	6.3	42593	
axle 2	1.0	4977	
	6.3	42593	
axle 3	1.0		4879
	4.8		28900
axle 4	1.0		4879
	4.8		28900
axle 5	1.0		4879
	4.8		28900

VIN - no.:

	Axle(s) / Achse(n)				
brake cylinder type (service / parking) Bremszylinder Typ (Betrieb / Fest)	18./	18./	T.14/24	T.14/24	14./
Maximum stroke s <sub>max</sub> = ...mm maximaler Hub s <sub>max</sub> = ....mm	64	64	64	64	64
Lever length = ....mm Hebellänge = ....mm	69.08	69.08	69.08	69.08	69.08

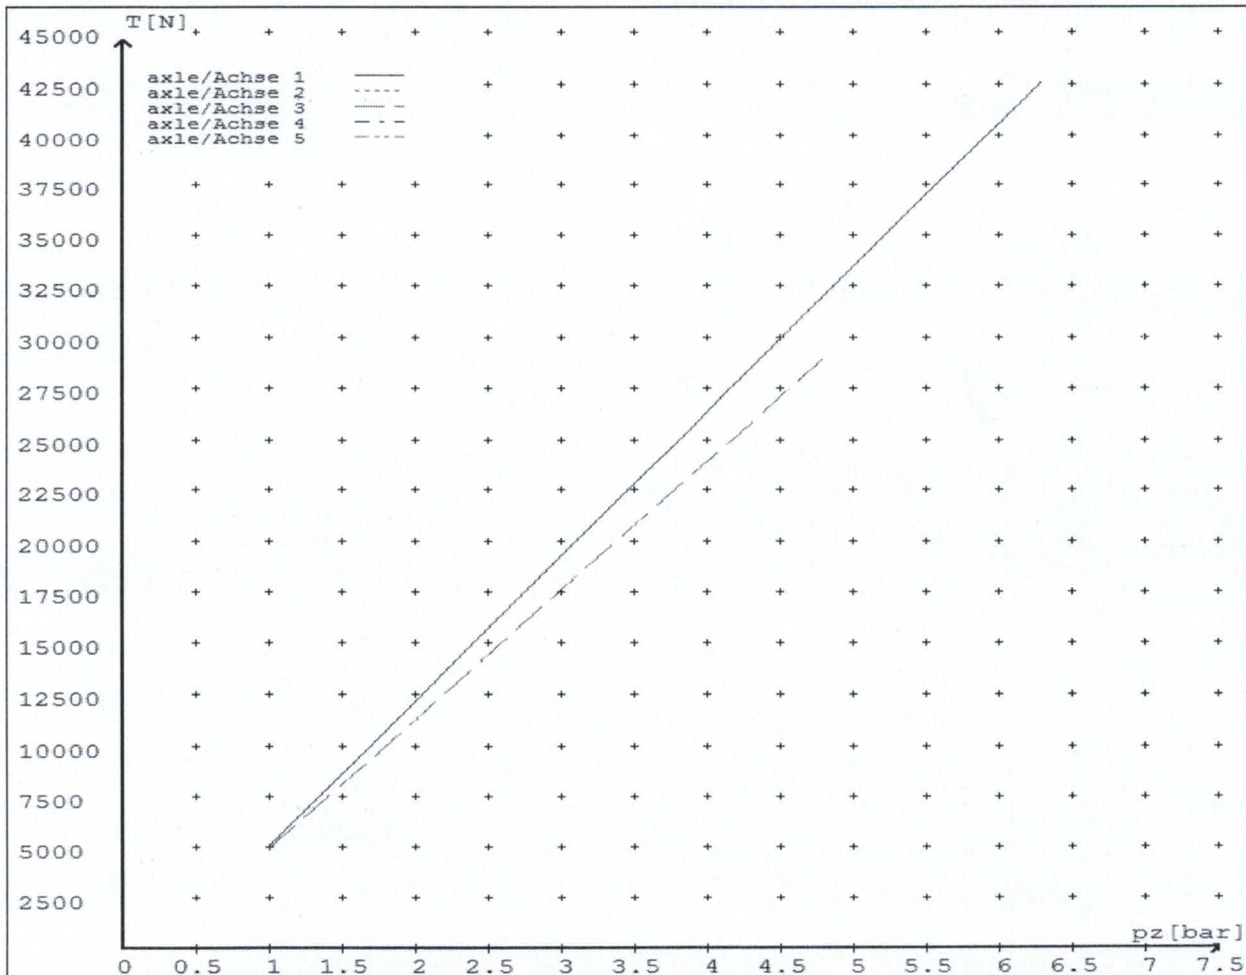

**HVBR WORKSHEET**  
(PROCEDURE & COMPLIANCE DOCUMENTATION SHEET)

CERTIFICATE No. JH150101

CUSTOMER NAME

DOMETT TRAILERS LTD

CUSTOMER ORDER No.

4329

DATE RECEIVED

Jan 2015

VEHICLE TYPE

5 AXLE FULL TRAILER

REG No.

CHASSIS No.

7A9E20012F1023339

**BRIEF SPECIFICATION AS CERTIFIED TO HVBR**

**BRAKE CHAMBERS:**

<u>Ax #</u>	<u>Make/model</u>	<u>Max stroke</u>	<u>Lever length</u>
1&2	TSE 18HSCLD65	65 mm	69 mm
3&4	TSE 1416HTLD64	64 mm	69 mm
5	TSE 14HSCLD64	64 mm	69 mm

**BRAKE SYSTEM:**

WABCO EBS : RSS ACTIVATED

# TEST POINTS FITTED:

3 4 5 7

**FRICITION LINING:**

(All) Lining Brand

OEM

JURID 539

Aftermarket

**EBS CONTROL:** SPECIAL CONDITIONS APPLY – SEE INSTRUCTION ON LT400:

**VALVES:** AS PER BRAKE CALCULATION TP51204 &

**TYRE SIZE:** 265 70 R 19.5

NOTES

PACKING SLIP NO.


PROCESS TIME:

1

BRAKE CALC #TP51204. THE MERITOR CHAMBERS ARE THE TSE VARIANT. THE 1424HTLD64 IN THE CALC ARE USED TO DETERMINE THE SERVICE BRAKE PERFORMANCE. 1616HTLD64 ARE USED TO DETERMINE THE PARK BRAKE PERFORMANCE.

COMPLETION DATE : 6<sup>th</sup> Jan 2015

SIGNATURE (pp.):

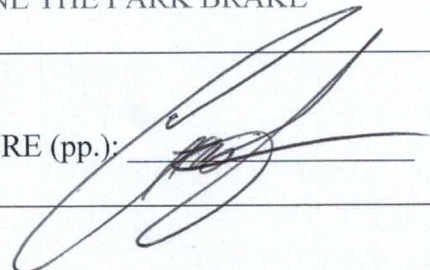

# Statement of Compliance with the New Zealand Heavy Brake Rule


Documentation required supporting Statements of Compliance with the New Zealand Heavy Brake Rule, to be made available to the Statutory Authority on request, must include all calculations and test reports.

## Confirmation of compliance

I confirm that the vehicle identified on page 1 of this Statement of Compliance complies with all relevant requirements of the current New Zealand Heavy Vehicle Brake Rule 32015/3, Schedule 5.

Date: 6<sup>th</sup> Jan 2015

Signed (pp.):

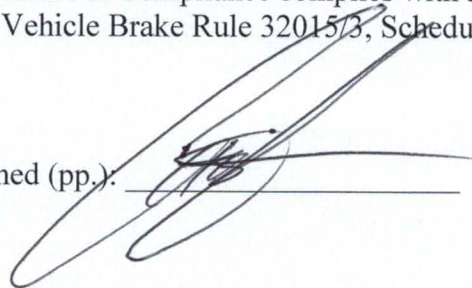

## Certifier's identification

Name: J E Hirst

Phone (bus): (09) 980 7300 Fax (bus): (09) 980 7306

Postal address: Transport Specialties, Cnr Kerrs & Ash Roads

Wiri, Auckland, PO Box 98 971 Manukau City 2241

Position: JEH

## Confirmation of continued compliance of modification

I confirm the brake system of the vehicle identified on page 1 of this Statement of Compliance as modified by myself, continues to comply with all the relevant requirements of the current New Zealand Heavy Vehicle Brake Rule 32015/3, Schedule 5.

Date: \_\_\_\_\_

Signed: \_\_\_\_\_

Certifier's identification: JEH

Name:

Phone (bus): (09) 980 7300 Fax (bus): (09) 980 7306

Postal address: Transport Specialties Ltd

Cnr Kerrs & Ash Roads, Wiri, Auckland

PO Box 98 971, Manukau City 2241




P.O.Box 98-971

South Auckland Mail Centre

J.HIRST (JEH)

DATE	<u>6-Jan-15</u>	BRAKE SYSTEM	<u>12-24V TEBS</u>
CERT. NO.	<u>JH150101</u>	OptiTURM EXEMPTION	<u>N/A</u>
VIN / CHASSIS	<u>7A9E20012F1023339</u>		
BRAKE CHAMBERS FRONT	<u>18S (TSE max stroke 65 mm)</u>		
BRAKE CHAMBERS REAR	<u>1416GC (14S) (TSE max stroke 64 mm)</u>		
SLACK LENGTH FRONT	<u>69 mm</u>	TYRE SIZE FRONT	<u>265 70 R 19.5</u>
SLACK LENGTH REAR	<u>69 mm</u>	TYRE SIZE REAR	<u>265 70 R 19.5</u>
THIS VEHICLE COMPLIES WITH THE NZ HVBR 32015/3 - SCHEDULE 5	LINING MATERIAL FRONT	<u>JURID 539</u>	
	LINING MATERIAL REAR	<u>JURID 539</u>	

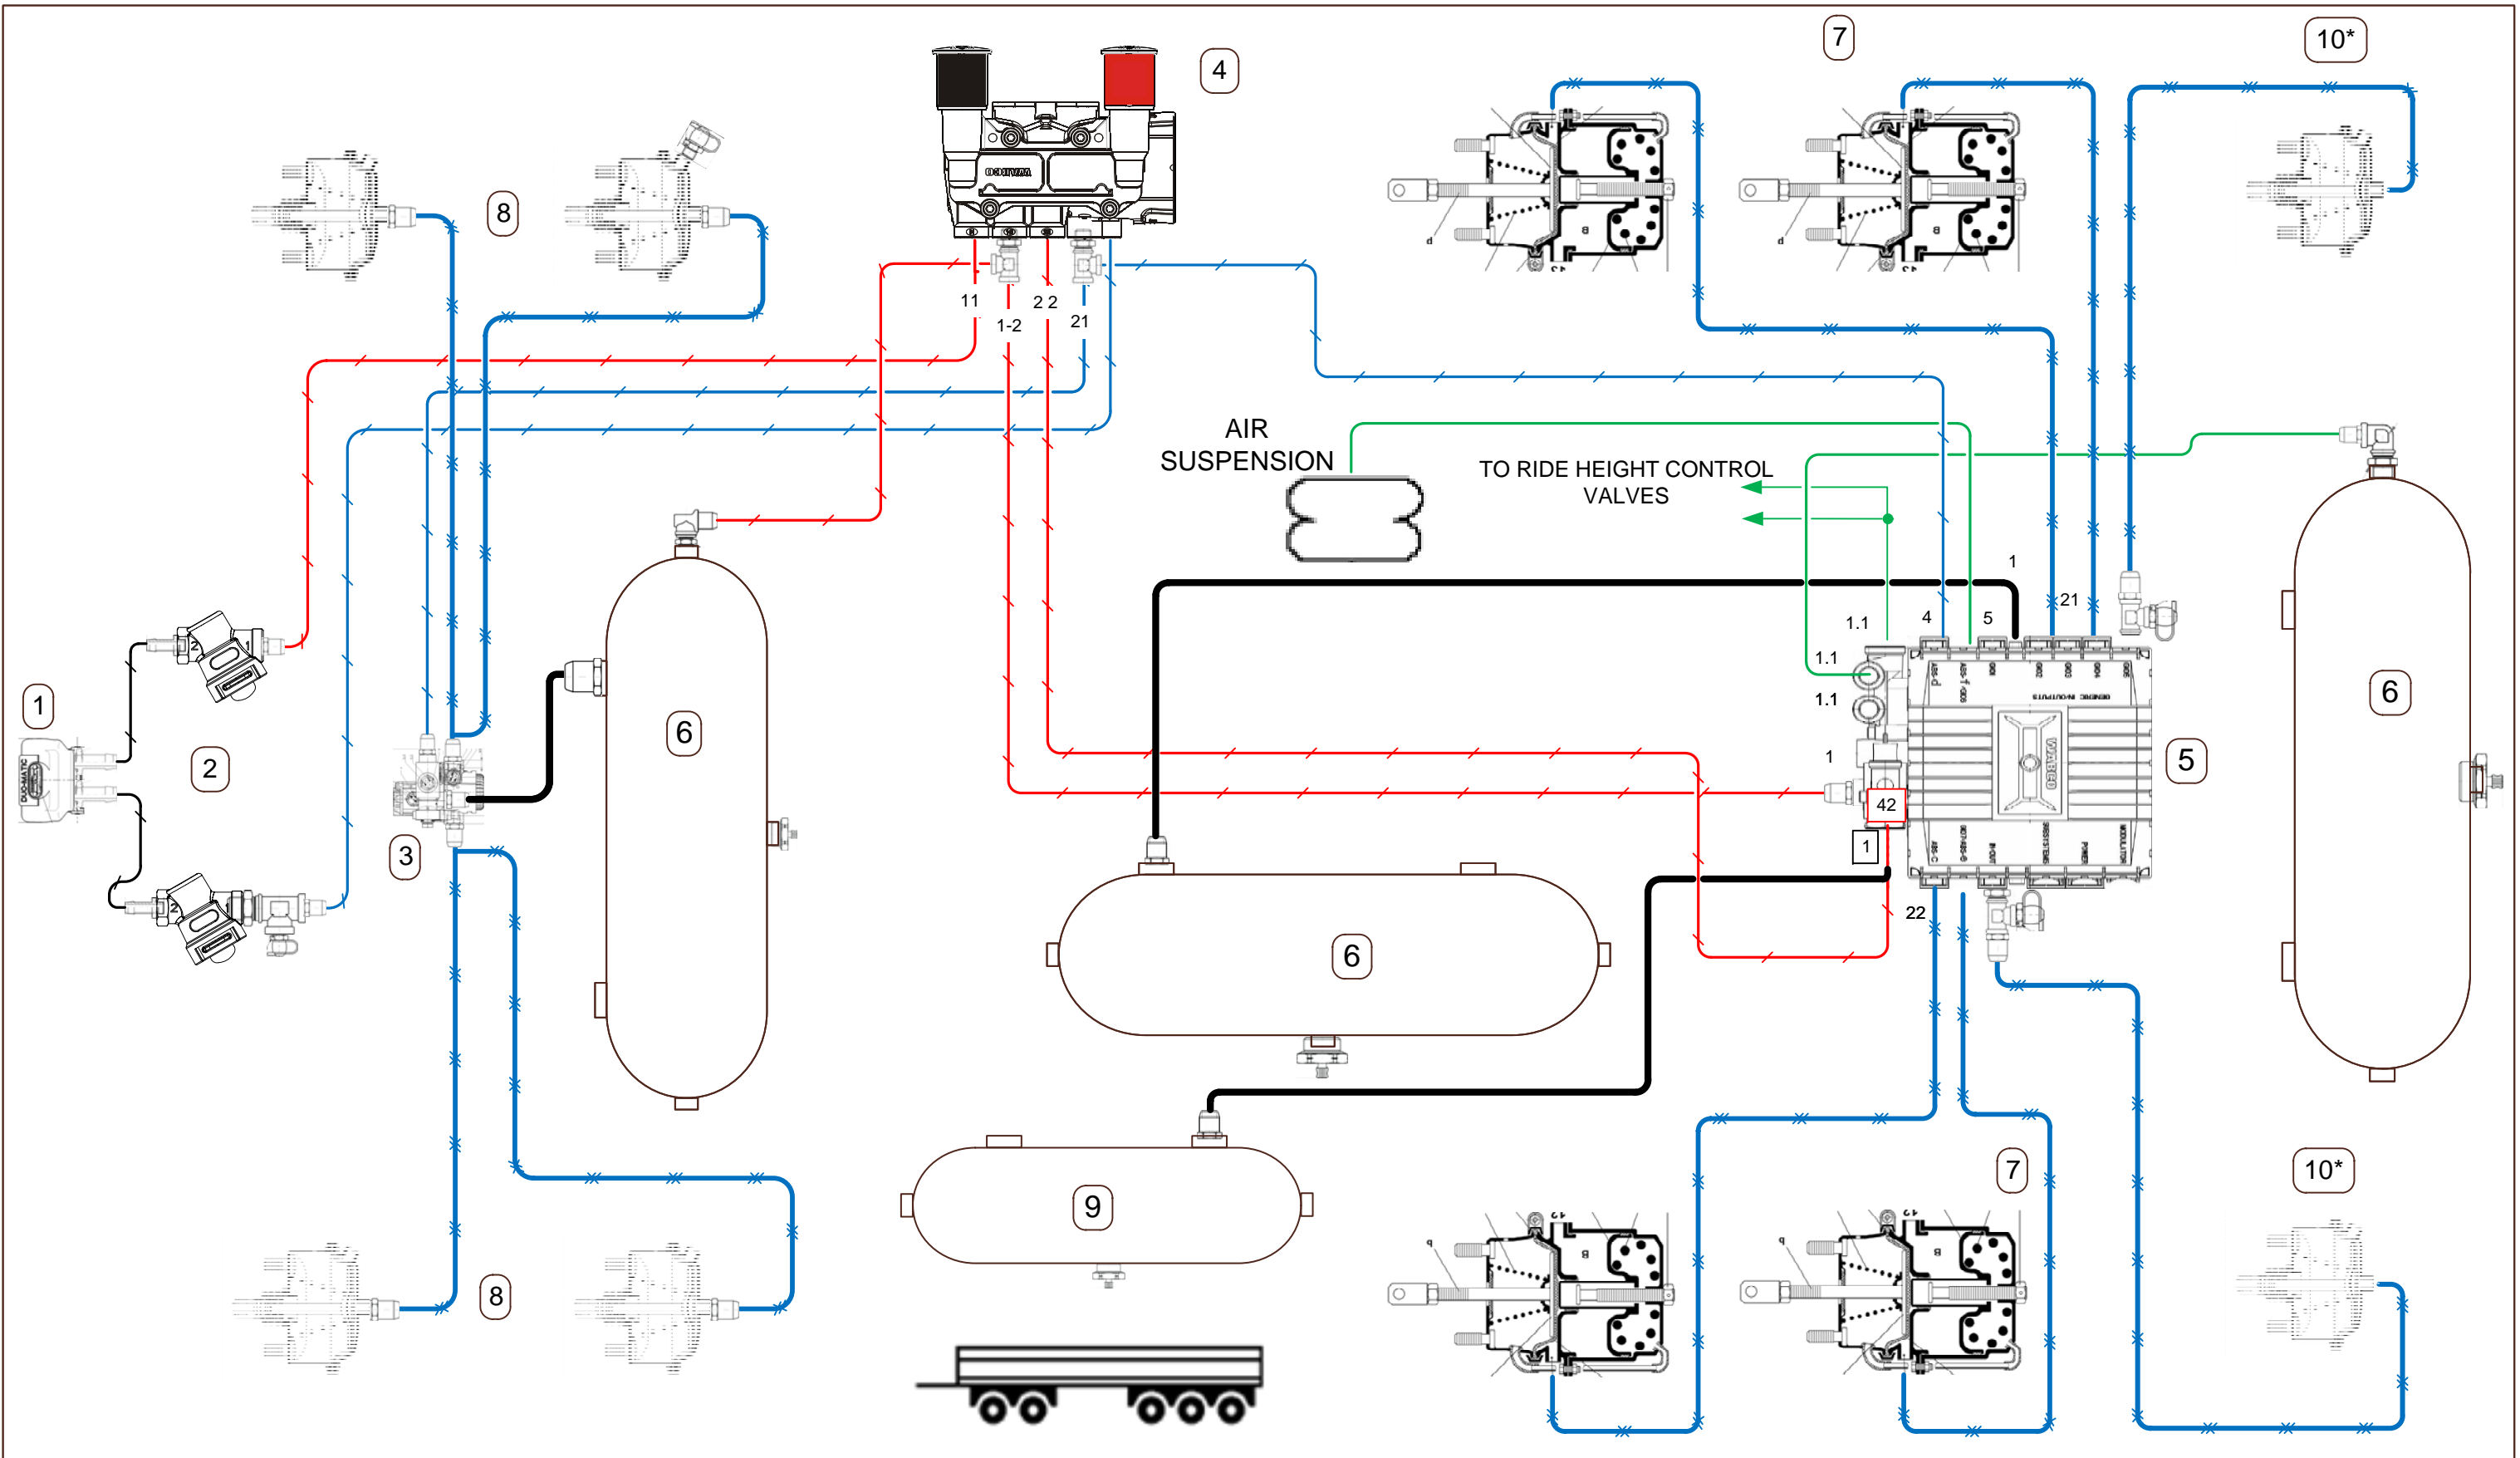

# Domett T&T


DOM5AXFULL/EBS  
7A9E20012F1023339



Copyright Transpecs 2010  
All rights reserved

SIZE	SPEC REFERENCE	MODEL NUMBER	REV
A4	1339	E2001	1
SCALE		SERVICE LINES	

ITEM	QTY.	PART NO.	DESCRIPTION	ITEM	QTY.	PART NO.	DESCRIPTION	PIPING LEGEND:
1	1	452 804 001 0	Wabco Duo-Matic coupling	9	1		25 Ltr Air Tank	3/8" Rubber
2	2	432 500 020 0	Wabco control line filter	10*	2	14HSCLD64	TSE SERVICE BRAKE CHAMBER	3/8" Rubber
3	1	480 207 202 0	Wabco EBS 3 <sup>rd</sup> modulator	11				1/2" Rubber
4	1	971 002 900 0	Wabco PREV	12				15mm Nylon
5	1	480 102 0.. 0	Wabco TEBS - E (premium)					12mm Nylon
6	3		46 Ltr Air tank					8mm Nylon
7	6	1416HTLD64	TSE Spring brake chamber					8mm Nylon
8	4	18HSCLD65	TSE Service brake chamber					8mm Nylon

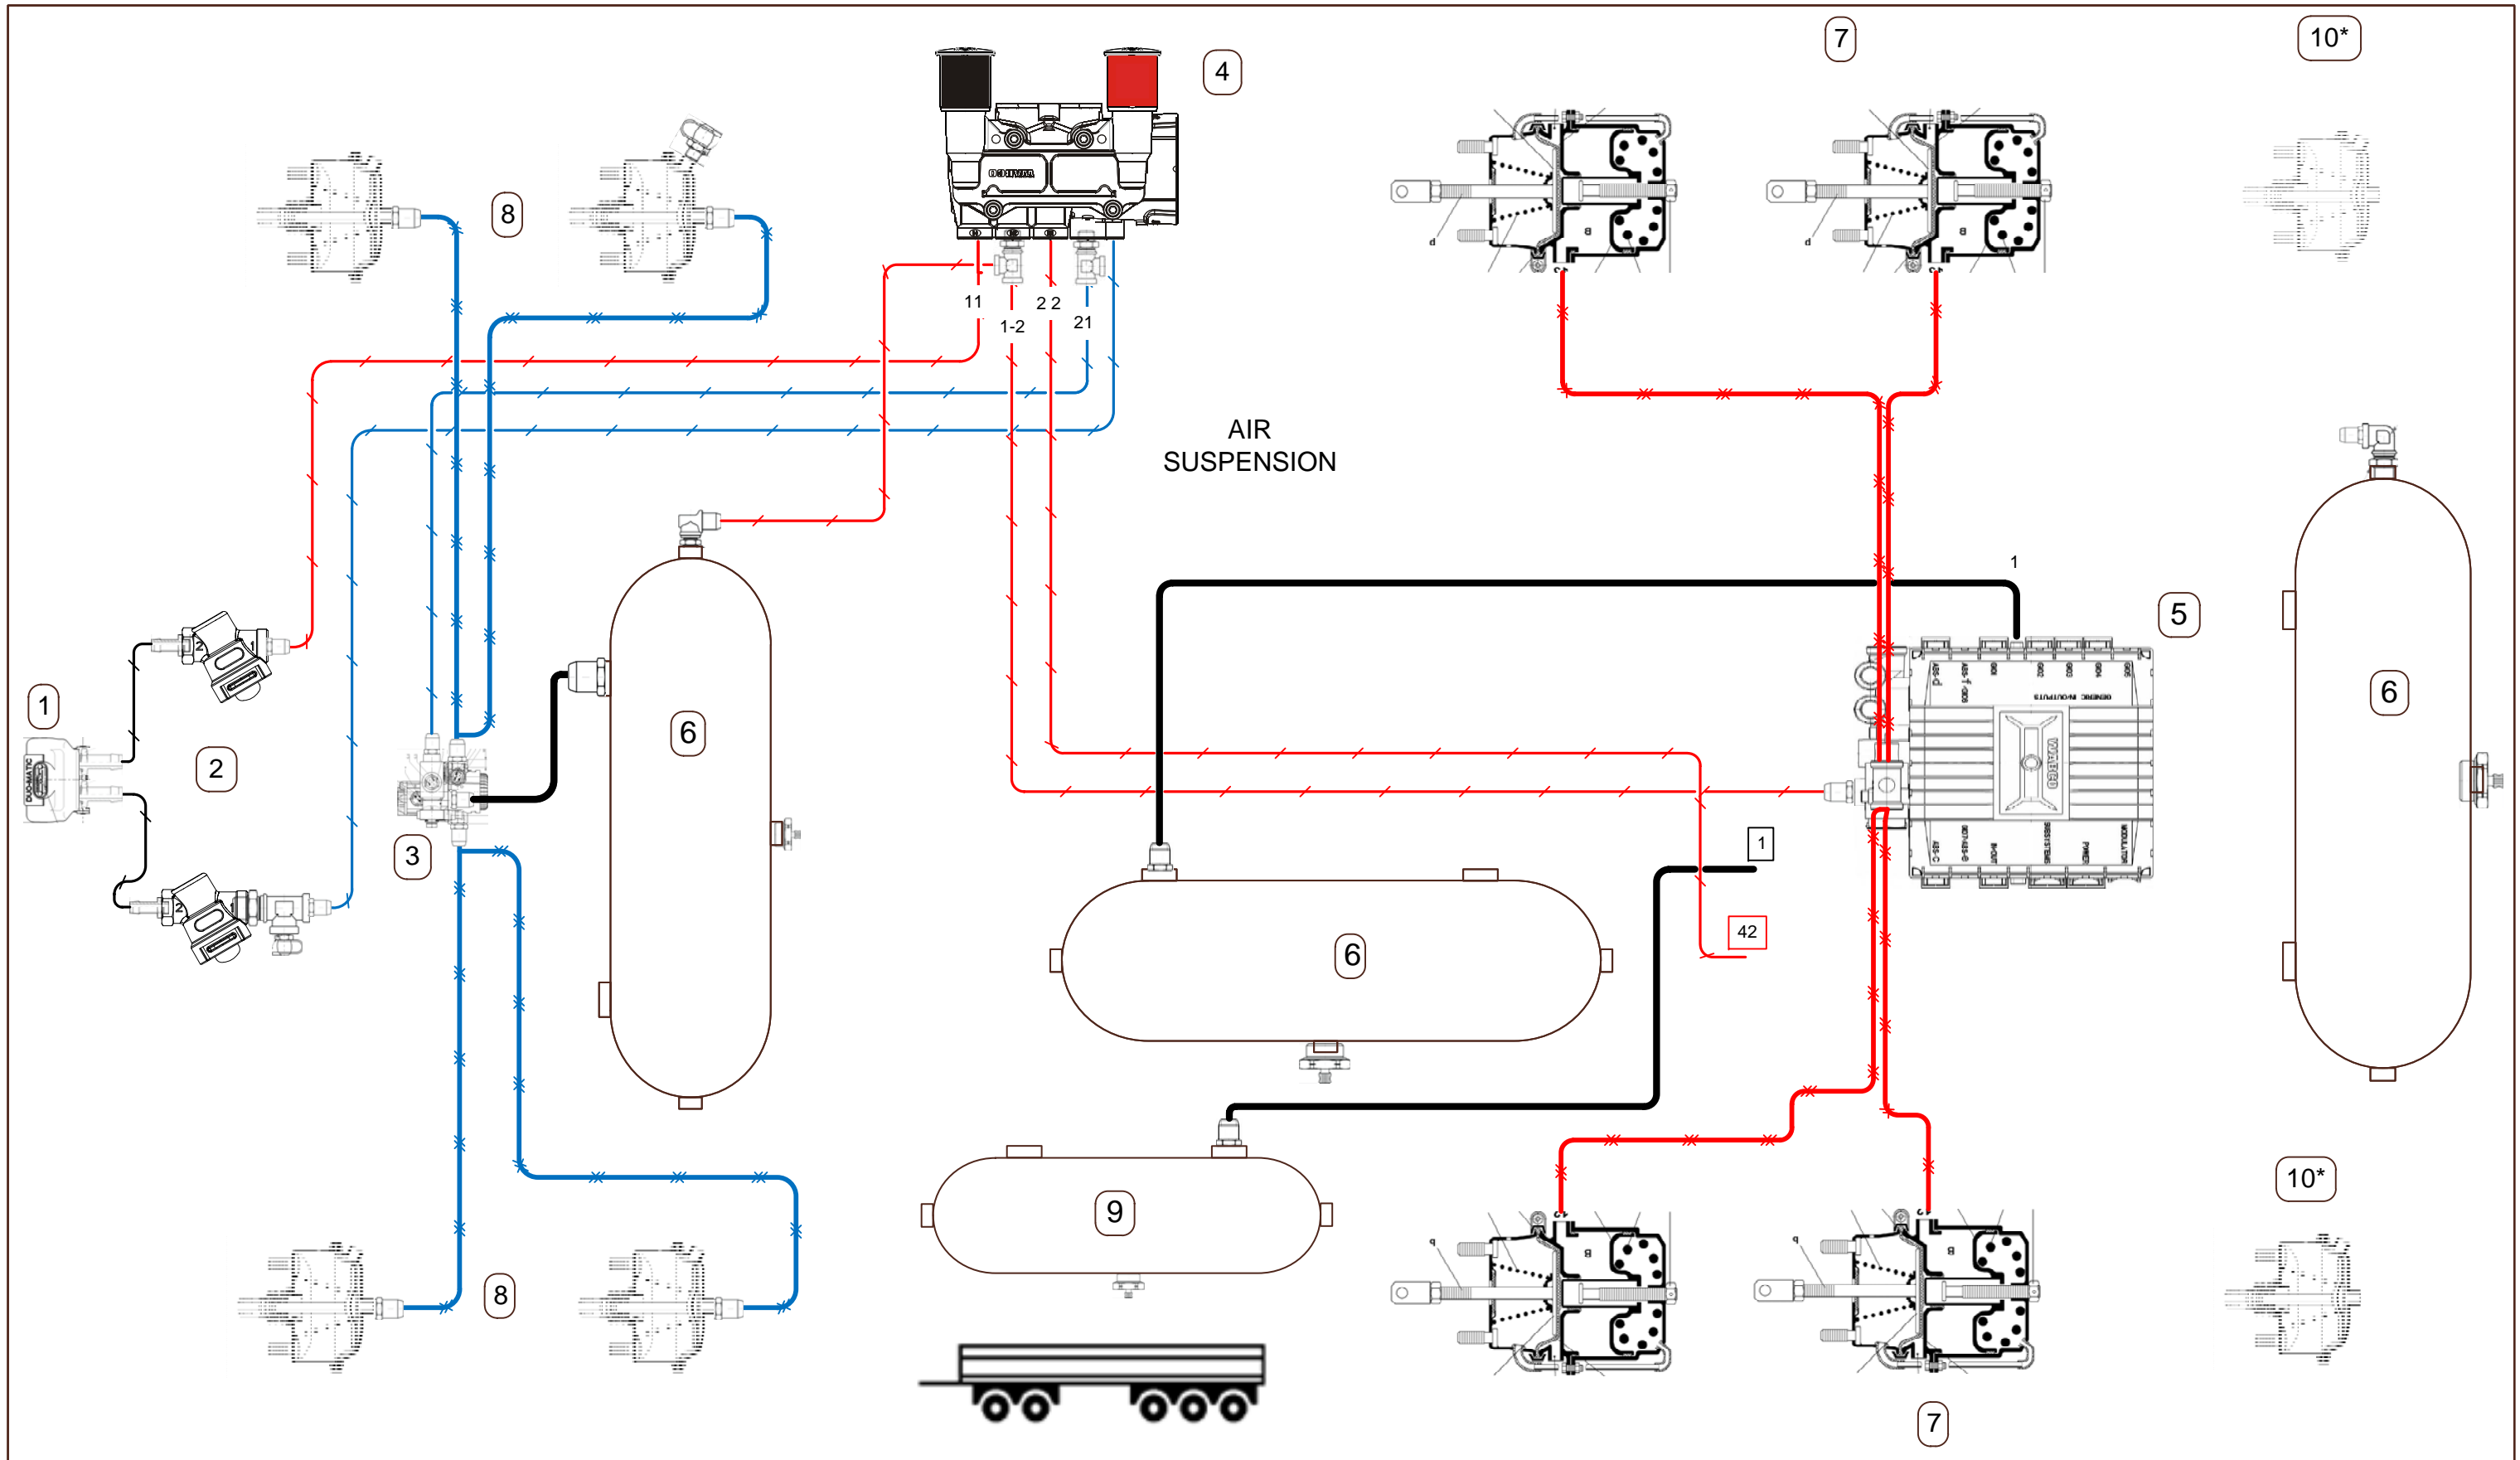

# Domett T&T

DOM5AXFULL/EBS  
7A9E20012F1023339

**GOUGH** Transpecs

**WABCO**  
Copyright Transpecs 2010  
All rights reserved

SIZE	SPEC REFERENCE	MODEL NUMBER	REV
A4	1339	E2001	1
SCALE		PARK LINES	

ITEM	QTY.	PART NO.	DESCRIPTION	ITEM	QTY.	PART NO.	DESCRIPTION
1	1	452 804 001 0	Wabco Duo-Matic coupler	9	1		25 Ltr Air Tank
2	2	432 500 020 0	Wabco control line filter	10*	2	14HSCLD64	TSE SERVICE BRAKE CHAMBER
3	1	480 207 202 0	Wabco EBS 3 <sup>rd</sup> modulator	11			
4	1	971 002 900 0	Wabco PREV	12			
5	1	480 102 0.. 0	Wabco TEBS - E (premium)				
6	3		46 Ltr Air tank				
7	6	1416HTLD64	TSE Spring brake chamber				
8	4	18HSCLD65	TSE Service brake chamber				

PIPING LEGEND:	
	3/8" Rubber
	3/8" Rubber
	1/2" Rubber
	15mm Nylon
	12mm Nylon
	8mm Nylon
	8mm Nylon
	8mm Nylon