

Heavy vehicle specialist certificate

Must be presented to a CoF (heavy) inspecting organisation

Heavy vehicle specialist inspector and inspecting organisation

Heavy vehicle specialist inspector's or manufacturing inspecting organisation's name (PRINT IN CAPS)

CHRIS CLARKE

ID

CJC

Vehicle registration (optional)

VIN/chassis number

7A9D50021H1023606

 Make **DOMETT TRAILERS**

Component being certified:

 Chassis

 Load anchorage

Model (optional)

 Log bolsters

 Towing connection

 Brakes

Certification category

HVEK
 SRT

 PSV stability

 PSV rollover

 Swept path

 PBS

Description of work

CERTIFY TO SCHEDULE 5 OF LTR 32015/4
RSS ACTIVATED & PARAMETERISED FOR TRAILERS WITH SINGLE TYRES

Code/standard/rule certified to

LTR 32015/4

Component load rating(s)

42 Tonnes GVM

General drawing number(s)

N/A
26 Tonnes Rear Group Rating

Supporting documents

BRAKE CODE CERTIFICATE JH170414
BRAKE CALCULATION # TP51543

Special conditions (optional)

**WARNING LAMP MUST ILLUMINATE WHEN IGNITION IS SWITCHED ON & THEN
EXTINGUISH IMMEDIATELY OR WHEN VEHICLE SPEED EXCEEDS 7 KPH**

Certification expiry date (if applicable)

N/A
or

Hubodometer reading (whichever comes first)

Declaration

I the undersigned, declare that I am the heavy vehicle specialist inspector identified and I hold a current valid appointment. I certify that the above mentioned vehicle component's design, manufacture and installation, and this certification complies in all respects with the Land Transport Rule: Vehicle Standards Compliance 2002 and my appointment. To the best of my knowledge the information contained in the certificate is true and correct.

Designer's ID (if different from inspector below)

Inspector's signature

Inspector's name (PRINT IN CAPS)


CHRIS CLARKE

ID number

CJC

Date

14-Nov-17

Number

611576

CoF vehicle inspector ID

CoF vehicle inspector signature

Date

All fields are mandatory unless otherwise stated.

WABCO**START-UP LOG**

System	Trailer EBS-E	WABCO part number	480 102 080 0
Production date	2017-07-07	Serial number	437003894800N
Serial number (modulator)	000000065834		
Fingerprint Customer EOL / Customer Development / Flash Program	W503643 / 2017-11-14 ; 0C000000 / 0000-00-00 ; 00000000 / 0000-00-00		

WABCO		TRAILER EBS-E			GGVS/ADR TUEH TB 2007 - 019.00 TDB0678										
HERSTELLER MANUFACTURER CONSTRUCTEUR	DOMETT TRAILERS			GIO	Pin1	Pin3	Pin4								
TYPE TYPE TYPE	4AS SKELETAL			1	24V-O1	---	---								
VEHICLE IDENT. NUMBER CHASSIS NUMBER NUMERO DE CHASSIS	7A9D50021H1023606			2	eTASC	---	eTASC								
BREMSBERECHNUNGS-NR. BRAKE CALCULATION NO. CALCUL DE FREINAGE NO.	TP51543S			3	---	RDL	SAC								
POLRADZÄHNEZAHL c-d e-f POLE WHEEL TEETH c-d e-f DENTS ROUE DENTÉE c-d e-f	90	90	ABS-System ABS-System Système ABS	4	---	---	LS1								
RSS RSS RSS	Einfachbereifung Single Tire Monte simple	X	Lenkachse Steering axle Essieu vireur	5	DIAG	DIAG	DIAG								
	Zwillingsbereifung Twin Tire Monte jumelée		Kippkritisches Fahrzeug Critical Trailer Véhicule critique	6	---	---	---								
				7	---	---	---								
Subsystems	SB	I/O	24N												
ACHSE AXLE ESSIEU	pm (bar)	6.5	pm (bar)	0.7	2.0	---	6.5	TYP TYPE	(mm)	(mm)	(mm)	(bar)			
1	1000	0.2	1.6	6500	4.0	0.3	1.5	-	5.6	-	14 / 16	64	69	415	2869
2	1000	0.2	1.6	6500	4.0	0.3	1.5	-	5.6	-	14 / 16	64	69	415	2869
3	1000	0.2	1.6	6500	4.0	0.3	1.5	-	5.6	-	14	64	69	415	2869
4	1000	0.2	1.6	6500	4.0	0.3	1.5	-	5.6	-	14	64	69	415	2869
5	0	---	---	0	---	---	---	-	---	-	---	---	---	---	---

TEBS-E

Diagnostic memory	OK	Warning lamp control	OK
Parameter setting	carried out	Stop light supply	OK
EBS pressure test	OK	Lifting axle test	Not tested
Redundancy test	OK	ECAS height sensor calibration	Not tested
ABS sensor assignment	OK	Height sensor axle load	Not tested
RTR test	Not tested	Leak test	Not tested
Immobilizer test	Not tested	Signal outputs	Not tested
Signal inputs	Not tested	Tag axle test	Not tested

Electronic Extension Module

Diagnostic memory	Not tested	Signal outputs	Not tested
TailGUARDlight	Not tested	TailGUARD	Not tested
Manufacturer	DOMETT TRAILERS	Vehicle ident. no	7A9D50021H1023606
Vehicle type	4AS SKELETAL	Odometer reading	0.0 km
next Service	0 km	Trip reading	0.0 km
Tester	Chris Clarke		
Date	2017-11-14 12:35:33 p.m.	Signature	

trailer (full, semi-, centre-axle) with air brake system acc. to UN/ECE-R.13.11

distribution: DOMETT TRAILERS
 7A9D50021H1023606
 SODC: JH170414
 LT400: CJC 611576

please note!

This brake calculation is made under consideration of
 -the legal prescriptions mentioned above in the version valid
 at the time of making the program (V6.14.04.20).
 -the functional characteristics of our products
 as well as the data of the brake out of the test
 approvals of the axle manufacturers, and
 -the other vehicle data included in the brake calculation.
 Please check whether these data correspond to the actual vehicle data.
 Our conditions of delivery apply (particularly section 9.0).
 In any case we command to do a braking harmonisation!
 WABCBrake V6.14.04.20 db 20.04.2016

vehicle manufacturer: DOMETT TRAILERS
 trailer model : 4AS SKELETAL
 trailer type : 4-axle-semi-trailer
 remarks : air / hydraulic / VA suspension
 WABCO TRAILER - EBS
 TRISTOP 1+2: T.14/24 [TSE1416HTLD64 ACTUALLY FITTED -
 SEE PAGE 7 FOR PERFORMANCE DATA]
 355/50 R 22,5

axle 1 + 2 + 3 + 4 : SAF, SBW 1937, TDB 0678 ECE,

			<u>unladen</u>		<u>laden</u>
total mass	P in kg	4500	-	5500	42000 - 42000
king-pin	PS kg	500	-	1500	16000 - 16000
axle 1	P1 in kg			1000	6500
axle 2	P2 in kg			1000	6500
axle 3	P3 in kg			1000	6500
axle 4	P4 in kg			1000	6500
total axle mass	PR in kg			4000	26000
wheel base	E in mm	9200	-	9200	
centre of gravity height	h in mm			1150	2477
K-factor	Kv min	1.9420		Kc min	1.0304
K-factor	Kv max	1.9441		Kc max	1.0304

		<u>axle 1</u>	<u>axle 2</u>	<u>axle 3</u>	<u>axle 4</u>
no. of combined axles .		1	1	1	1
no. of brake chambers per axle line	KDZ	2	2	2	2
The power output corresponds to		BZ 119.6	BZ 119.6	BZ 122.1	BZ 122.1
brake chamber manufacturer		Meritor	Meritor	Meritor	Meritor
chamber size		T.14/24	T.14/24	14.	14.
lever length	1Bh in mm	69	69	69	69
brake factor	[-]	23.03	23.03	23.03	23.03
dyn. rolling radius	rdyn min in mm	449	449	449	449
dyn. rolling radius	rdyn max in mm	449	449	449	449
threshold torque	Co Nm	6.0	6.0	6.0	6.0

calculation:

chamber pressure(rdyn min)pH at z=22,5%bar	2.2	2.2	2.2	2.2
chamber pressure(rdyn max)pH at z=22,5%bar	2.2	2.2	2.2	2.2
chamber press.(servo)pcha at pm6,5bar bar	5.6	5.6	5.6	5.6
piston force ThA at pm6,5bar N	5387	5387	5387	5387
brake force(rdyn min)T lad. at pm6,5bar N	38198	38198	38198	38198
brake force(rdyn max)T lad. at pm6,5bar N	38198	38198	38198	38198
brake force within 1 % rolling friction proportion	%	25.0	25.0	25.0

braking rate z laden	0.599	for rdyn min
z = sum (TR)/PRmax	0.599	for rdyn max

Trailer may only be operated in combination with trucks/tractors with ISO 7638 supply (5 or 7 polar).

brake diagram : 841 701 050 0

maximum pressure: 8.5 bar

axle 1:

valve 1: 971 002 ... 0 WABCO
EBS emergency valve

valve 2: 480 102 ... 0 WABCO
EBS trailer modulator

brake cylinder: Meritor 1424HTLD64

axle 2:

valve 1: 971 002 ... 0 WABCO
EBS emergency valve

valve 2: 480 102 ... 0 WABCO
EBS trailer modulator

brake cylinder: Meritor 1424HTLD64

axle 3:

valve 1: 971 002 ... 0 WABCO
EBS emergency valve

valve 2: 480 102 ... 0 WABCO
EBS trailer modulator

brake cylinder: Meritor 14HSCLD64

axle 4:


valve 1: 971 002 ... 0 WABCO
EBS emergency valve

valve 2: 480 207 0.. 0 WABCO or 480 207 2.. 0
EBS relay valve


brake cylinder: Meritor 14HSCLD64

test type III ($z_{III} = 0.30$) for rdyn min : axle1 axle2 axle3 axle4
at pm 3.6 bar => pcha in bar : 2.9 2.9 2.9 2.9
test type III ($z_{III} = 0.06$) for rdyn min : axle1 axle2 axle3 axle4
at pm 1.2 bar => pcha in bar : 0.8 0.8 0.8 0.8


brake chamber pressure laden

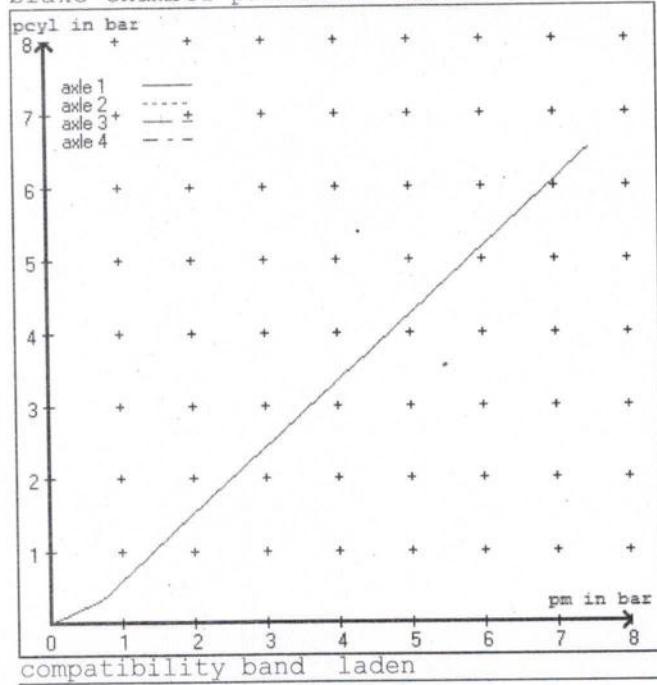


brake chamber pressure unladen

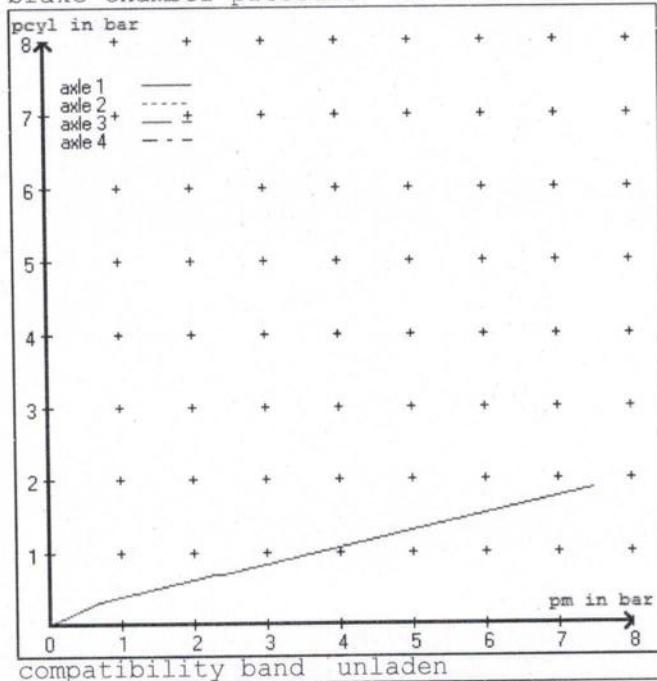

compatibility band laden

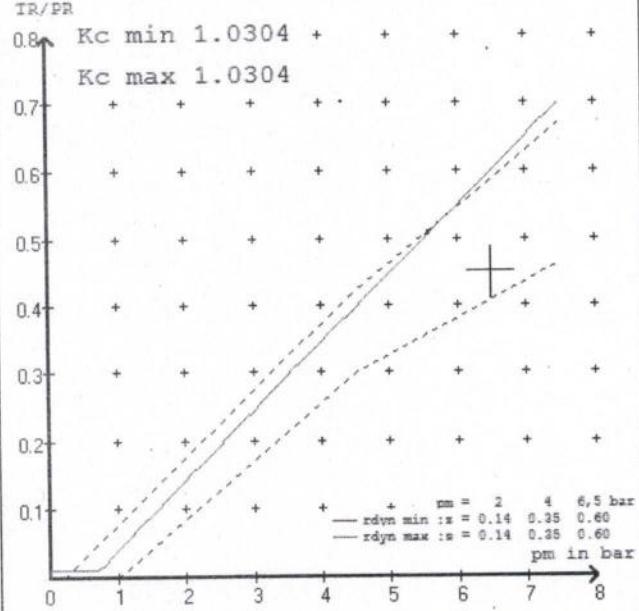

compatibility band unladen

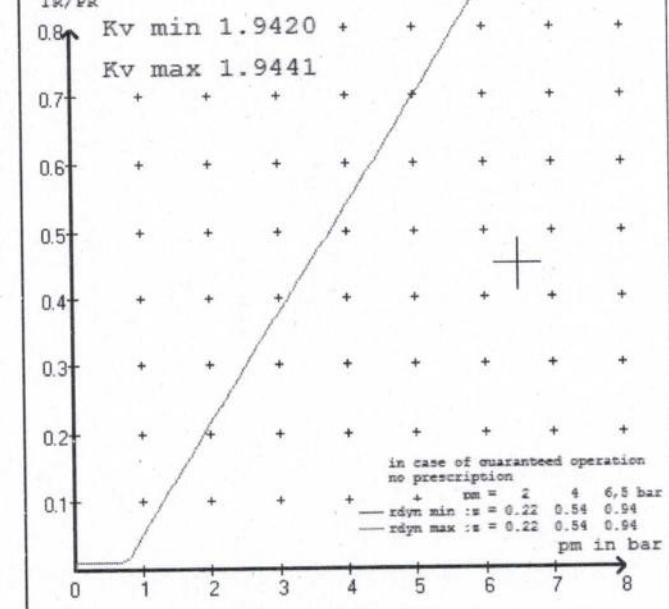

vehicle manufacturer: DOMETT TRAILERS
 trailer model : 4AS SKELETAL
 trailer type : 4-axle-semi-trailer

brake chamber and lever length :

axle 1 :	2 x type/diameter T.14/24 (Meritor)	lever length 69 mm
axle 2 :	2 x type/diameter T.14/24 (Meritor)	lever length 69 mm
axle 3 :	2 x type/diameter 14. (Meritor)	lever length 69 mm
axle 4 :	2 x type/diameter 14. (Meritor)	lever length 69 mm

brake diagram : 841 701 050 0

valve :

971 002 ... 0	WABCO EBS emergency valve
480 102 ... 0	WABCO EBS trailer modulator
480 207 0.. 0	WABCO EBS relay valve or 480 207 2.. 0

EBS input data

=====

vehicle manufacturer:	DOMETT TRAILERS
trailer model :	4AS SKELETAL
trailer type :	4-axle-semi-trailer
brake calculation no.	: TP 51543S

tire circumference main axle	:	2825 for rdyn max
tire circumference auxiliary axle	:	2825 for rdyn max

assignment pm / deceleration z: pm 0.7 bar z = 0.010 (laden condition)	
	2.0 bar z = 0.142
	6.5 bar z = 0.600

control pressure pm			6,5	control pressure pm			0.7	2.0	6.5
axle	axle load unladen	bellow pr. unladen	brake pr. unladen	axle load laden	bellow pr. laden	brake pr. laden			
1	1000	to be entered by the vehicle manufact.	1.6	6500	to be entered by the vehicle manufact.	0.3	1.5	5.6	
2	1000		1.6	6500		0.3	1.5	5.6	
3	1000		1.6	6500		0.3	1.5	5.6	
4	1000		1.6	6500		0.3	1.5	5.6	
5	0		0,0	0		0,0	0,0	0,0	

The unladen values indicated in the above table are values for the basic parameter set. Higher unladen axle loads and liftaxles are automatically recognized and do not require separate adjustment. The above unladen axle loads must not be fallen below.

axle 1	axle 2	axle 3	axle 4
axle load pcyl	axle load pcyl	axle load pcyl	axle load pcyl
1000	1.6	1000	1.6
1500	2.0	1500	2.0
2000	2.3	2000	2.3
2500	2.7	2500	2.7
3000	3.1	3000	3.1
3500	3.4	3500	3.4
4000	3.8	4000	3.8
4500	4.1	4500	4.1
6500	5.6	6500	5.6

data sheet to ECE vehicle type-approval certificate concerning braking equipment: according to ECE R13 annex 11

axle 1 : reference axle: SAF	SBW 1937	brake lining: Jurid 539
test report :	TDB 0678 ECE	date : 20130927 27.09.2013
axle 2 : reference axle: SAF	SBW 1937	brake lining: Jurid 539
test report :	TDB 0678 ECE	date : 20130927 27.09.2013
axle 3 : reference axle: SAF	SBW 1937	brake lining: Jurid 539
test report :	TDB 0678 ECE	date : 20130927 27.09.2013
axle 4 : reference axle: SAF	SBW 1937	brake lining: Jurid 539
test report :	TDB 0678 ECE	date : 20130927 27.09.2013

calc. verif. of residual (hot) braking force type III

(item 4.2.1 of appendix 2 to annex 11)

axle 1	(rdyn 449 mm)	T = 19.1 % Fe
axle 2	(rdyn 449 mm)	T = 19.1 % Fe
axle 3	(rdyn 449 mm)	T = 19.1 % Fe
axle 4	(rdyn 449 mm)	T = 19.1 % Fe

calculated actuator stroke in mm

(item 4.3.1.1 of appendix 2 to annex 11)

axle 1	(sp = 56 mm)	s = 48 mm
axle 2	(sp = 56 mm)	s = 48 mm
axle 3	(sp = 56 mm)	s = 48 mm
axle 4	(sp = 56 mm)	s = 48 mm

average thrust output in N at pm = 6,5 bar (however max. pcha = 7,0 bar)

axle1	ThA = 5387 N
axle2	ThA = 5387 N
axle3	ThA = 5387 N
axle4	ThA = 5387 N

calc. residual (hot) braking force in N

(item 4.3.1.4 of appendix 2 to annex 11)

axle 1	(rdyn 449 mm)	T = 31242 N
axle 2	(rdyn 449 mm)	T = 31242 N
axle 3	(rdyn 449 mm)	T = 31242 N
axle 4	(rdyn 449 mm)	T = 31242 N

basic test type III
of subject (calculated)
trailer (E) residual
 (hot)braking

braking rate of the vehicle (item 4.3.2 to appendix 2 to annex 11)	0.60	0.49
---	------	------

required braking rate (items 1.5.3 and 1.7.2 to annex 11)	>= 0,4 and >= 0,6*E (0.36)
--	-------------------------------

axle 1	(rdyn 449 mm)	T = 31242 N
axle 2	(rdyn 449 mm)	T = 31242 N
axle 3	(rdyn 449 mm)	T = 31242 N
axle 4	(rdyn 449 mm)	T = 31242 N

basic test type III
of subject (calculated)
trailer (E) residual
 (hot)braking

braking rate of the vehicle (item 4.3.2 to appendix 2 to annex 11)	0.60	0.49
---	------	------

required braking rate (items 1.5.3 and 1.7.2 to annex 11)	>= 0,4 and >= 0,6*E (0.36)
--	-------------------------------

spring parking brake

		axle 1	axle 2
no of TRISTOP-actuators per axle line KDZ		2	2
TRISTOP-actuator type		T.14/16	T.14/16
lever length	lBh in mm	69	69
stat. tyre radius	rstat max in mm	432	432
at a stroke of	s in mm	30	30
min. force of spring brake	TFZ in N	6200	6200
sp.brake chamber no Meritor.....		4	4
release pressure	pLs in bar	4.5	4.5

calculation:

ratio until road		3.6827	3.6827
iFb = lBh*Eta*C*rBt/(rBn*rstat)			
for rstat in mm		432	432
brake force of spring br. Tf in N		44730	44730
Tf = (TFZ*KDZ-2*Co/lBh)*iFb			
braking rate	zf laden	0.361	
zf = sum (Tf)/P + 0,01			

Test of the frictional connection required by the parking brake

minimum wheelbase/minimum supporting width min Ef necessary
to fulfil the regulations

$$\text{min Ef} = E * (1 - PR/P + zferf * h/E) / (1 - zferf / (fzul * nf/ng))$$

$$\text{min Ef} = 7183 \text{ mm} \quad \text{for } E = 9200 \text{ mm}$$

$$\text{min Ef} = 7183 \text{ mm} \quad \text{for } E = 9200 \text{ mm}$$

min Ef =	minimum distance between front axle(s) (trailer) or support (semitrailer)
and the rear axle(s) (resultant of the bogie)	
E =	wheel base
fzul = 0.80	maximum permissible frictional connection required
zferf = 0.18	maximum required braking ratio of the parking brake
h = 2477 mm	height of center of gravity - laden
PR = 26000 kg	maximum bogie mass - laden
P = 42000 kg	maximum total mass - laden
nf = 2	no. of axle(s) with TRISTOP spring brake actuators
ng = 4	no. of bogie axle(s)


reference values

reference values for z = 45% for max rdyn: 449 mm

	pz [bar]	T [N]	T [N]
axle 1	1.0 5.6	4158 28697	
axle 2	1.0 5.6	4158 28697	
axle 3	1.0 5.6	4158 28697	
axle 4	1.0 5.6		4158 28697

VIN - no.:

	Axe(s) / Achse(n)				
brake cylinder type (service / parking) Bremszylinder Typ (Betrieb / Fest)	T.14/24	T.14/24	14./	14./	/
Maximum stroke smax = ...mm maximaler Hub smax =mm	64	64	64	64	
Lever length =mm Hebellänge =mm	69.08	69.08	69.08	69.08	

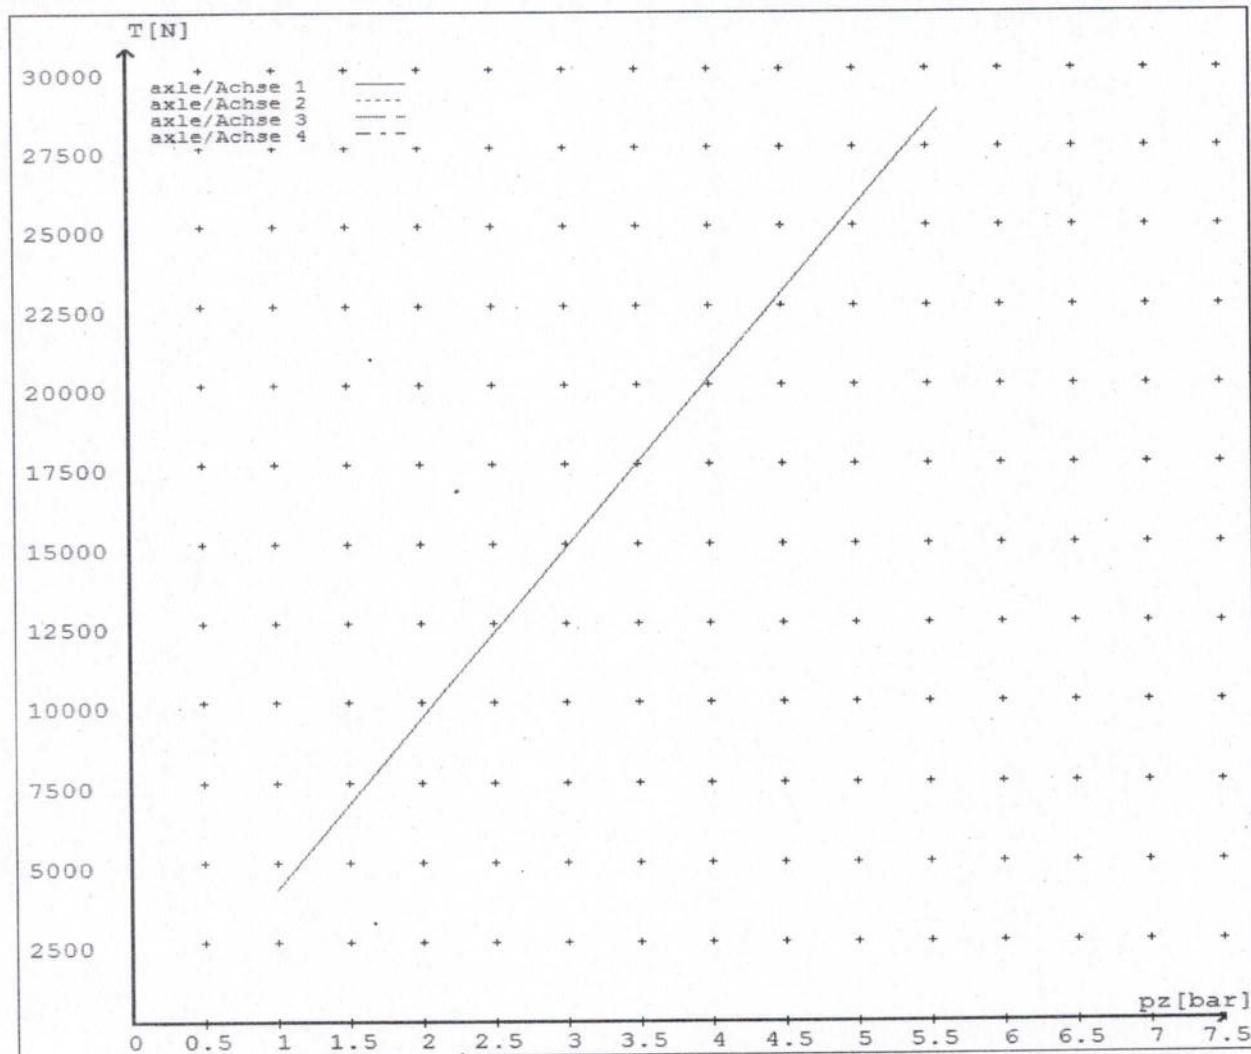

NOTICE TO VEHICLE OPERATOR

THIS VEHICLE HAS A BRAKE SYSTEM WHICH HAS BEEN DESIGNED AND FITTED IN ACCORDANCE WITH THE LAND TRANSPORT HEAVY VEHICLE BRAKE RULE 32015/4.

IF THIS VEHICLE IS OPERATED IN CONJUNCTION WITH NON-CERTIFIED VEHICLES, THERE MAY BE OPERATIONAL FACTORS WHICH NEED TO BE TAKEN INTO CONSIDERATION.

PLEASE REFER TO THE CERTIFIER FOR FURTHER INFORMATION.

EXCERPT FROM LAND TRANSPORT RULE; HEAVY-VEHICLE BRAKES RULE 32015/4. SECTION 10,

10.1 RESPONSIBILITIES OF OPERATORS

A person who operates a vehicle must ensure that the vehicle complies with this rule.

10.2 RESPONSIBILITIES OF REPAIRERS

A person who repairs or adjusts a brake must ensure that the repair or adjustment:

- a) does not prevent the vehicle from complying with this rule;
- b) complies with Land Transport Rule: Vehicle Repair 1998.

10.3 RESPONSIBILITIES OF MODIFIERS

A person who modifies a vehicle so as to affect the braking performance of the vehicle must:

- a) ensure that the modification does not prevent the vehicle from complying with this Rule; and
- b) notify the operator that the vehicle must be inspected and, if necessary, certified by a person or organisation appointed to carry out specialist inspection and certification of heavy vehicle brakes.

IF YOU ARE UNSURE ABOUT YOUR RESPONSIBILITIES, PLEASE CONTACT THE VEHICLE MANUFACTURER, OR MYSELF.

COMPLAINTS. Complaints and Warranty issues which relate to Brake Certification will be acknowledged within 7 working days and a resolution proposed within 25 working days. Resolution of complaints and Warranty issues is subject to Transpecs Warranty policy. Customers have the right to appeal to the New Zealand Transport Authority if dissatisfied with a Compliance issue. (Refer NZTA Deed Of Appointment Para 47.4) NZTA Helpdesk 0800 699 000

(p.p.).....
(J.Hirst (JEH) HVEK)

NOTICE TO VEHICLE OPERATOR

This trailer is equipped with an **Electronic Brake System**.

To comply with the New Zealand Heavy Vehicle Brake Rule 32015/4, it must be used only in conjunction with a truck/tractor equipped with a 5 or 7 pin ABS/EBS power supply socket.


Failure to connect to such supply invalidates Brake Rule compliance.

The trailer ABS/EBS warning light on the towing vehicle dashboard must illuminate when the ignition is switched on and extinguish when the vehicle is in motion.

If the light does not illuminate when ignition is switched on, the system must be checked. If the light remains illuminated when the vehicle is in motion, Brake Rule compliance is compromised. Repairs must be made as soon as possible.

If you are unsure of your responsibilities and/or obligations, please contact either the vehicle manufacturer or myself.

(p.p.)
JE Hirst
(JEH HVEK)
(09 980 7300)

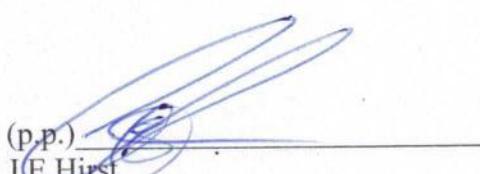

NOTICE TO VEHICLE OPERATOR

WABCO Park Release Emergency Valve (PREV)


**This trailer is equipped with a WABCO PREV
Part # 971 002 900 0**

Application of the park brake via the cab control valve will actuate and apply all service brakes on the trailer. In the event of a leak in the service brake system the Spring Brakes will automatically override and hold the vehicle in compliance to Land Transport Rule: Heavy-vehicle Brakes Rule 32015/4.

When the vehicle is presented for COF the trailer park brake system is tested by pulling the red actuation knob on the PREV, situated mid way down the chassis rail. The cab control in the prime mover does not have to be applied for this test procedure.

If you are unsure of any aspect relating to this instruction please contact either the vehicle manufacturer or myself.

(p.p.)
JE Hirst
(JEH HVEK)
(09 980 7300)

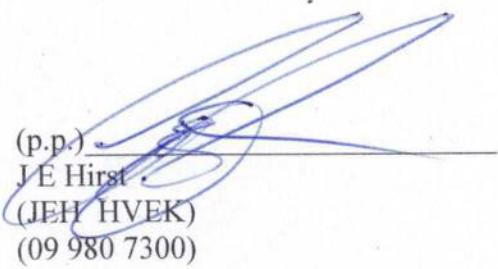



HEAVY VEHICLE BRAKE RULE
32015/4 WORKSHEET
(PROCEDURE DOCUMENTATION SHEET-PDS)
&
CONFIRMATION OF COMPLIANCE

CERTIFICATE NO.

JH170414

CUSTOMER NAME

DOMETT TRAILERS LTD

CUSTOMER ORDER NO.:

4799

DATE RECEIVED 14-Nov-17

VEHICLE TYPE

SKELETAL

VIN/ CHASSIS NO.

7A9D50021H1023606

BRIEF SPECIFICATION AS CERTIFIED TO SCHEDULE 5

BRAKE VALVES	MAKE	TYPE
PRIMARY RELAY	WABCO	480 102 080 0
SECONDARY RELAY	WABCO	480 207 202 0
YARD RELEASE VALVE	WABCO	971 002 900 0
PARK BRAKE VALVE	WABCO	971 002 900 0
SUSP. VALVES [WABCO]	FRONT	REAR
CONTROL	N/A	463 090 500 0
HEIGHT SENSOR	N/A	441 050 100 0

OTHER VALVES:

MAKE:	WABCO	TYPE:	472 102 040 0	SETTING:	REV. LOCK
MAKE:		TYPE:		SETTING:	
MAKE:		TYPE:		SETTING:	
MAKE:		TYPE:		SETTING:	

<u>BRAKE CHAMBERS:</u>	<u>AXLE 1 & 2</u>	<u>AXLE 3</u>	<u>AXLE 4</u>
MAKE	TSE	TSE	TSE
SIZE	1416HTLD64	14HSCLD64	14HSCLD64
MAX STROKE (mm)	64	64	64
SLACK LENGTH (mm)	69	69	69
 DRUM TYPE:	N/A	N/A OR	N/A
 BRAKE CALIPER:	SBW1937	SBW1937	SBW1937
 FRICITION MATERIAL:	<input checked="" type="checkbox"/> OEM	<input type="checkbox"/> AFTERMARKET	
<u>LINING BRAND</u>	<u>AXLE 1 & 2</u>	<u>AXLE 3</u>	<u>AXLE 4</u>
	JURID 539	JURID 539	JURID 539
 OTHERS:			
TYRES:	FRONT N/A	REAR 355 50 R 22.5	
 BRAKE CALCULATION #:	TP51543		

COMMENTS:

EBS, SPECIAL CONDITIONS APPLY. SEE INSTRUCTIONS ON LT400 #

SALES ORDER #: S0780357 **PROCESS TIME:** 1 HOUR

TRAILERS EQUIPPED WITH PREV: THE PARK BRAKE PERFORMANCE **MUST BE**

MEASURED BY PULLING THE RED ACTUATION KNOB ON THE PREV VALVE WHEN

THE AXLES - EQUIPPED WITH SPRING BRAKES - ARE IN THE BRAKE ROLLERS. THE

PARK BRAKE IN THE CAB **MUST NOT BE APPLIED.**

NOTES:

CHAMBERS & PARK BRAKE PERFORMANCE:

BRAKE CALCULATION TP51543 USES THE TSE1424HTLD TO DETERMINE THE SERVICE BRAKE PERFORMANCE & THE TSE1616HTLD64 TO MEASURE THE PARK BRAKE PERFORMANCE OF AXLES 1 & 2. THE ACTUAL CHAMBER USED (TSE1416HTLD64) IS NOT AVAILABLE IN THE WABCO BRAKE CALCULATOR.


PARK BRAKE (z) = .361 @

CONFORMATION OF COMPLIANCE

I CONFIRM THAT THE VEHICLE IDENTIFIED IN PAGES 1 AND 2 OF THIS CONFORMATION OF COMPLIANCE COMPLIES WITH ALL RELEVANT REQUIREMENTS OF THE CURRENT NEW ZEALAND HEAVY VEHICLE BRAKE RULE 32015/4, SCHEDULE 5.

DATE: 14-Nov-17

SIGNED: (pp)

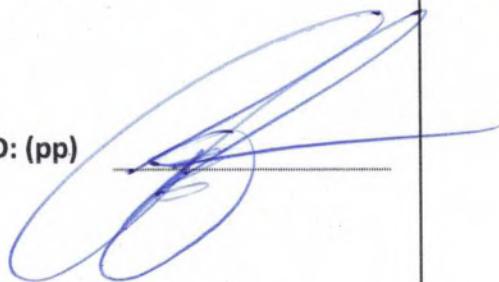

NAME & ID: J HIRST (JEH)

PHONE (BUS): 09 980 7300 FAX (BUS) 09 980 7306

POSTAL ADDRESS: TRANSPORT SPECIALTIES LTD
PO BOX 98-971,
MANUKAU CITY,
MANUKAU 2241

POSITION: BRAKE CERTIFIER HVEK

I CONFIRM THE BRAKE SYSTEM OF THE VEHICLE IDENTIFIED IN PAGE 1 OF THIS STATEMENT OF COMPLIANCE AS MODIFIED BY MYSELF, CONTINUES TO COMPLY WITH ALL THE RELIVANT REQUIREMENTS OF THE CURRENT NEW ZEALAND HEAVY BRAKE RULE 32015/4 SCHEDULE 5.

DATE: SIGNED:

NAME:

CERTIFIERS ID: POSITION:

PHONE (BUS): FAX (BUS):

COMMENTS:
