

# Heavy vehicle specialist certificate

Must be presented to a CoF (heavy) inspecting organisation  
 Heavy vehicle specialist inspector and inspecting organisation

Heavy vehicle specialist inspector's or manufacturing inspecting organisation's name (PRINT IN CAPS) **CHRIS CLARKE** ID **CJC**

Vehicle registration (optional) \_\_\_\_\_ VIN/chassis number **7 A 9 E 2 5 0 1 6 H 1 0 2 3 6 6 6**

Make **DOMETT TRAILERS** Component being certified:  Chassis  Load anchorage

Model (optional) \_\_\_\_\_  Log bolsters  Towing connection  Brakes

Certification category **HVEK**  SRT  PSV stability  PSV rollover

Swept path  PBS

Description of work

**CERTIFY TO SCHEDULE 5 OF LTR 32015/4**

**RSS ON: TWIN TYRES / SUPER-SINGLES      SIZE = 265 70 R 19.5**

Code/standard/rule certified to **LTR 32015/4** Component load rating(s) **32 Tonnes GVM**

General drawing number(s) **N/A** **(35 Tonnes (Group ratings))**

Supporting documents

**BRAKE CODE CERTIFICATE    JH171114**

**BRAKE CALCULATION #      TP51633**

Special conditions (optional)


**WARNING LAMP MUST ILLUMINATE WHEN IGNITION IS SWITCHED ON & THEN EXTINGUISH IMMEDIATELY OR WHEN VEHICLE SPEED EXCEEDS 7 KPH**

Certification expiry date (if applicable) **N/A [UNLESS MODIFIED]** or Hubodometer reading (whichever comes first) \_\_\_\_\_

**Declaration**

I the undersigned, declare that I am the heavy vehicle specialist inspector identified and I hold a current valid appointment. I certify that the above mentioned vehicle component's design, manufacture and installation, and this certification complies in all respects with the Land Transport Rule: Vehicle Standards Compliance 2002 and my appointment. To the best of my knowledge the information contained in the certificate is true and correct.

Designer's ID (if different from inspector below) \_\_\_\_\_

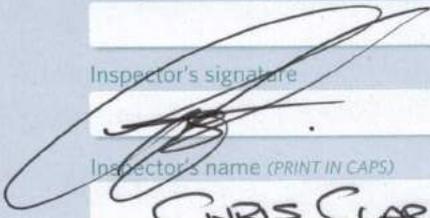Inspector's signature 

Inspector's name (PRINT IN CAPS) **CHRIS CLARKE** ID number **CJC**

Date **20-Nov-17** Number **611582**

CoF vehicle inspector ID \_\_\_\_\_ CoF vehicle inspector signature \_\_\_\_\_ Date \_\_\_\_\_

All fields are mandatory unless otherwise stated.

# WABCO START-UP LOG

System	Trailer EBS-E	WABCO part number	480 102 080 0
Production date	2016-08-11	Serial number	437002619200B
Serial number (modulator)	000000057702		
Fingerprint Customer EOL / Customer Development / Flash Program	W503643 / 2017-11-20 ; 00000000 / 0000-00-00 ; 00000000 / 0000-00-00		

## WABCO TRAILER EBS-E

GGVS/ADR TUEH TB 2007 - 019.00  
TDB0749

HERSTELLER MANUFACTURER CONSTRUCTEUR	DOMETT TRAILERS			GIO	Pin1	Pin3	Pin4
TYP TYPE TYPE	5AFT STOCK TRAILER			1	24V-O1	---	---
VEHICLE IDENT. NUMBER CHASSIS NUMBER NUMERO DE CHASSIS	7A9E25016H1023666			2	---	---	---
BREMSBERECHNUNGS-NR. BRAKE CALCULATION NO. CALCUL DE FREINAGE NO.	TP51633A			3	ALS2	ALS2	---
POLRADZÄHNEZAHL c-d / e-f POLE WHEEL TEETH c-d / e-f DENTS ROUE DENTÉE c-d / e-f	90	90	ABS-System ABS-System Système ABS	4	---	---	---
RSS RSS RSS	Einfachbereifung Single Tire Monte simple		Lenkachse Steering axle Essieu vireur	5	DIAG	DIAG	DIAG
	Zwillingsbereifung Twin Tire Monte jumetée	X	Kipkritisches Fahrzeug Critical Trailer Vehicule critique	6	---	---	---
Subsystems	SB	I/O	24N	7	---	---	---

ACHSE AXLE ESSEU	pm (bar)		6.5		pm (bar)		0.8		2.0		---		6.5		TYP TYPE		(mm)		(mm)		(bar)		
	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	
1	2500	1.3	2.4	8000	5.1	0.4	1.4	---	6.2	-	20	65	69	509	4564								
2	2500	1.3	2.4	8000	5.1	0.4	1.4	---	6.2	-	20	65	69	509	4564								
3	1900	0.9	1.7	6400	4.0	0.3	1.4	---	4.5	-	14 / 16	64	69	490	2709								
4	1900	0.9	1.7	6400	4.0	0.3	1.4	---	4.5	-	14 / 16	64	69	490	2709								
5	1900	0.9	1.7	6400	4.0	0.3	1.4	---	4.5	-	14	64	69	490	2709								


### TEBS-E

Diagnostic memory	OK	Warning lamp control	OK
Parameter setting	carried out	Stop light supply	OK
EBS pressure test	OK	Lifting axle test	Not tested
Redundancy test	OK	ECAS height sensor calibration	Not tested
ABS sensor assignment	OK	Height sensor axle load	Not tested
RTR test	Not tested	Leak test	Not tested
Immobilizer test	Not tested	Signal outputs	Not tested
Signal inputs	Not tested	Tag axle test	Not tested

### Electronic Extension Module

Diagnostic memory	Not tested	Signal outputs	Not tested
TailGUARDlight	Not tested	TailGUARD	Not tested

Manufacturer	DOMETT TRAILERS	Vehicle ident. no	7A9E25016H1023666
Vehicle type	5AFT STOCK TRAILER	Odometer reading	0.0 km
next Service	0 km	Trip reading	0.0 km

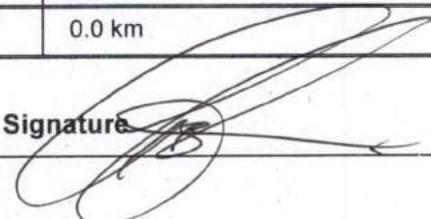Tester	Chris Clarke	Signature 
Date	2017-11-20 10:09:58 a.m.	

trailer (full, semi-, centre-axle) with air brake system acc. to UN/ECE-R.13.11

distribution: DOMETT TRAILERS  
 7A9E25016H1023666  
 SODC: JH171114  
 LT400: CJC 611582

please note!

This brake calculation is made under consideration of  
 -the legal precriptions mentioned above in the version valid at the time of making the program (V6.14.04.20).  
 -the functional characteristics of our products as well as the data of the brake out of the test approvals of the axle manufacturers, and  
 -the other vehicle data included in the brake calculation.  
 Please check whether these data correspond to the actual vehicle data. Our conditions of delivery apply (particularly section 9.0). In any case we commend to do a braking harmonisation!  
 WABCOBrake V6.14.04.20 db 20.04.2016

vehicle manufacturer: DOMETT TRAILERS  
 trailer model : 5AFT STOCK TRAILER  
 trailer type : 5-axle-full-trailer  
 remarks : air / hydraulic / VA suspension  
 WABCO TRAILER - EBS  
 TRISTOP 3+4: T.14/24 [TSE1416HTLD64 ACTUALLY USED - SEE PAGE 7 FOR PERFORMANCE DATA]  
 265/70 R 19,5

axle 1 + 2 + 3 + 4 + 5 : SAF, SBW 1937, TDB 0749 ECE,

		unladen	laden
total mass	P in kg	10700	35200
axle 1	P1 in kg	2500	8000
axle 2	P2 in kg	2500	8000
axle 3	P3 in kg	1900	6400
axle 4	P4 in kg	1900	6400
axle 5	P5 in kg	1900	6400
wheel base	E in mm	6500 - 7000	
centre of gravity height	h in mm	1050	2240

	axle 1	axle 2	axle 3	axle 4	axle 5
no. of combined axles	1	1	1	1	1
no. of brake chambers per axle line KDZ	2	2	2	2	2
The power output corresponds to brake chamber manufacturer	BZ 122.1 Meritor	BZ 122.1 Meritor	BZ 119.6 Meritor	BZ 119.6 Meritor	BZ 122.1 Meritor
chamber size	20.	20.	T.14/24	T.14/24	14.
lever length lBh in mm	69	69	69	69	69
brake factor [-]	23.03	23.03	23.03	23.03	23.03
dyn. rolling radius r <sub>dyn</sub> min in mm	421	421	421	421	421
dyn. rolling radius r <sub>dyn</sub> max in mm	421	421	421	421	421
threshold torque Co Nm	6.0	6.0	6.0	6.0	6.0

calculation:

chamber pressure(rdyn min)pH at z=22,5%bar	2.3	2.3	2.0	2.0	2.0
chamber pressure(rdyn max)pH at z=22,5%bar	2.3	2.3	2.0	2.0	2.0
chamber press.(servo)pcha at pm6,5bar bar	6.2	6.2	4.5	4.5	4.5
piston force ThA at pm6,5bar N	7194	7194	4285	4285	4285
brake force(rdyn min)T lad. at pm6,5bar N	54502	54502	32356	32356	32356
brake force(rdyn max)T lad. at pm6,5bar N	54502	54502	32356	32356	32356
brake force within 1 % rolling friction proportion %	22.3	22.3	18.5	18.5	18.5

braking rate z laden 0.597 for r<sub>dyn</sub> min  
 z = sum (TR)/PRmax 0.597 for r<sub>dyn</sub> max

Trailer may only be operated in combination with trucks/tractors with ISO 7638 supply (5 or 7 polar).

brake diagram :

maximum pressure: 8.5 bar

axle 1:

valve 1: 971 002 ... 0                    WABCO  
          EBS emergency valve

valve 2: 480 207 0.. 0                    WABCO     or 480 207 2.. 0  
          EBS relay valve

brake cylinder: Meritor 20HSCLD65

axle 2:

valve 1: 971 002 ... 0                    WABCO  
          EBS emergency valve

valve 2: 480 207 0.. 0                    WABCO     or 480 207 2.. 0  
          EBS relay valve

brake cylinder: Meritor 20HSCLD65

axle 3:

valve 1: 971 002 ... 0                    WABCO  
          EBS emergency valve

valve 2: 480 102 ... 0                    WABCO  
          EBS trailer modulator

brake cylinder: Meritor 1424HTLD64

## axle 4:

valve 1: 971 002 ... 0 WABCO  
EBS emergency valve

valve 2: 480 102 ... 0 WABCO  
EBS trailer modulator

brake cylinder: Meritor 1424HTLD64

## axle 5:


valve 1: 971 002 ... 0 WABCO  
EBS emergency valve

valve 2: 480 102 ... 0 WABCO  
EBS trailer modulator


brake cylinder: Meritor 14HSCLD64

test type III (zIII = 0.30)	for rdyn min :	axle1	axle2	axle3	axle4	axle5	
at pm 3.6 bar =>	pcha in bar :	3.1	3.1	2.5	2.5	2.5	2.5
test type III (zIII = 0.06)	for rdyn min :	axle1	axle2	axle3	axle4	axle5	
at pm 1.3 bar =>	pcha in bar :	0.8	0.8	0.8	0.8	0.8	0.8


brake chamber pressure laden

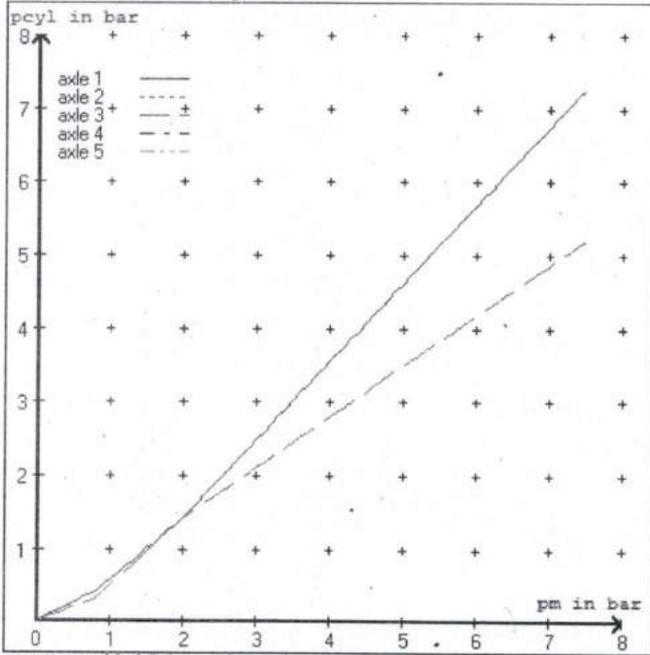


brake chamber pressure unladen

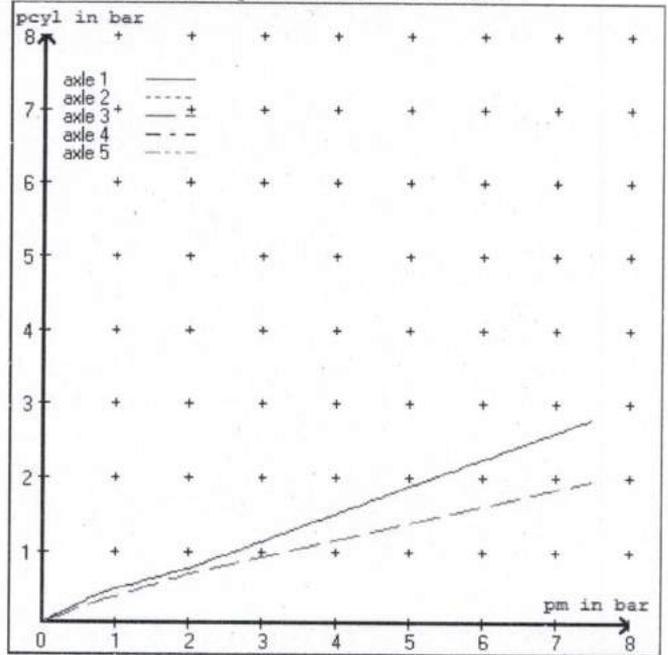


compatibility band laden

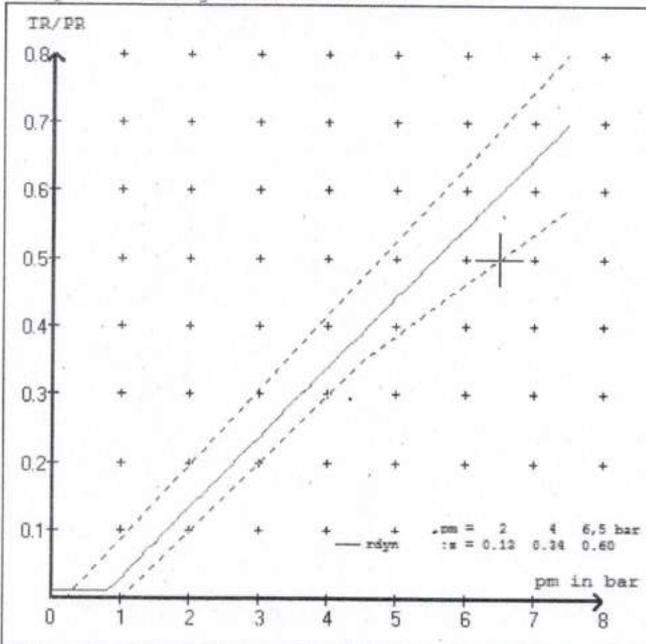


compatibility band unladen

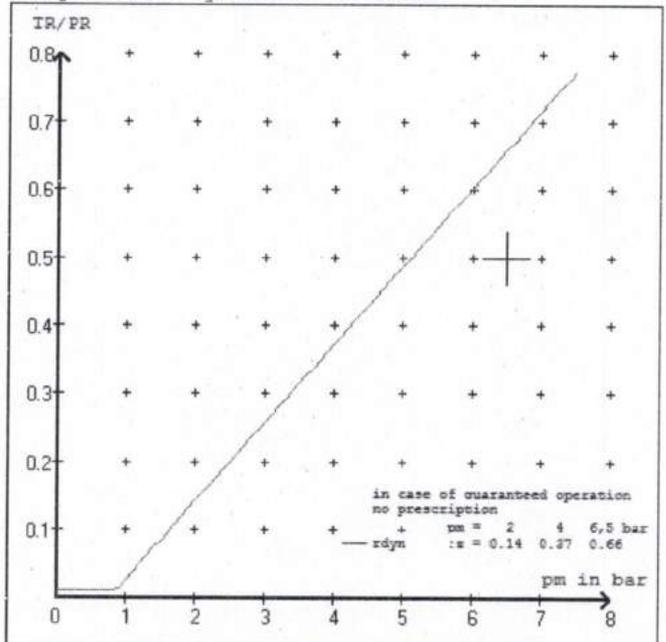

curves of friction laden

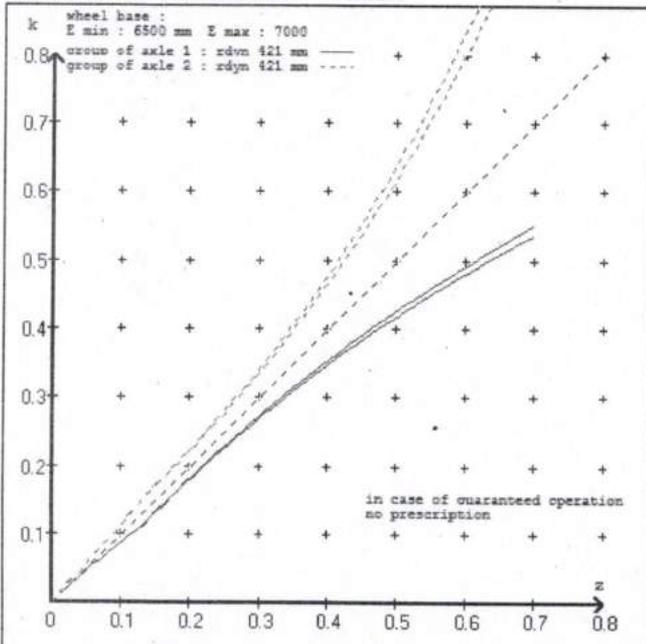

curves of friction unladen

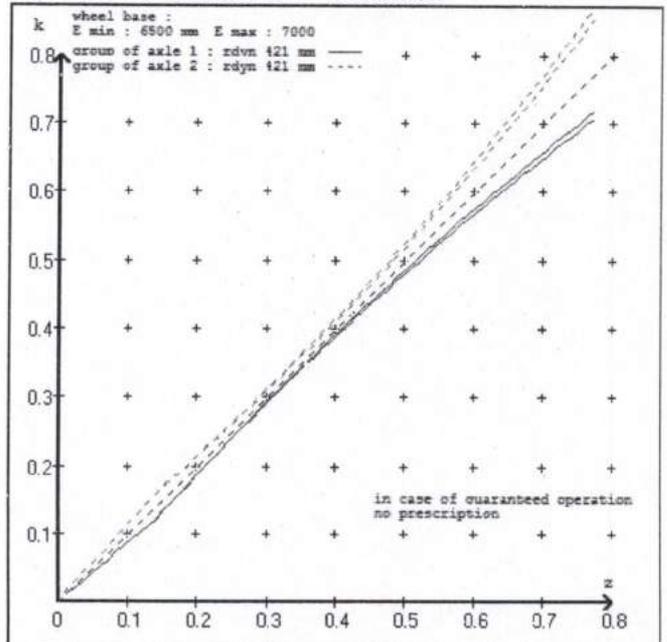

vehicle manufacturer: DOMETT TRAILERS  
 trailer model : 5AFT STOCK TRAILER  
 trailer type : 5-axle-full-trailer

brake chamber and lever length :

axle 1 : 2 x type/diameter 20. (Meritor) lever length 69 mm  
 axle 2 : 2 x type/diameter 20. (Meritor) lever length 69 mm  
 axle 3 : 2 x type/diameter T.14/24 (Meritor) lever length 69 mm  
 axle 4 : 2 x type/diameter T.14/24 (Meritor) lever length 69 mm  
 axle 5 : 2 x type/diameter 14. (Meritor) lever length 69 mm

brake diagram :

valve :  
 971 002 ... 0 WABCO EBS emergency valve  
 480 207 0.. 0 WABCO EBS relay valve or 480 207 2.. 0  
 480 102 ... 0 WABCO EBS trailer modulator

EBS input data

=====

vehicle manufacturer: DOMETT TRAILERS  
 trailer model : 5AFT STOCK TRAILER  
 trailer type : 5-axle-full-trailer  
 brake calculation no. : TP 51633A

tire circumference main axle : 2650 for rdyn max  
 tire circumference auxiliary axle : 2650 for rdyn max

assignment pm / deceleration z: pm 0.8 bar z = 0.010  
 (laden condition) 2.0 bar z = 0.134  
 6.5 bar z = 0.600

control pressure pm		6,5	control pressure pm		0.8	2.0	6.5	
axle	axle load unladen	bellow pr. unladen	brake pr. unladen	axle load laden	bellow pr. laden	brake pr. laden		
1	2500	to be	2.4	8000	to be	0.4	1.4	6.2
2	2500	entered by the vehicle manufact.	2.4	8000	entered by the vehicle manufact.	0.4	1.4	6.2
3	1900		1.7	6400		0.3	1.4	4.5
4	1900		1.7	6400		0.3	1.4	4.5
5	1900		1.7	6400		0.3	1.4	4.5

The unladen values indicated in the above table are values for the basic parameter set. Higher unladen axle loads and liftaxles are automatically recognized and do not require separate adjustment. The above unladen axle loads must not be fallen below.

=====

axle 1	axle 2	axle 3	axle 4	axle 5
axle load				
pcyl	pcyl	pcyl	pcyl	pcyl
2500 2.4	2500 2.4	1900 1.7	1900 1.7	1900 1.7
3000 2.7	3000 2.7	2400 2.0	2400 2.0	2400 2.0
3500 3.1	3500 3.1	2900 2.3	2900 2.3	2900 2.3
4000 3.4	4000 3.4	3400 2.6	3400 2.6	3400 2.6
4500 3.8	4500 3.8	3900 2.9	3900 2.9	3900 2.9
5000 4.1	5000 4.1	4400 3.3	4400 3.3	4400 3.3
5500 4.5	5500 4.5	4900 3.6	4900 3.6	4900 3.6
6000 4.8	6000 4.8	5400 3.9	5400 3.9	5400 3.9
8000 6.2	8000 6.2	6400 4.5	6400 4.5	6400 4.5

data sheet to ECE vehicle type-approval certificate concerning braking equipment: according to ECE R13 annex 11

axle 1 : reference axle: SAF	SBW 1937	brake lining: Jurid 539
test report : .	TDB 0749 ECE	date : 20130930 30.09.2013
axle 2 : reference axle: SAF	SBW 1937	brake lining: Jurid 539
test report :	TDB 0749 ECE	date : 20130930 30.09.2013
axle 3 : reference axle: SAF	SBW 1937	brake lining: Jurid 539
test report :	TDB 0749 ECE	date : 20130930 30.09.2013
axle 4 : reference axle: SAF	SBW 1937	brake lining: Jurid 539
test report :	TDB 0749 ECE	date : 20130930 30.09.2013
axle 5 : reference axle: SAF	SBW 1937	brake lining: Jurid 539
test report :	TDB 0749 ECE	date : 20130930 30.09.2013

calc. verif. of residual (hot) braking force type III  
(item 4.2.1 of appendix 2 to annex 11)

axle 1	(rdyn 421 mm)	T = 25.8 % Fe
axle 2	(rdyn 421 mm)	T = 25.8 % Fe
axle 3	(rdyn 421 mm)	T = 17.3 % Fe
axle 4	(rdyn 421 mm)	T = 17.3 % Fe
axle 5	(rdyn 421 mm)	T = 17.3 % Fe

calculated actuator stroke in mm  
(item 4.3.1.1 of appendix 2 to annex 11)

axle 1	(sp = 58 mm)	s = 39 mm
axle 2	(sp = 58 mm)	s = 39 mm
axle 3	(sp = 56 mm)	s = 39 mm
axle 4	(sp = 56 mm)	s = 39 mm
axle 5	(sp = 56 mm)	s = 39 mm

average thrust output in N at pm = 6,5 bar (however max. pcha = 7,0 bar)

axle1	ThA = 7194 N
axle2	ThA = 7194 N
axle3	ThA = 4285 N
axle4	ThA = 4285 N
axle5	ThA = 4285 N

calc. residual (hot) braking force in N  
(item 4.3.1.4 of appendix 2 to annex 11)

axle 1	(rdyn 421 mm)	T = 42560 N
axle 2	(rdyn 421 mm)	T = 42560 N
axle 3	(rdyn 421 mm)	T = 25341 N
axle 4	(rdyn 421 mm)	T = 25341 N
axle 5	(rdyn 421 mm)	T = 25341 N

basic test	type III
of subject	(calculated)
trailer (E)	residual
	(hot)braking
	0.47

braking rate of the vehicle  
(item 4.3.2 to appendix 2 to annex 11)

0.60

required braking rate  
(items 1.5.3 and 1.7.2 to annex 11)

>= 0,4 and  
>= 0,6\*E (0.36)

axle 1	(rdyn 421 mm)	T = 42560 N
axle 2	(rdyn 421 mm)	T = 42560 N
axle 3	(rdyn 421 mm)	T = 25341 N
axle 4	(rdyn 421 mm)	T = 25341 N
axle 5	(rdyn 421 mm)	T = 25341 N

basic test	type III
of subject	(calculated)
trailer (E)	residual
	(hot)braking
	0.47

braking rate of the vehicle  
(item 4.3.2 to appendix 2 to annex 11)

0.60

required braking rate  
(items 1.5.3 and 1.7.2 to annex 11)

>= 0,4 and  
>= 0,6\*E (0.36)




**reference values**

reference values for z = 50% for max rdyn: 421 mm

	pz [bar]	T [N]	T [N]
axle 1	1.0	5095	
	6.2	45647	
axle 2	1.0	5095	
	6.2	45647	
axle 3	1.0		4901
	4.5		27099
axle 4	1.0		4901
	4.5		27099
axle 5	1.0		4901
	4.5		27099

VIN - no.:

	Axle(s) / Achse(n)				
brake cylinder type (service / parking) Bremszylinder Typ (Betrieb / Fest)	20./	20./	T.14/24	T.14/24	14./
Maximum stroke smax = ...mm maximaler Hub smax = ....mm	65	65	64	64	64
Lever length = ....mm Hebellänge = ....mm	69.08	69.08	69.08	69.08	69.08

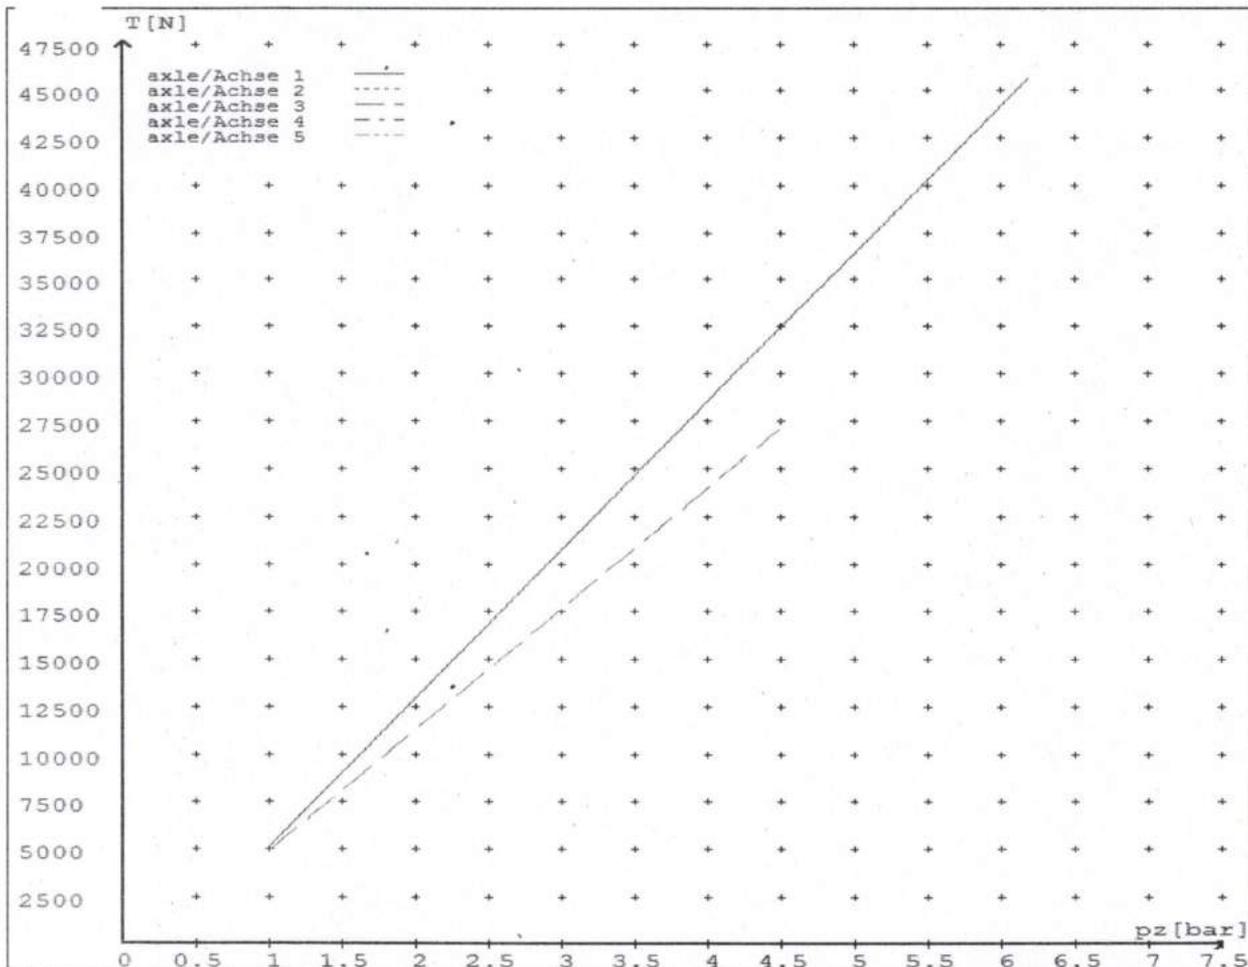

**NOTICE TO VEHICLE OPERATOR**

*THIS VEHICLE HAS A BRAKE SYSTEM WHICH HAS BEEN DESIGNED AND FITTED IN ACCORDANCE WITH THE LAND TRANSPORT HEAVY VEHICLE BRAKE RULE 32015/4.*

*IF THIS VEHICLE IS OPERATED IN CONJUNCTION WITH NON-CERTIFIED VEHICLES, THERE MAY BE OPERATIONAL FACTORS WHICH NEED TO BE TAKEN INTO CONSIDERATION.*

*PLEASE REFER TO THE CERTIFIER FOR FURTHER INFORMATION.*

**EXCERPT FROM LAND TRANSPORT RULE; HEAVY-VEHICLE BRAKES RULE 32015/4. SECTION 10,**

**10.1 RESPONSIBILITIES OF OPERATORS**

A person who operates a vehicle must ensure that the vehicle complies with this rule.

**10.2 RESPONSIBILITIES OF REPAIRERS**

A person who repairs or adjusts a brake must ensure that the repair or adjustment:

- a) does not prevent the vehicle from complying with this rule;
- b) complies with Land Transport Rule: Vehicle Repair 1998.

**10.3 RESPONSIBILITIES OF MODIFIERS**

A person who modifies a vehicle so as to affect the braking performance of the vehicle must:

- a) ensure that the modification does not prevent the vehicle from complying with this Rule; and
- b) notify the operator that the vehicle must be inspected and, if necessary, certified by person or organisation appointed to carry out specialist inspection and certification of heavy vehicle brakes.

***IF YOU ARE UNSURE ABOUT YOUR RESPONSIBILITIES, PLEASE CONTACT THE VEHICLE MANUFACTURER, OR MYSELF.***

***COMPLAINTS. Complaints and Warranty issues which relate to Brake Certification will be acknowledged within 7 working days and a resolution proposed within 25 working days. Resolution of complaints and Warranty issues is subject to Transpecs Warranty policy. Customers have the right to appeal to the New Zealand Transport Authority if dissatisfied with a Compliance issue. (Refer NZTA Deed Of Appointment Para 47.4) NZTA Helpdesk 0800 699 000***

(p.p.).....  
(J.Hirst (JEH) HVEK)

**NOTICE TO VEHICLE OPERATOR**

This trailer is equipped with an Electronic Brake System.


To comply with the New Zealand Heavy Vehicle Brake Rule 32015/4, it must be used only in conjunction with a truck/tractor equipped with a 5 or 7 pin ABS/EBS power supply socket.

Failure to connect to such supply invalidates Brake Rule compliance.

The trailer ABS/EBS warning light on the towing vehicle dashboard must illuminate when the ignition is switched on and extinguish when the vehicle is in motion.

If the light does not illuminate when ignition is switched on, the system must be checked. If the light remains illuminated when the vehicle is in motion, Brake Rule compliance is compromised. Repairs must be made as soon as possible.

**If you are unsure of your responsibilities and/or obligations, please contact either  
the vehicle manufacturer or myself.**

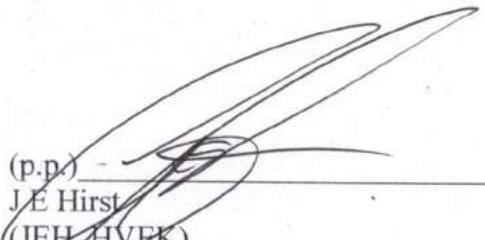  
(p.p.) -  
J E Hirst  
(JEH/HVEK)  
(09 980 7300)

**HEAVY VEHICLE BRAKE RULE  
32015/4 WORKSHEET  
(PROCEDURE DOCUMENTATION SHEET-PDS)  
&  
CONFIRMATION OF COMPLIANCE**

CERTIFICATE NO. JH171114

CUSTOMER NAME DOMETT TRAILERS LTD

CUSTOMER ORDER NO. 4934                      DATE RECEIVED 20-Nov-17

VEHICLE TYPE STOCK TRAILER

VIN/ CHASSIS NO. 7 A 9 E 2 5 0 1 6 H 1 0 2 3 6 6 6

**BRIEF SPECIFICATION AS CERTIFIED TO SCHEDULE 5**

<u>BRAKE VALVES</u>	<u>MAKE</u>	<u>TYPE</u>
PRIMARY RELAY	WABCO	480 102 08. 0
SECONDARY RELAY	WABCO	480 207 202 0
YARD RELEASE VALVE	SEALCO	17600B
PARK BRAKE VALVE	SEALCO	110701
<u>SUSP. VALVES [WABCO]</u>	<u>FRONT</u>	<u>REAR</u>
CONTROL	441 044 101 0	N/A
DISTANCE SENSOR	464 008 011 0	464 008.011 0

**OTHER VALVES:**

MAKE:	WABCO	TYPE:	461 513 002 0	SETTING:	5.5 Bar
MAKE:	WABCO	TYPE:	446-192-110-0	SETTING:	SMARTBOARD
MAKE:	_____	TYPE:	_____	SETTING:	_____
MAKE:	_____	TYPE:	_____	SETTING:	_____

**BRAKE CHAMBERS:**

	<b>AXLE 1 &amp; 2</b>	<b>AXLE 3 &amp; 4</b>	<b>AXLE 5</b>
<b>MAKE</b>	TSE	TSE	TSE
<b>SIZE</b>	20HSCLD65	1416HTLD64	14HSCLD64
<b>MAX STROKE (mm)</b>	65	64	64
<b>SLACK LENGTH (mm)</b>	69	69	69

**DRUM TYPE:**

N/A	N/A	N/A
-----	-----	-----

**OR****BRAKE CALIPER:**

SBW1937	SBW1937	SBW1937
---------	---------	---------

**FRICTION MATERIAL:** OEM AFTERMARKET**LINING BRAND****AXLE 1 & 2****AXLE 3 & 4****AXLE 5**

JURID 539

JURID 539

JURID 539

**OTHERS:****TYRES:****FRONT****REAR**

265 70 R 19.5

265 70 R 19.5

**BRAKE CALCULATION #:**

TP51633

**COMMENTS:**

EBS, SPECIAL CONDITIONS APPLY. SEE INSTRUCTIONS ON LT400 #

**SALES ORDER #:**

SO912638

**PROCESS TIME:**

1 HOUR

**TRAILERS EQUIPPED WITH PREV: THE PARK BRAKE PERFORMANCE MUST BE**

MEASURED BY PULLING THE RED ACTUATION KNOB ON THE PREV VALVE WHEN

THE AXLES - EQUIPPED WITH SPRING BRAKES - ARE IN THE BRAKE ROLLERS. THE

PARK BRAKE IN THE CAB **MUST NOT** BE APPLIED.**NOTES:****CHAMBERS & PARK BRAKE PERFORMANCE:**REFER TO BRAKE CALCULATION TP51633:  $z = 0.289 @ 96377 (N)$ FRONT FRICTION ( $\mu$ ) = 0.48

TSE 1416HTLD64 ARE NOT LISTED IN WABCOBRAKE. TSE 1616HTLD ARE USED TO DETERMINE


THE PARK BRAKE PERFORMANCE

**CONFORMATION OF COMPLIANCE**

*I CONFIRM THAT THE VEHICLE IDENTIFIED IN PAGES 1 AND 2 OF THIS CONFORMATION OF COMPLIANCE COMPLIES WITH ALL RELEVANT REQUIREMENTS OF THE CURRENT NEW ZEALAND HEAVY VEHICLE BRAKE RULE 32015/4, SCHEDULE 5.*

**DATE:** 20-Nov-17

**SIGNED: (pp)**

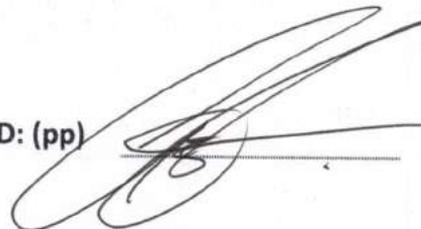

**NAME & ID:** J HIRST (JEH)

**PHONE (BUS):** 09 980 7300

**FAX (BUS)** 09 980 7306

**POSTAL ADDRESS:** TRANSPORT SPECIALTIES LTD  
PO BOX 98-971,  
MANUKAU CITY,  
MANUKAU 2241

**POSITION:** BRAKE CERTIFIER HVEK

*I CONFIRM THE BRAKE SYSTEM OF THE VEHICLE IDENTIFIED IN PAGE 1 OF THIS STATEMENT OF COMPLIANCE AS MODIFIED BY MYSELF, CONTINUES TO COMPLY WITH ALL THE RELIVANT REQUIREMENTS OF THE CURRENT NEW ZEALAND HEAVY BRAKE RULE 32015/4 SCHEDULE 5.*

**DATE:**

**SIGNED:**

**NAME:**

**CERTIFIERS ID:**

**POSITION:**

**PHONE (BUS):**

**FAX (BUS):**

**COMMENTS:**

---

---

---

---