

# Heavy vehicle specialist certificate

Must be presented to a CoF (heavy) inspecting organisation  
Heavy vehicle specialist inspector and inspecting organisation

Heavy vehicle specialist inspector's or manufacturing inspecting organisation's name (PRINT IN CAPS) **CHRIS CLARKE** ID **CJC**

Vehicle registration (optional) \_\_\_\_\_ VIN/chassis number **7A9D10014J1023723**

Make **DOMETT** Component being certified:  Chassis  Load anchorage  
 Log bolsters  Towing connection  Brakes  
 SRT  PSV stability  PSV rollover  
 Swept path  PBS

Description of work  
**CERTIFY TO HEAVY VEHICLE BRAKE RULE 32015/4.**  
**NEW ZEALAND HEAVY VEHICLE BRAKE SPECIFICATION.**

Code/standard/rule certified to **SCHEDULE 5** Component load rating(s) **GVM 26,000 Kgs**  
**BRAKES 30,000 Kgs**  
 General drawing number(s) **N/A**


Supporting documents  
**BRAKE CODE CERTIFICATE LC180515**  
**SODC LC180515**

Special conditions (optional)  
**WARNING LAMP MUST ILLUMINATE WHEN IGNITION IS SWITCHED ON & THEN EXTINGUISH IMMEDIATELY OR WHEN VEHICLE SPEED EXCEEDS 7 KPH**

Certification expiry date (if applicable) **UNTIL MODIFIED or CHANGE OF USE** or Hubodometer reading (whichever comes first) \_\_\_\_\_

**Declaration**

I the undersigned, declare that I am the heavy vehicle specialist inspector identified and I hold a current valid appointment. I certify that the above mentioned vehicle component's design, manufacture and installation, and this certification complies in all respects with the Land Transport Rule: Vehicle Standards Compliance 2002 and my appointment. To the best of my knowledge the information contained in the certificate is true and correct.

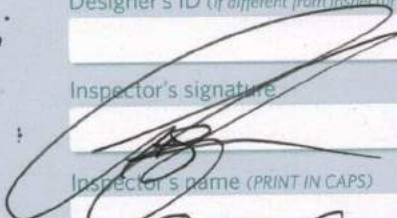Designer's ID (if different from inspector below) \_\_\_\_\_  
 Inspector's signature   
 Inspector's name (PRINT IN CAPS) **CHRIS CLARKE** ID number **CJC**  
 Date **17-Jul-18** Number **647162**

CoF vehicle inspector ID \_\_\_\_\_ CoF vehicle inspector signature \_\_\_\_\_ Date \_\_\_\_\_

All fields are mandatory unless otherwise stated.

# WABCO START-UP LOG

System	Trailer EBS-E	WABCO part number	480 102 064 0
Production date	2017-11-17	Serial number	436040806800B
Serial number (modulator)	000000161272		
Fingerprint Customer EOL / Customer Development / Flash Program	W503643 / 2018-07-17 ; 00000000 / 0000-00-00 ; 00000000 / 0000-00-00		

## WABCO TRAILER EBS-E

GGVS/ADR TUEH TB 2007 - 019.00  
361-005-16

HERSTELLER MANUFACTURER CONSTRUCTEUR	DOMETT			GIO	Pin1	Pin3	Pin4
TYPE TYPE TYPE	4A TANKER, D1001			1	24V-O1	---	---
VEHICLE IDENT. NUMBER CHASSIS NUMBER NUMERO DE CHASSIS	7A9D10014J1023723			2	---	---	---
BREMSBERECHNUNG-NR. BRAKE CALCULATION NO. CALCUL. DE FREINAGE NO.	TP2018ROR			3	ALS2	ALS2	---
POLRADZAHNZAHL c-d   e-f POLE WHEEL TEETH c-d   e-f DENTS ROUE DENTÉE c-d   e-f	90	90	ABS-System ABS-System Système ABS	4	---	---	---
			4S/3M	5	DIAG	DIAG	DIAG
RSS RSS RSS	Einfachbereifung Single Tire Monte simple		Lenkachse Steering axle Essieu vireur	6	---	---	---
	Zwillingsbereifung Twin Tire Monte jumelle	X	Kipptisches Fahrzeug Critical Trailer Véhicule critique	7	---	---	---
Subsystems	SB	I/O	24N				

ACHSE AXLE ESSIEU	pm (bar)		6.5		pm (bar)		0.8		2.0		---		6.5		TYP TYPE	(mm)	(mm)	(bar)	
	+	-	+	-	+	-	+	-	+	-	+	-	1.0	Pz					
1	1400	0.4	1.5	7500	4.4	0.4	1.3	---	5.5	-	20	65	76	539	4277				
2	1400	0.4	1.5	7500	4.4	0.4	1.3	---	5.5	-	20	65	76	539	4277				
3	1200	0.3	1.2	7500	4.4	0.4	1.5	---	4.6	-	16 / 24	64	76	479	3078				
4	1200	0.3	1.2	7500	4.4	0.4	1.5	---	4.6	-	16 / 24	64	76	479	3078				
5	0	---	---	0	---	---	---	---	---	-	---	---	---	---	---				

### TEBS-E

Diagnostic memory	OK	Warning lamp control	OK
Parameter setting	carried out	Stop light supply	OK
EBS pressure test	OK	Lifting axle test	Not tested
Redundancy test	OK	ECAS height sensor calibration	Not tested
ABS sensor assignment	OK	Height sensor axle load	Not tested
RTR test	Not tested	Leak test	Not tested
Immobilizer test	Not tested	Signal outputs	Not tested
Signal inputs	Not tested	Tag axle test	Not tested

### Electronic Extension Module

Diagnostic memory	Not tested	Signal outputs	Not tested
TailGUARDlight	Not tested	TailGUARD	Not tested

Manufacturer	DOMETT	Vehicle ident. no	7A9D10014J1023723
Vehicle type	4A TANKER, D1001	Odometer reading	0.0 km
next Service	0 km	Trip reading	0.0 km
Tester	Chris Clarke	Signature	
Date	2018-07-17 10:59:08 a.m.		

trailer (full, semi-, centre-axle) with air brake system acc. to UN/ECE-R.13.11

distribution: DOMETT  
2018 ROR 4A WPC

please note!

This brake calculation is made under consideration of  
 -the legal prescriptions mentioned above in the version valid at the time of making the program (V6.14.04.20).  
 -the functional characteristics of our products as well as the data of the brake out of the test approvals of the axle manufacturers, and  
 -the other vehicle data included in the brake calculation.  
 Please check whether these data correspond to the actual vehicle data.  
 Our conditions of delivery apply (particularly section 9.0).  
 In any case we commend to do a braking harmonisation!  
 WABCO Brake V6.14.04.20 db 20.04.2016

vehicle manufacturer: DOMETT  
 trailer model : 4A TANKER, D1001  
 trailer type : 4-axle-full-trailer  
 remarks : air / hydraulic / VA suspension  
 WABCO TRAILER - EBS  
 TRISTOP 3+4: T.16/24  
 265/70 R 19,5

axle 1 + 2 + 3 + 4 : Assali Stefen, K, 361-005-16,

		<u>unladen</u>	<u>laden</u>
total mass	P in kg	5200	30000
axle 1	P1 in kg	1400	7500
axle 2	P2 in kg	1400	7500
axle 3	P3 in kg	1200	7500
axle 4	P4 in kg	1200	7500
wheel base	E in mm	5070 - 5070	
centre of gravity height	h in mm	900	1538

		<u>axle 1</u>	<u>axle 2</u>	<u>axle 3</u>	<u>axle 4</u>
no. of combined axles		1	1	1	1
no. of brake chambers per axle line	KDZ	2	2	2	2
The power output corresponds to		BZ 122.1	BZ 122.1	BZ 119.6	BZ 119.6
brake chamber manufacturer		Meritor	Meritor	Meritor	Meritor
chamber size		20.	20.	T.16/24	T.16/24
lever length	lBh in mm	76	76	76	76
brake factor	[-]	22.37	22.37	22.37	22.37
dyn. rolling radius	rdyn min in mm	421	421	421	421
dyn. rolling radius	rdyn max in mm	421	421	421	421
threshold torque	Co Nm	6.0	6.0	6.0	6.0

calculation:

chamber pressure(rdyn min)pH at z=22,5%bar	2.1	2.1	2.1	2.1
chamber pressure(rdyn max)pH at z=22,5%bar	2.1	2.1	2.1	2.1
chamber press.(servo)pcha at pm6,5bar bar	5.5	5.5	4.6	4.6
piston force ThA at pm6,5bar N	6332	6332	4555	4555
brake force(rdyn min)T lad. at pm6,5bar N	51239	51239	36884	36884
brake force(rdyn max)T lad. at pm6,5bar N	51239	51239	36884	36884
brake force within 1 % rolling friction proportion %	26.7	26.7	23.3	23.3

braking rate z laden 0.599 for rdyn min  
 z = sum (TR)/PRmax 0.599 for rdyn max

Trailer may only be operated in combination with trucks/tractors with ISO 7638 supply (5 or 7 polar).

brake diagram :

maximum pressure: 8.5 bar

axle 1:

valve 1: 480 207 0.. 0 WABCO or 480 207 2.. 0  
EBS relay valve

brake cylinder: Meritor 20HSCLD65

axle 2:

valve 1: 480 207 0.. 0 WABCO or 480 207 2.. 0  
EBS relay valve

brake cylinder: Meritor 20HSCLD65

axle 3:

valve 1: 480 102 ... 0 WABCO  
EBS trailer modulator



brake cylinder: Meritor 1624HTLD64

axle 4:

valve 1: 480 102 ... 0 WABCO ;  
EBS trailer modulator



brake cylinder: Meritor 1624HTLD64

test type III (zIII = 0.30)	for rdyn min :	axle1	axle2	axle3	axle4	
at pm 3.6 bar =>	pcha in bar :	2.8	2.8	2.5	2.6	
test type III (zIII = 0.06)	for rdyn min :	axle1	axle2	axle3	axle4	
at pm 1.3 bar =>	pcha in bar :	0.8	0.8	0.9	0.9	

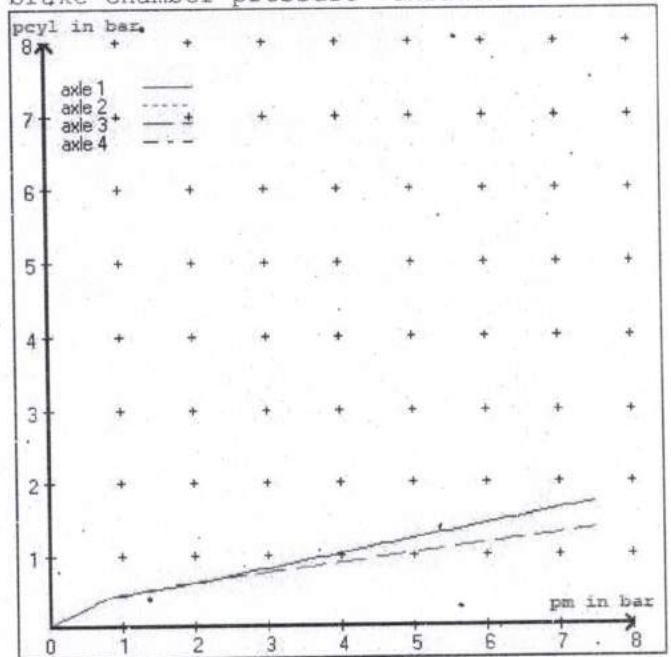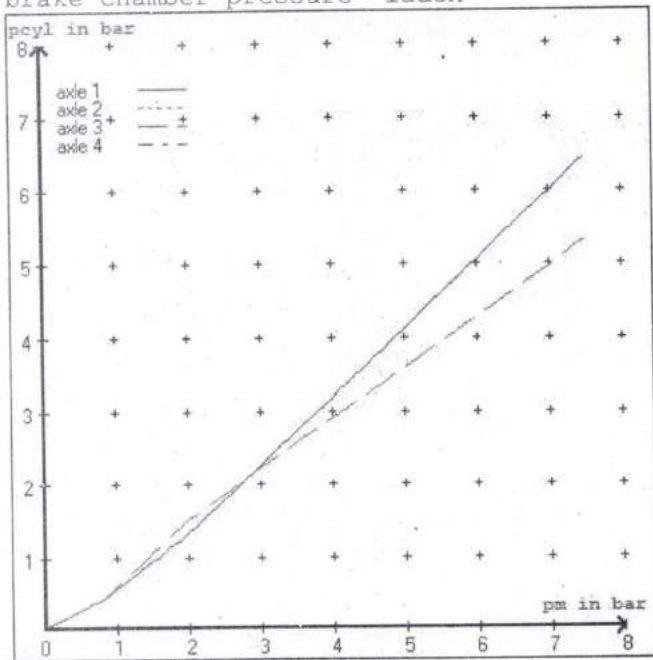



compatibility band laden

compatibility band unladen

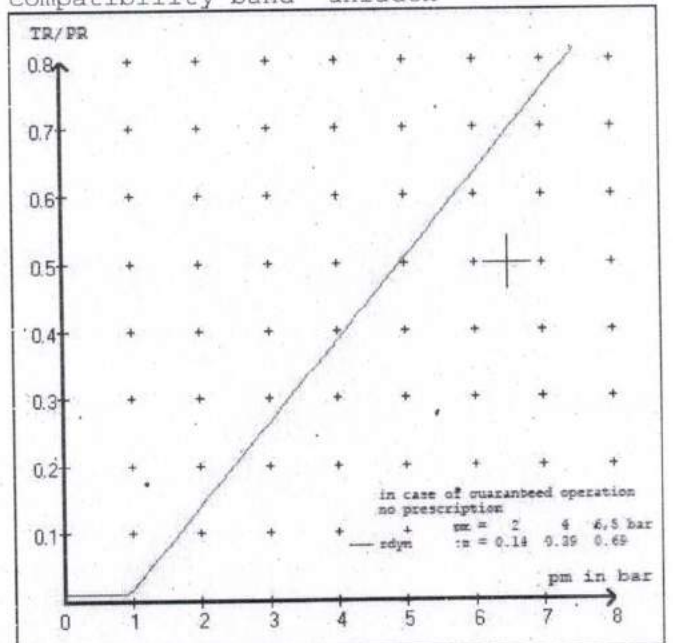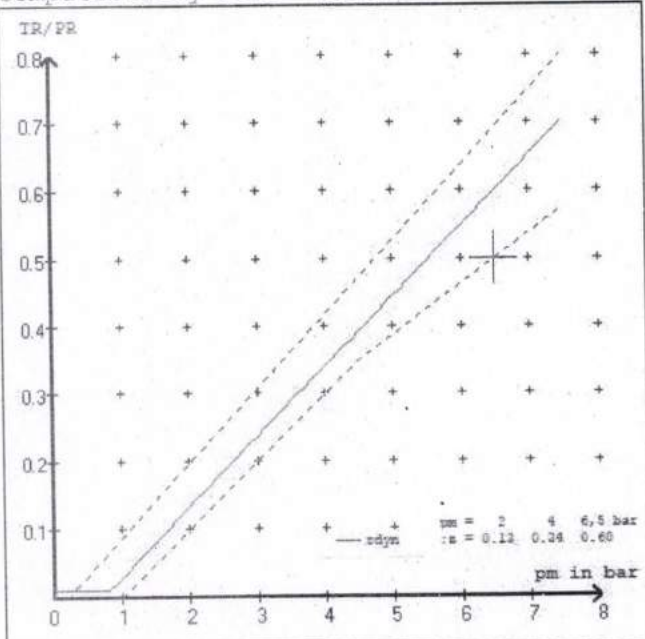

curves of friction laden

curves of friction unladen

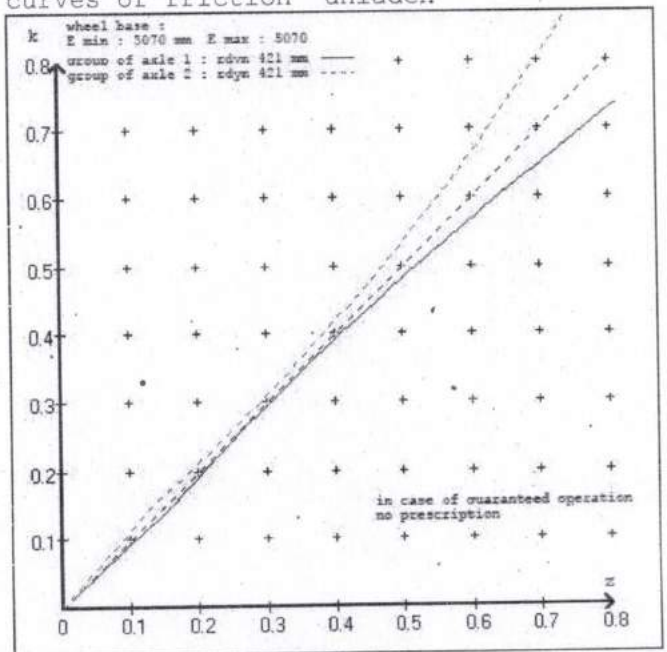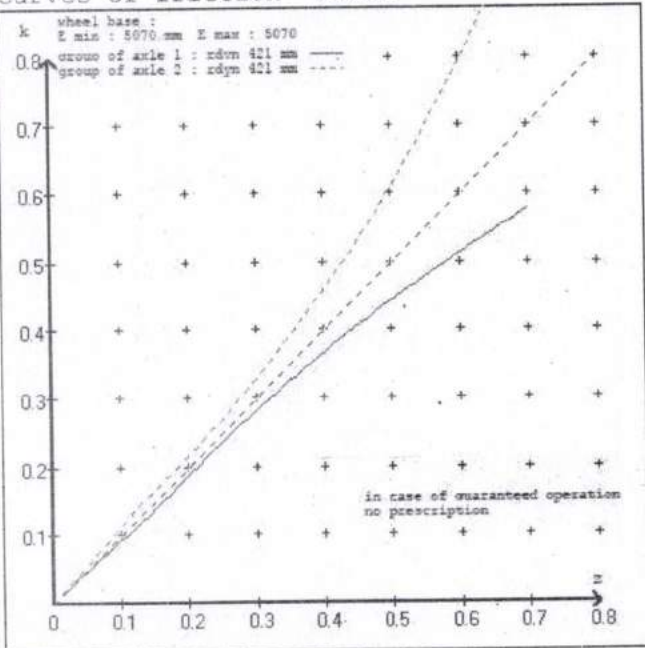

vehicle manufacturer: DOMETT  
 trailer model : 4A TANKER, D1001  
 trailer type : 4-axle-full-trailer

brake chamber and lever length :

axle 1 : 2 x type/diameter 20. (Meritor) lever length 76 mm  
 axle 2 : 2 x type/diameter 20. (Meritor) lever length 76 mm  
 axle 3 : 2 x type/diameter T.16/24 (Meritor) lever length 76 mm  
 axle 4 : 2 x type/diameter T.16/24 (Meritor) lever length 76 mm

brake diagram :

valve :  
 480 207 0.. 0 WABCO EBS relay valve or 480 207 2.. 0  
 480 102 ... 0 WABCO EBS trailer modulator

EBS input data

vehicle manufacturer: DOMETT  
 trailer model : 4A TANKER, D1001  
 trailer type : 4-axle-full-trailer  
 brake calculation no. : TP 2018A

tire circumference main axle : 2650 for rdyn max  
 tire circumference auxiliary axle : 2650 for rdyn max

assignment pm / deceleration z: pm 0.8 bar z = 0.010  
 (laden condition) 2.0 bar z = 0.134  
 6.5 bar z = 0.600

control pressure pm			6,5	control pressure pm			0.8	2.0	6.5
axle	axle load unladen	bellow pr. unladen	brake pr. unladen	axle load laden	bellow pr. laden	brake pr. laden			
1	1400	to be	1.5	7500	to be	0.4	1.3	5.5	
2	1400	entered by the vehicle manufact.	1.5	7500	entered by the vehicle manufact.	0.4	1.3	5.5	
3	1200		1.2	7500		0.4	1.5	4.6	
4	1200		1.2	7500		0.4	1.5	4.6	
5	0		0,0	0		0,0	0,0	0,0	

The unladen values indicated in the above table are values for the basic parameter set. Higher unladen axle loads and liftaxles are automatically recognized and do not require separate adjustment. The above unladen axle loads must not be fallen below.

axle 1	axle 2	axle 3	axle 4
axle load pcyl	axle load pcyl	axle load pcyl	axle load pcyl
1400 1.5	1400 1.5	1200 1.2	1200 1.2
1900 1.8	1900 1.8	1700 1.5	1700 1.5
2400 2.2	2400 2.2	2200 1.7	2200 1.7
2900 2.5	2900 2.5	2700 2.0	2700 2.0
3400 2.8	3400 2.8	3200 2.3	3200 2.3
3900 3.1	3900 3.1	3700 2.5	3700 2.5
4400 3.5	4400 3.5	4200 2.8	4200 2.8
4900 3.8	4900 3.8	4700 3.1	4700 3.1
7500 5.5	7500 5.5	7500 4.6	7500 4.6

data sheet to ECE vehicle type-approval certificate concerning braking equipment: according to ECE R13 annex 11

axle 1 : reference axle: Assali StefLM or LC or TMen	brake lining: FER 5200-215
test report : 361-005-16	date : 09-02-2016
axle 2 : reference axle: Assali StefLM or LC or TMen	brake lining: FER 5200-215
test report : 361-005-16	date : 09-02-2016
axle 3 : reference axle: Assali StefLM or LC or TMen	brake lining: FER 5200-215
test report : 361-005-16	date : 09-02-2016
axle 4 : reference axle: Assali StefLM or LC or TMen	brake lining: FER 5200-215
test report : 361-005-16	date : 09-02-2016

calc. verif. of residual (hot) braking force type III  
(item 4.2.1 of appendix 2 to annex 11)

axle 1 (rdyn 421 mm)	T = 24.4 % Fe
axle 2 (rdyn 421 mm)	T = 24.4 % Fe
axle 3 (rdyn 421 mm)	T = 19.7 % Fe
axle 4 (rdyn 421 mm)	T = 19.7 % Fe

calculated actuator stroke in mm  
(item 4.3.1.1 of appendix 2 to annex 11)

axle 1 (sp = 58 mm)	s = 37 mm
axle 2 (sp = 58 mm)	s = 37 mm
axle 3 (sp = 57 mm)	s = 37 mm
axle 4 (sp = 57 mm)	s = 37 mm

average thrust output in N at pm = 6,5 bar (however max. pcha = 7,0 bar)

axle1	ThA = 6332 N
axle2	ThA = 6332 N
axle3	ThA = 4555 N
axle4	ThA = 4555 N

calc. residual (hot) braking force in N  
(item 4.3.1.4 of appendix 2 to annex 11)

axle 1 (rdyn 421 mm)	T = 49452 N
axle 2 (rdyn 421 mm)	T = 49452 N
axle 3 (rdyn 421 mm)	T = 35608 N
axle 4 (rdyn 421 mm)	T = 35608 N

braking rate of the vehicle (item 4.3.2 to appendix 2 to annex 11)	basic test of subject trailer (E)	type III (calculated) residual (hot)braking
	0.60	0.58

required braking rate (items 1.5.3 and 1.7.2 to annex 11)  $\geq 0,4$  and  $\geq 0,6 * E (0.36)$

axle 1 (rdyn 421 mm)	T = 49452 N
axle 2 (rdyn 421 mm)	T = 49452 N
axle 3 (rdyn 421 mm)	T = 35608 N
axle 4 (rdyn 421 mm)	T = 35608 N

braking rate of the vehicle (item 4.3.2 to appendix 2 to annex 11)	basic test of subject trailer (E)	type III (calculated) residual (hot)braking
	0.60	0.58

required braking rate (items 1.5.3 and 1.7.2 to annex 11)  $\geq 0,4$  and  $\geq 0,6 * E (0.36)$



spring parking brake

	axle 3	axle 4
no of TRISTOP-actuators per axle line KDZ	2	2
TRISTOP-actuator type	T.16/24	T.16/24
lever length	76	76
stat. tyre radius	401	401
at a stroke of	30	30
min. force of spring brake	7605	7605
sp.brake chamber no Meritor.....	4	4
release pressure	4.8	4.8

calculation:

ratio until road	4.2397	4.2397
$iFb = lBh \cdot \eta \cdot C \cdot rBt / (rBn \cdot rstat)$		
for rstat	401	401
brake force of spring br. Tf in N	63816	63816
$Tf = (TFZ \cdot KDZ - 2 \cdot Co / lBh) \cdot iFb$		
braking rate	0.444	
$zf = \text{sum}(Tf) / P + 0,01$		

Test of the frictional connection required by the parking brake

minimum wheelbase/minimum supporting width min Ef necessary to fulfil the regulations

$$\min Ef = E \cdot (1 - PR/P + zferf \cdot h/E) / (1 - zferf / (fzul \cdot nf/ng))$$

$$\min Ef = 3628 \text{ mm for } E = 5070 \text{ mm}$$

$$\min Ef = 3628 \text{ mm for } E = 5070 \text{ mm}$$

min Ef = minimum distance between front axle(s) (trailer) or support (semitraile) and the rear axle(s) (resultant of the bogie)

E = wheel base

fzul = 0.80 maximum permissible frictional connection required

zferf = 0.18 maximum required braking ratio of the parking brake

h = 1538 mm height of center of gravity - laden

PR = 15000 kg maximum bogie mass - laden

P = 30000 kg maximum total mass - laden

nf = 2 no. of axle(s) with TRISTOP spring brake actuators

ng = 2 no. of bogie axle(s)

axle manufacturer  
 type of brake  
 type of axle

axle 1 + 2 + 3 + 4  
 Assali Stefen  
 K  
 LM or LC or TM  
 361-005-16

test report of characteristic value

adm. stat. axle load  
 tested axle load  
 max. adm. tyre radius  
 adm. cam. torque (6,5 bar)  
 lining area per brake  
 no. of brake cylinder  
 brakefactor (SB) Bf  
 brakefactor (PB) Bf  
 threshold torque (Co,dec)

Pstat in kg 11000  
 Pe in kg 10200  
 Rezul in mm 999  
 Czul in Nm 940  
 AB in cm<sup>2</sup> 304  
 - 2  
 - 22.37  
 - 22.37  
 Mo in Nm 6

date  
 brake lining  
 cam torque  
 brake force  
 stroke  
 tested tyre radius  
 tested lever length  
 threshold torque (Co,e)

09-02-2016  
 FER 5200-215  
 Ce in Nm 638  
 TeIII in daN 5366  
 seIII in mm 37  
 Re in mm 518  
 le in mm 76  
 in Nm 6


reference values

reference values for z = 50% for max rdyn: 421 mm

	pz [bar]	T [N]	T [N]
axle 1	1.0	5394	
	5.5	42770	
axle 2	1.0	5394	
	5.5	42770	
axle 3	1.0		4794
	4.6		30788
axle 4	1.0		4794
	4.6		30788

VIN - no.:

	Axle(s) / Achse(n)				
brake cylinder type (service / parking) Bremszylinder Typ (Betrieb / Fest)	20./	20./	T.16/24	T.16/24	/
Maximum stroke smax = ...mm maximaler Hub smax = ....mm	65	65	64	64	
Lever length = ....mm Hebellänge = ....mm	76	76	76	76	

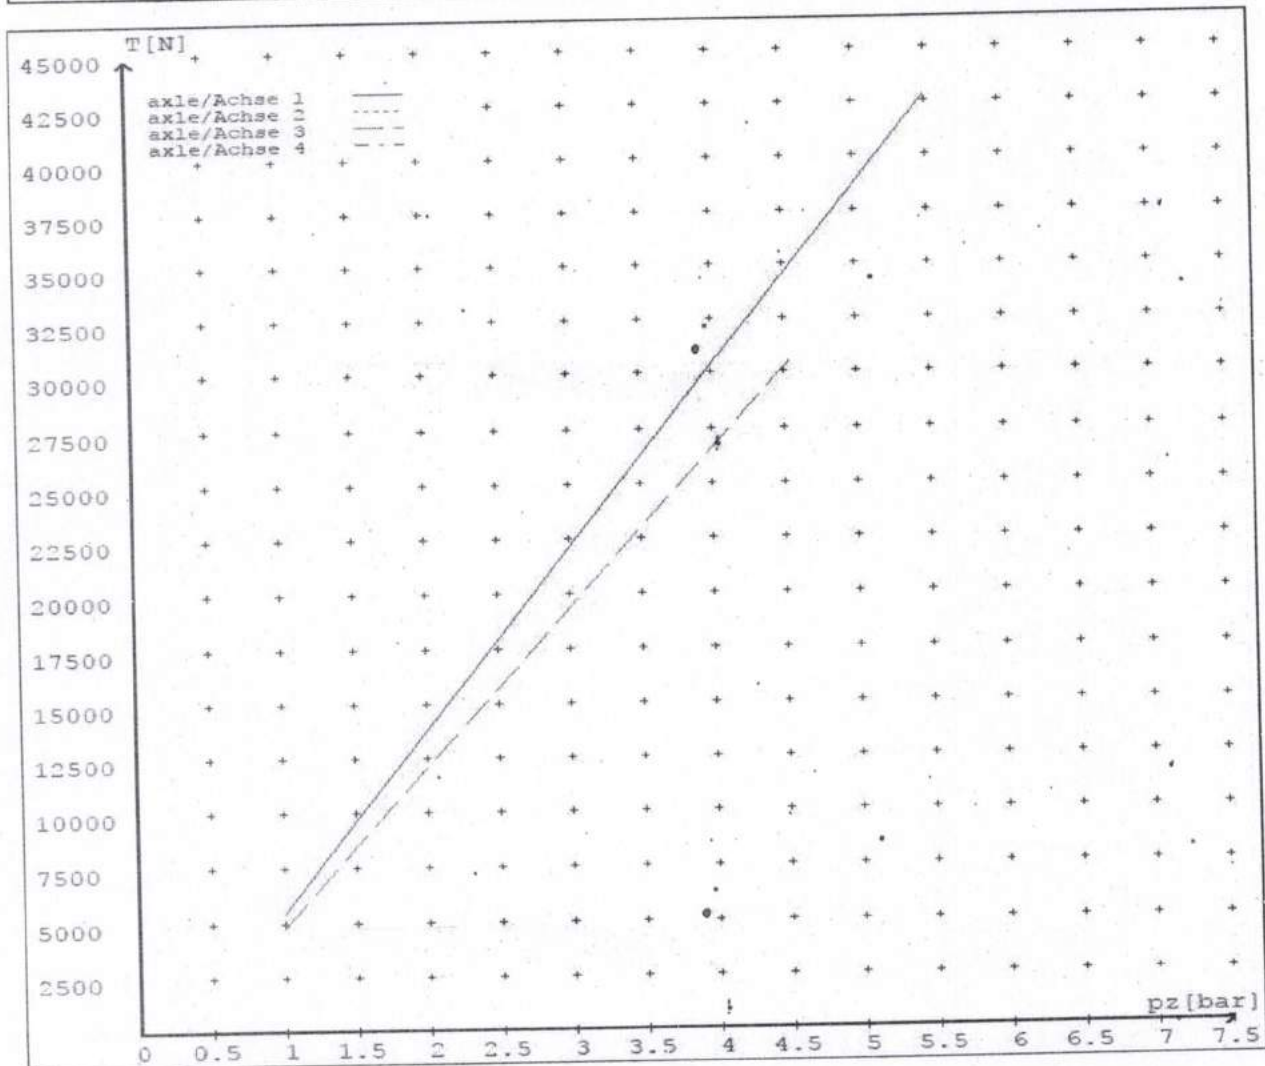

reference values for  $z = 0.5$


for max rdyn: 421 mm

Angabe der Referenzwerte für  $z = 0.5$

für max rdyn: 421 mm

brake calculation no: TP 2018A date 20.03.2018

Bremsberechnung Nr: TP 2018A vom 20.03.2018

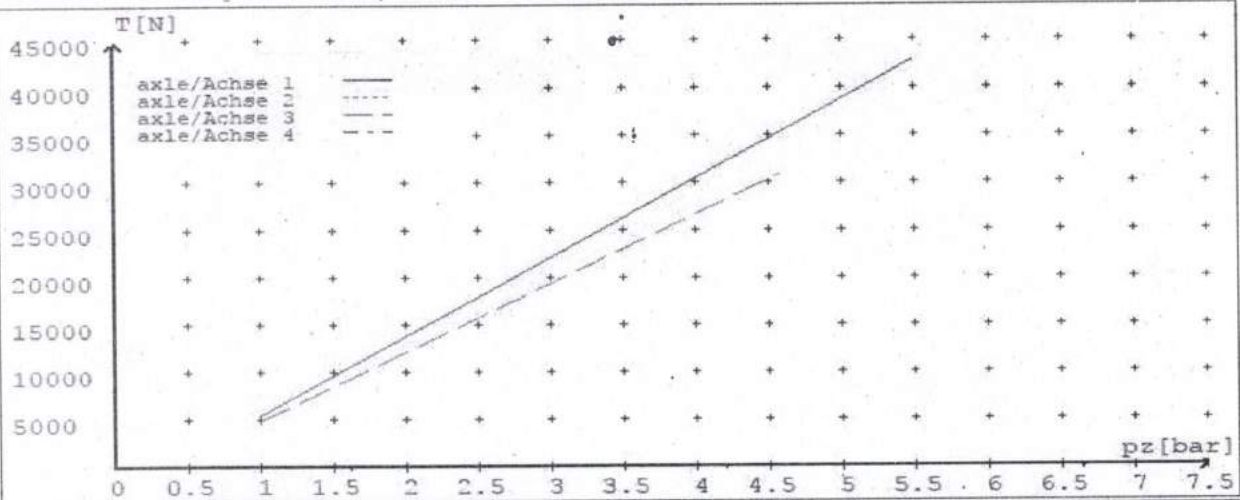

	Axle(s) / Achse(n)				
brake cylinder type (service / parking) Bremszylinder Typ (Betrieb / Fest)	20./	20./	T.16/24	T.16/24	/
Maximum stroke smax = ...mm maximaler Hub smax = ...mm	65	65	64	64	
Lever length = ...mm Hebellänge = ...mm	76	76	76	76	

**GOUGH****Transpecs**

**HEAVY VEHICLE BRAKE RULE  
32015/4 WORKSHEET  
PROCEDURE DOCUMENTATION SHEET- (PDS)  
&  
CONFIRMATION OF COMPLIANCE**

CERTIFICATE NO:

LC180515

CUSTOMER NAME:

DOMETT TRAILERS

CUSTOMER ORDER NO:

5314

DATE RECEIVED:

16/03/2018

VEHICLE TYPE:

FULL TANKER

VIN / CHASSIS NO:

7A9D10014J1023723

**BRIEF SPECIFICATION AS CERTIFIED TO SCHEDULE 5**

BRAKE VALVES:

MAKE

TYPE

PRIMARY RELAY:

WABCO

480 102 064 0

SECONDARY RELAY:

WABCO

480 207 001 0

SPRING BRAKE RELAY:

SEALCO

110701

PARK BRAKE VALVE:

SEALCO

17600B

LOCKED RATIO:

MAKE:

SETTING:

**OTHER VALVES**

OTHER VALVES

MAKE:

TYPE

SETTING

MAKE:

TYPE

SETTING

MAKE:

TYPE

SETTING

MAKE:

TYPE

SETTING

**BRAKE CHAMBERS**

	FRONT	REAR	5TH
MAKE:	HALDEX	BERTOCCO	0
SIZE:	20, 125-200-001	1624	0
STROKE: MM	62mm	57mm	0
SLACK LENGTH: MM	DISC, 76mm	DISC, 76mm	0

**BRAKE CALIPERS**

**BRAKE CALIPERS:**

HALDEX

**FRICITION MATERIAL:**

OEM

Aftermarket

**LINING BRAND**

**LINING BRAND**

**FRONT**

**REAR**

MAT 5200-215

MAT 5200-215

**OTHERS**

**TYRES:**

**FRONT**

**REAR**

265/70R 19.5

265/70R 19.5

**COMMENTS**

EBS, SPECIAL CONDITIONS APPLY. SEE INSTRUCTIONS ON LT400 #

0

---

---

---

---

---

**NOTES:**

---

---

---

PACKING SLIP NO. \_\_\_\_\_

PROCESS TIME \_\_\_\_\_

**CONFIRMATION OF COMPLIANCE**

*I CONFIRM THAT THE VEHICLE IDENTIFIED IN PAGES 1 AND 2 OF THIS CONFIRMATION OF COMPLIANCE COMPLIES WITH ALL RELEVANT REQUIREMENTS OF THE CURRENT NEW ZEALAND HEAVY VEHICLE BRAKE RULE 32015/4, SCHEDULE 5.*

**DATE:** 17/07/2018      **SIGNED:** \_\_\_\_\_

**NAME & ID:** LANCE CAWTE (LPC)

**PHONE (BUS):** 09 980 7300      **FAX (BUS):** 03 3083277

**POSTAL ADDRESS:**      TRANSPORT SPECIALTIES LTD  
PO BOX 98-971,  
MANUKAU CITY,  
AUCKLAND 2241

**POSITION:** Brake certifier HVEK

*I CONFIRM THE BRAKE SYSTEM OF THE VEHICLE IDENTIFIED IN PAGE 1 OF THIS STATEMENT OF COMPLIANCE AS MODIFIED BY MYSELF, CONTINUES TO COMPLY WITH ALL THE RELEVANT REQUIREMENTS OF THE CURRENT NEW ZEALAND HEAVY BRAKE RULE 32015/4 SCHEDULE 5.*

**DATE:** \_\_\_\_\_      **SIGNED:** \_\_\_\_\_

**NAME:** \_\_\_\_\_

**CERTIFIERS ID:** \_\_\_\_\_      **POSITION:** \_\_\_\_\_

**PHONE (BUS):** \_\_\_\_\_      **FAX (BUS):** \_\_\_\_\_

**COMMENTS:** \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_