

Heavy vehicle specialist certificate

Must be presented to a CoF (heavy) inspecting organisation

Heavy vehicle specialist inspector and inspecting organisation

Heavy vehicle specialist inspector's or manufacturing inspecting organisation's name (PRINT IN CAPS)

CHRIS CLARKE

ID

CJC

Vehicle registration (optional)

VIN/chassis number

7A9D10018J1023725

Make

DOMETT

Component being certified:

 Chassis

 Load anchorage

Model (optional):

 Log bolsters

 Towing connection

 Brakes

Certification category

 SRT

 PSV stability

 PSV rollover

HVEK
 Swept path

 PBS

Description of work

**CERTIFY TO HEAVY VEHICLE BRAKE RULE 32015/4.
NEW ZEALAND HEAVY VEHICLE BRAKE SPECIFICATION.**

Code/standard/rule certified to

SCHEDULE 5

Component load rating(s)

GVM 26,000 Kgs

General drawing number(s)

N/A
BRAKES 30,000 Kgs

Supporting documents

BRAKE CODE CERTIFICATE LC180603
SODC LC180603

Special conditions (optional)

**WARNING LAMP MUST ILLUMINATE WHEN IGNITION IS SWITCHED ON & THEN
EXTINGUISH IMMEDIATELY OR WHEN VEHICLE SPEED EXCEEDS 7 KPH**

Certification expiry date (if applicable)

UNTIL MODIFIED or CHANGE OF USE
or


Hubodometer reading (whichever comes first)

Declaration

I the undersigned, declare that I am the heavy vehicle specialist inspector identified and I hold a current valid appointment. I certify that the above mentioned vehicle component's design, manufacture and installation, and this certification complies in all respects with the Land Transport Rule: Vehicle Standards Compliance 2002 and my appointment. To the best of my knowledge the information contained in the certificate is true and correct.

Designer's ID (if different from inspector below)

Inspector's signature

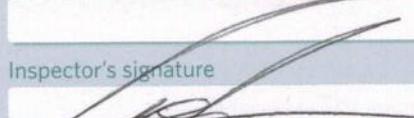

Inspector's name (PRINT IN CAPS)

CHRIS CLARKE

ID number

CJC

Date

25-Jul-18

Number

647175

CoF vehicle inspector ID

CoF vehicle inspector signature

Date

All fields are mandatory unless otherwise stated.

WABCO**START-UP LOG**

System	Trailer EBS-E	WABCO part number	480 102 064 0
Production date	2017-11-17	Serial number	436040820200L
Serial number (modulator)	000000161269		
Fingerprint Customer EOL / Customer Development / Flash Program	W503643 / 2018-07-25 ; 00000000 / 0000-00-00 ; 00000000 / 0000-00-00		

WABCO		TRAILER EBS-E		GGVS/ADR TUEH TB 2007 - 019.00 361-005-16											
HERSTELLER MANUFACTURER CONSTRUCTEUR	DOMETT	GIO	Pin1	Pin3	Pin4										
TYPE TYPE TYPE	4A TANKER, D1001	1	24V-O1	---	---										
VEHICLE IDENT. NUMBER CHASSIS NUMBER NUMERO DE CHASSIS	7A9D10018J1023725	2	---	---	---										
BREMSBERECHNUNGS-NR. BRAKE CALCULATION NO. CALCUL DU FREINAGE NO.	TP2018ROR	3	ALS2	ALS2	---										
POLRADZÄHNEZAHL c-d e-f POLE WHEEL TEETH c-d e-f DENTS ROUE DENTÉE c-d e-f	90	90	ABS-System ABS-System Système ABS	4S/3M	DIAG										
RSS RSS RSS	Einfachbereifung Single Tire Monte simple	X	Lenkachse Steering axle Essieu virant	---	---										
	Zwillingsbereifung Twin Tire Monte jumelle		Kippgefährliches Fahrzeug Critical Trailer Véhicule critique												
Subsystems	SB	I/O	24N												
	pm (bar)	6.5	pm (bar)	0.8	2.0	---	6.5	pz	TYP TYPE	(mm)	(mm)	(bar)			
ACHSE AXLE ESSIEU												1.0	Pz		
1	1400	0.4	1.5	7500	4.4	0.4	1.3	---	5.5	-	20	65	76	539	4277
2	1400	0.4	1.5	7500	4.4	0.4	1.3	---	5.5	-	20	65	76	539	4277
3	1200	0.3	1.2	7500	4.4	0.4	1.5	---	4.6	-	16 / 24	64	76	479	3078
4	1200	0.3	1.2	7500	4.4	0.4	1.5	---	4.6	-	16 / 24	64	76	479	3078
5	0	---	---	0	---	---	---	---	---	-	---	---	---	---	---

TEBS-E

Diagnostic memory	OK	Warning lamp control	OK
Parameter setting	carried out	Stop light supply	OK
EBS pressure test	OK	Lifting axle test	Not tested
Redundancy test	OK	ECAS height sensor calibration	Not tested
ABS sensor assignment	OK	Height sensor axle load	Not tested
RTR test	Not tested	Leak test	Not tested
Immobilizer test	Not tested	Signal outputs	Not tested
Signal inputs	Not tested	Tag axle test	Not tested

Electronic Extension Module

Diagnostic memory	Not tested	Signal outputs	Not tested
TailGUARDlight	Not tested	TailGUARD	Not tested
Manufacturer	DOMETT	Vehicle ident. no	7A9D10018J1023725
Vehicle type	4A TANKER, D1001	Odometer reading	0.0 km
next Service	0 km	Trip reading	0.0 km
Tester	Chris Clarke		
Date	2018-07-25 8:16:31 a.m.	Signature	

distribution: DOMETT
 2018 ROR 4A WPC

please note!

This brake calculation is made under consideration of
 -the legal prescriptions mentioned above in the version valid
 at the time of making the program (V6.14.04.20).
 -the functional characteristics of our products
 as well as the data of the brake out of the test
 approvals of the axle manufacturers, and
 -the other vehicle data included in the brake calculation.
 Please check whether these data correspond to the actual vehicle data.
 Our conditions of delivery apply (particularly section 9.0).
 In any case we commend to do a braking harmonisation!
 WABCOBrake V6.14.04.20 db 20.04.2016

vehicle manufacturer: DOMETT
 trailer model : 4A TANKER, D1001
 trailer type : 4-axle-full-trailer
 remarks : air / hydraulic / VA suspension
 WABCO TRAILER - EBS
 TRISTOP 3+4: T.16/24
 265/70 R 19,5

axle 1 + 2 + 3 + 4 : Assali Stefen, K, 361-005-16,

		<u>unladen</u>	laden
total mass	P in kg	5200	30000
axle 1	P1 in kg	1400	7500
axle 2	P2 in kg	1400	7500
axle 3	P3 in kg	1200	7500
axle 4	P4 in kg	1200	7500
wheel base	E in mm	5070 - 5070	
centre of gravity height	h in mm	900	1538

	no. of combined axles	no. of brake chambers per axle line	KDZ	<u>axle 1</u>	<u>axle 2</u>	<u>axle 3</u>	<u>axle 4</u>
				manually	manually	manually	manually
brake chamber manufacturer				1	1	1	1
chamber size				2	2	2	2
lever length	lbh in mm	BZ 122.1	BZ 122.1	BZ 119.6	BZ 119.6		
brake factor	[-]	Meritor	Meritor	Meritor	Meritor		
dyn. rolling radius	rdyn min in mm	20.	20.	T.16/24	T.16/24		
dyn. rolling radius	rdyn max in mm	76	76	76	76		
threshold torque	Co Nm	22.37	22.37	22.37	22.37		
		421	421	421	421		
		421	421	421	421		
		6.0	6.0	6.0	6.0		

calculation:

chamber pressure(rdyn min)pH at z=22,5%bar	2.1	2.1	2.1	2.1
chamber pressure(rdyn max)pH at z=22,5%bar	2.1	2.1	2.1	2.1
chamber press.(servo)pcha at pm6,5bar bar	5.5	5.5	4.6	4.6
piston force ThA at pm6,5bar N	6332	6332	4555	4555
brake force(rdyn min)T lad. at pm6,5bar N	51239	51239	36884	36884
brake force(rdyn max)T lad. at pm6,5bar N	51239	51239	36884	36884
brake force within 1 % rolling friction proportion	%	26.7	26.7	23.3
				23.3

braking rate z laden
 $z = \sum (TR) / PR_{max}$

0.599 for rdyn min
 0.599 for rdyn max

Trailer may only be operated in combination with trucks/tractors with
 ISO 7638 supply (5 or 7 polar).

brake diagram :

maximum pressure: 8.5 bar

axle 1:

valve 1: 480 207 0.. 0 WABCO or 480 207 2.. 0
EBS relay valve

brake cylinder: Meritor 20HSCLD65

axle 2:

valve 1: 480 207 0.. 0 WABCO or 480 207 2.. 0
EBS relay valve

brake cylinder: Meritor 20HSCLD65

axle 3:

valve 1: 480 102 ... 0 WABCO
EBS trailer modulator







brake cylinder: Meritor 1624HTLD64

axle 4:

valve 1: 480 102 ... 0 WABCO
EBS trailer modulator

brake cylinder: Meritor 1624HTLD64

test type III (zIII = 0.30) for rdyn min : axle1 axle2 axle3 axle4
at pm 3.6 bar => pcha in bar : 2.8 2.8 2.6 2.6
test type III (zIII = 0.06) for rdyn min : axle1 axle2 axle3 axle4
at pm 1.3 bar => pcha in bar : 0.8 0.8 0.9 0.9

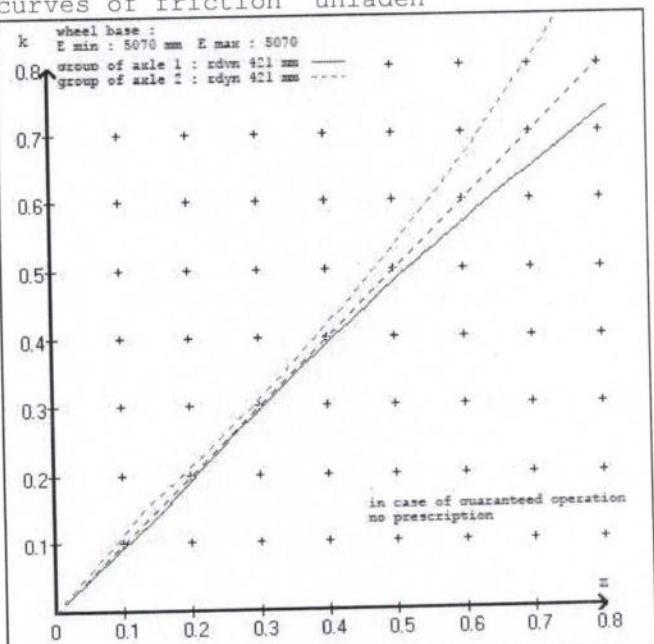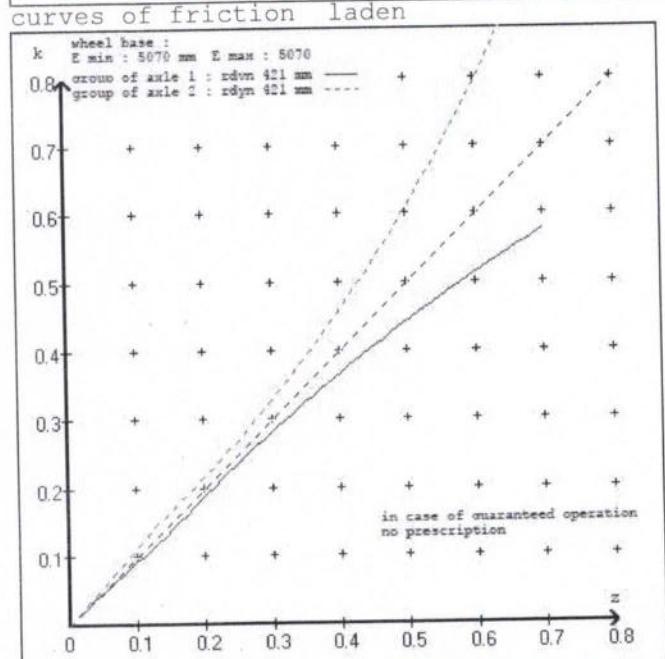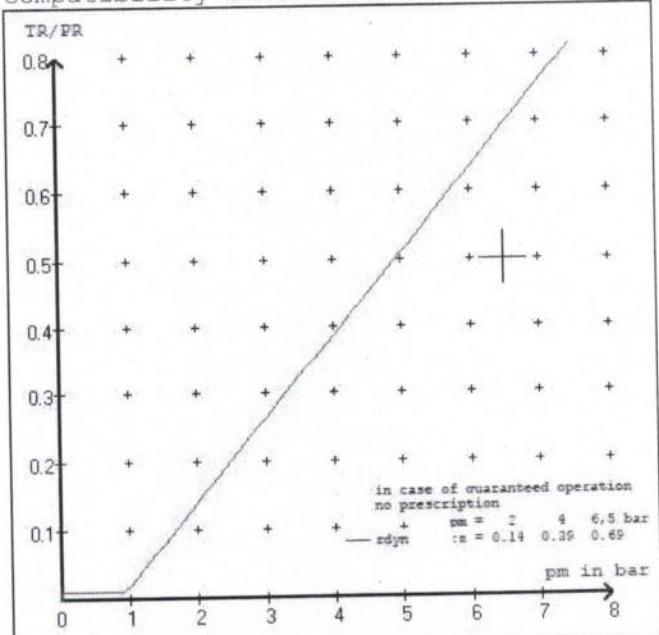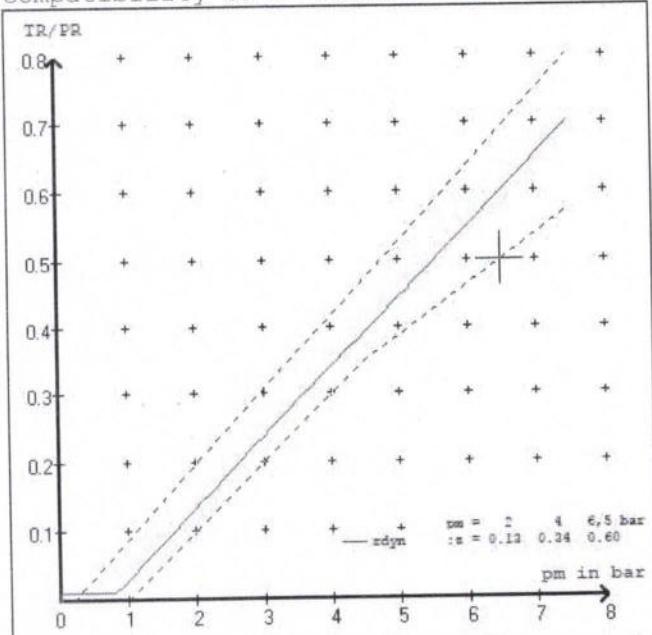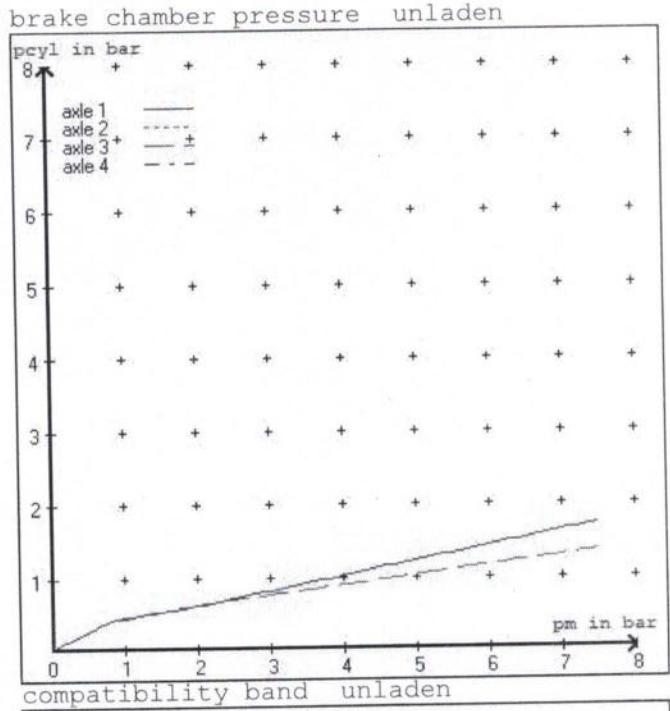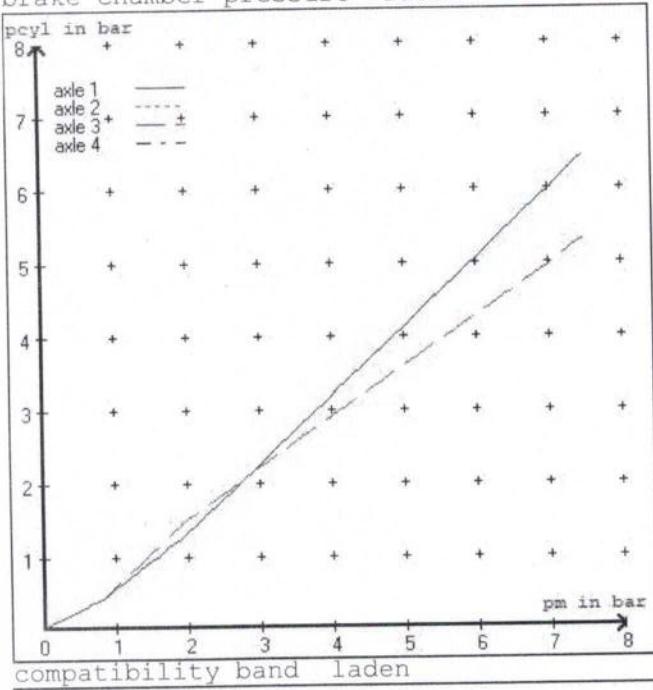

vehicle manufacturer: DOMETT
 trailer model : 4A TANKER, D1001
 trailer type : 4-axle-full-trailer

brake chamber and lever length :

axle 1 :	2 x type/diameter	20.	(Meritor)	lever length 76 mm
axle 2 :	2 x type/diameter	20.	(Meritor)	lever length 76 mm
axle 3 :	2 x type/diameter	T.16/24	(Meritor)	lever length 76 mm
axle 4 :	2 x type/diameter	T.16/24	(Meritor)	lever length 76 mm

brake diagram :

valve :
 480 207 0..0 WABCO EBS relay valve or 480 207 2..0
 480 102 ... 0 WABCO EBS trailer modulator

EBS input data

=====

vehicle manufacturer: DOMETT
 trailer model : 4A TANKER, D1001
 trailer type : 4-axle-full-trailer
 brake calculation no. : TP 2018A

tire circumference main axle	: 2650 for rdyn max
tire circumference auxiliary axle	: 2650 for rdyn max

assignment pm / deceleration z: pm 0.8 bar z = 0.010	
(laden condition)	2.0 bar z = 0.134
	6.5 bar z = 0.600

control pressure pm			6,5	control pressure pm		0.8	2.0	6,5
axle	axle load unladen	bellow pr. unladen	brake pr. unladen	axle load laden	bellow pr. laden	brake pr. laden		
1	1400	to be entered by the vehicle manufact.	1.5	7500	to be entered by the vehicle manufact.	0.4	1.3	5.5
2	1400		1.5	7500		0.4	1.3	5.5
3	1200		1.2	7500		0.4	1.5	4.6
4	1200		1.2	7500		0.4	1.5	4.6
5	0		0,0	0		0,0	0,0	0,0

The unladen values indicated in the above table are values for the basic parameter set. Higher unladen axle loads and liftaxles are automatically recognized and do not require separate adjustment.
 The above unladen axle loads must not be fallen below.

axle 1	axle 2	axle 3	axle 4
axle load pcyl	axle load pcyl	axle load pcyl	axle load pcyl
1400	1.5	1200	1.2
1900	1.8	1700	1.5
2400	2.2	2200	1.7
2900	2.5	2700	2.0
3400	2.8	3200	2.3
3900	3.1	3700	2.5
4400	3.5	4200	2.8
4900	3.8	4700	3.1
7500	5.5	7500	4.6

data sheet to ECE vehicle type-approval certificate concerning braking equipment: according to ECE R13 annex 11

axle 1 : reference axle: Assali StefLM or LC or TMen	brake lining: FER 5200-215
test report : 361-005-16	date : 09-02-2016
axle 2 : reference axle: Assali StefLM or LC or TMen	brake lining: FER 5200-215
test report : 361-005-16	date : 09-02-2016
axle 3 : reference axle: Assali StefLM or LC or TMen	brake lining: FER 5200-215
test report : 361-005-16	date : 09-02-2016
axle 4 : reference axle: Assali StefLM or LC or TMen	brake lining: FER 5200-215
test report : 361-005-16	date : 09-02-2016

calc. verif. of residual (hot) braking force type III

(item 4.2.1 of appendix 2 to annex 11)

axle 1 (rdyn 421 mm)	T = 24.4 % Fe
axle 2 (rdyn 421 mm)	T = 24.4 % Fe
axle 3 (rdyn 421 mm)	T = 19.7 % Fe
axle 4 (rdyn 421 mm)	T = 19.7 % Fe

calculated actuator stroke in mm

(item 4.3.1.1 of appendix 2 to annex 11)

axle 1 (sp = 58 mm)	s = 37 mm
axle 2 (sp = 58 mm)	s = 37 mm
axle 3 (sp = 57 mm)	s = 37 mm
axle 4 (sp = 57 mm)	s = 37 mm

average thrust output in N at pm = 6,5 bar (however max. pcha = 7,0 bar)

axle1	ThA = 6332 N
axle2	ThA = 6332 N
axle3	ThA = 4555 N
axle4	ThA = 4555 N

calc. residual (hot) braking force in N

(item 4.3.1.4 of appendix 2 to annex 11)

axle 1 (rdyn 421 mm)	T = 49452 N
axle 2 (rdyn 421 mm)	T = 49452 N
axle 3 (rdyn 421 mm)	T = 35608 N
axle 4 (rdyn 421 mm)	T = 35608 N

basic test of subject trailer (E)	type III (calculated) residual (hot)braking
---	--

braking rate of the vehicle (item 4.3.2 to appendix 2 to annex 11)	0.60 0.58
---	-----------

required braking rate (items 1.5.3 and 1.7.2 to annex 11)	>= 0,4 and >= 0,6*E (0.36)
--	-------------------------------

axle 1 (rdyn 421 mm)	T = 49452 N
axle 2 (rdyn 421 mm)	T = 49452 N
axle 3 (rdyn 421 mm)	T = 35608 N
axle 4 (rdyn 421 mm)	T = 35608 N

basic test of subject trailer (E)	type III (calculated) residual (hot)braking
---	--

braking rate of the vehicle (item 4.3.2 to appendix 2 to annex 11)	0.60 0.58
---	-----------

required braking rate (items 1.5.3 and 1.7.2 to annex 11)	>= 0,4 and >= 0,6*E (0.36)
--	-------------------------------

		axle 3	axle 4
no of TRISTOP-actuators per axle line KDZ		2	2
TRISTOP-actuator type		T.16/24	T.16/24
lever length	1Bh in mm	76	76
stat. tyre radius	rstat max in mm	401	401
at a stroke of	s in mm	30	30
min. force of spring brake	TFZ in N	7605	7605
sp.brake chamber no Meritor.....		4	4
release pressure	pLs in bar	4.8	4.8

calculation:

ratio until road		4.2397	4.2397
iFb = 1Bh*Eta*C*rBt/(rBn*rstat)			
for rstat in mm		401	401
brake force of spring br. Tf in N		63816	63816
Tf = (TFZ*KDZ-2*Co/1Bh)*iFb			
braking rate	zf laden	0.444	
zf = sum (Tf)/P + 0,01			

Test of the frictional connection required by the parking brake

minimum wheelbase/minimum supporting width min Ef necessary to fulfil the regulations

$$\text{min Ef} = E * (1 - PR/P + zferf * h/E) / (1 - zferf / (fzul * nf/ng))$$

$$\begin{aligned} \text{min Ef} &= 3628 \text{ mm} \quad \text{for } E = 5070 \text{ mm} \\ \hline \text{min Ef} &= 3628 \text{ mm} \quad \text{for } E = 5070 \text{ mm} \end{aligned}$$

min Ef =	minimum distance between front axle(s) (trailer) or support (semitrailer)
and the rear axle(s) (resultant of the bogie)	
E =	wheel base
fzul = 0.80	maximum permissible frictional connection required
zferf = 0.18	maximum required braking ratio of the parking brake
h = 1538 mm	height of center of gravity - laden
PR = 15000 kg	maximum bogie mass - laden
P = 30000 kg	maximum total mass - laden
nf = 2	no. of axle(s) with TRISTOP spring brake actuators
ng = 2	no. of bogie axle(s)

axle manufacturer
type of brake
type of axle

axle 1 + 2 + 3 + 4
Assali Stefen
K
LM or LC or TM
361-005-16

test report of characteristic value

adm. stat. axle load
tested axle load
max. adm. tyre radius
adm. cam. torque (6,5 bar)
lining area per brake
no. of brake cylinder
brakefactor (SB) Bf
brakefactor (PB) Bf
threshold torque (Co,dec)

Pstat	in kg	11000
Pe	in kg	10200
Rezul	in mm	999
Czul	in Nm	940
AB	in cm ²	304
-	-	2
-	-	22.37
-	-	22.37
Mo	in Nm	6

date
brake lining
cam torque
brake force
stroke
tested tyre radius
tested lever length
threshold torque (Co,e)

09-02-2016		
FER 5200-215		
Ce	in Nm	638
TeIII	in daN	5366
seIII	in mm	37
Re	in mm	518
le	in mm	76
	in Nm	6


reference values

reference values for z = 50% for max rdyn: 421 mm

	pz [bar]	T [N]	T [N]
axle 1	1.0	5394	
	5.5	42770	
axle 2	1.0	5394	
	5.5	42770	
axle 3	1.0		4794
	4.6		30788
axle 4	1.0		4794
	4.6		30788

VIN - no.:

	Axe(s) / Achse(n)				
brake cylinder type (service / parking) Bremszylinder Typ (Betrieb / Fest)	20./	20./	T.16/24	T.16/24	/
Maximum stroke smax =mm maximaler Hub smax =mm	65	65	64	64	
Lever length =mm Hebellänge =mm	76	76	76	76	

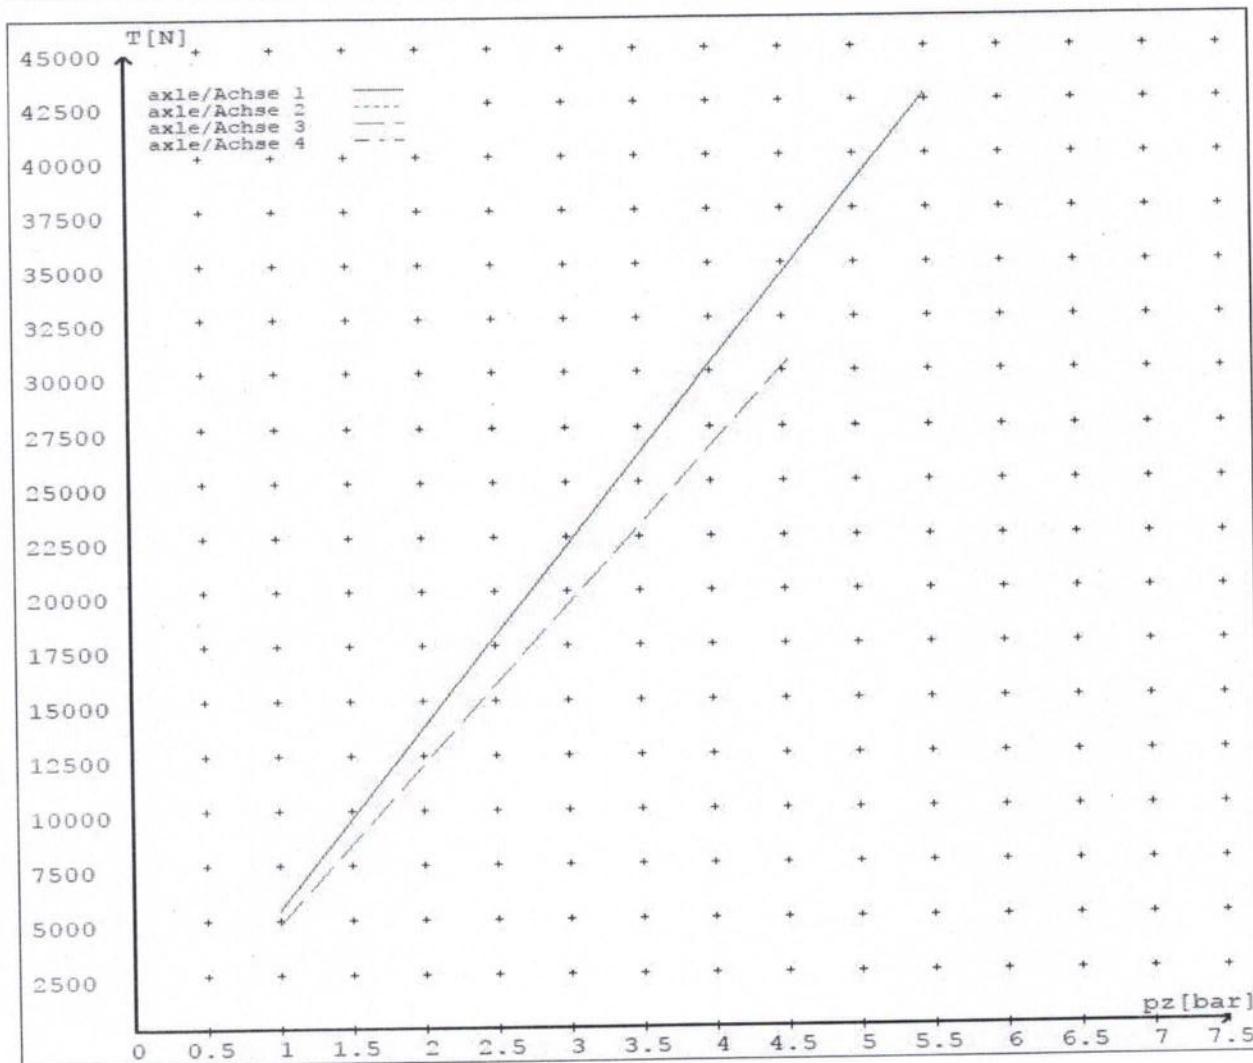

reference values for z = 0.5


Angabe der Referenzwerte für z = 0.5

brake calculation no: TP 2018A date 20.03.2018

Bremsberechnung Nr: TP 2018A vom 20.03.2018

for max rdyn: 421 mm

für max rdyn: 421 mm

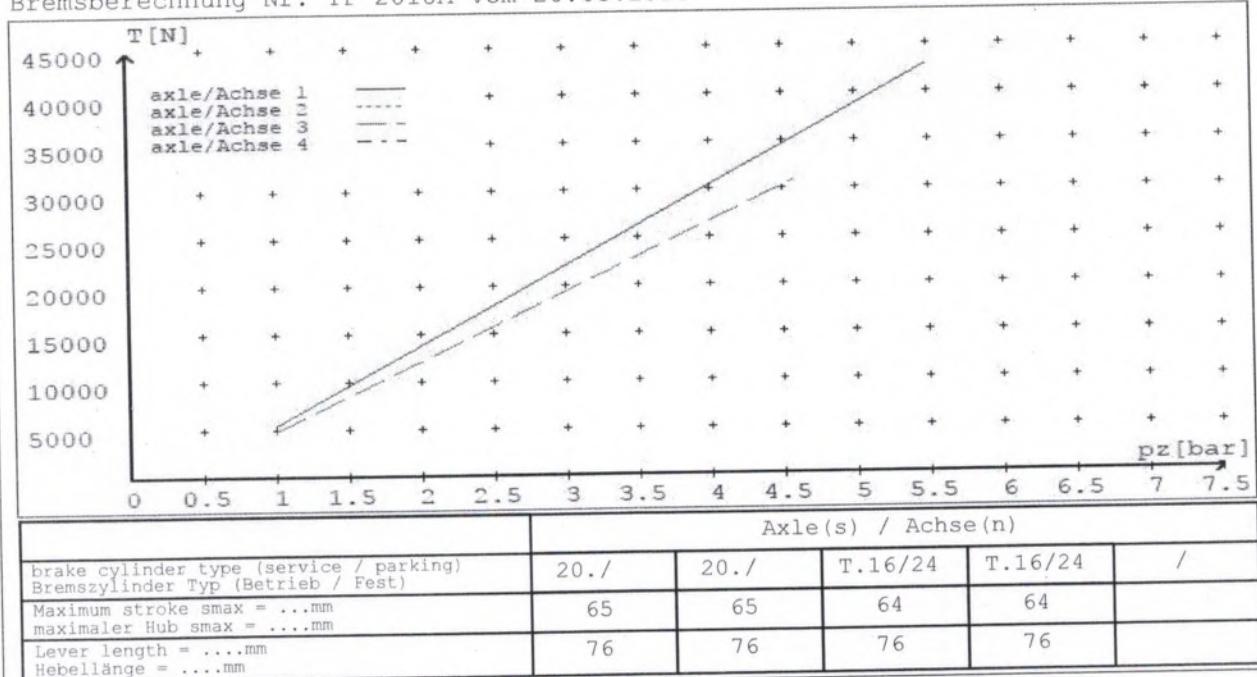

**HEAVY VEHICLE BRAKE RULE
32015/4 WORKSHEET
PROCEDURE DOCUMENTATION SHEET- (PDS)**
&
CONFIRMATION OF COMPLIANCE

CERTIFICATE NO:

LC180603

CUSTOMER NAME:

DOMETT TRAILERS

CUSTOMER ORDER NO:

5316

DATE RECEIVED:

16/03/2018

VEHICLE TYPE:

FULL TANKER

VIN / CHASSIS NO:

7A9D10018J1023725

BRIEF SPECIFICATION AS CERTIFIED TO SCHEDULE 5

BRAKE VALVES:	MAKE	TYPE
PRIMARY RELAY:	WABCO	480 102 064 0
SECONDARY RELAY:	WABCO	480 207 001 0
SPRING BRAKE RELAY:	SEALCO	110701
PARK BRAKE VALVE:	SEALCO	17600B

LOCKED RATIO:

MAKE:

SETTING:

OTHER VALVES**OTHER VALVES**

MAKE:	<input type="text"/>	TYPE	<input type="text"/>	SETTING	<input type="text"/>
MAKE:	<input type="text"/>	TYPE	<input type="text"/>	SETTING	<input type="text"/>
MAKE:	<input type="text"/>	TYPE	<input type="text"/>	SETTING	<input type="text"/>
MAKE:	<input type="text"/>	TYPE	<input type="text"/>	SETTING	<input type="text"/>

BRAKE CHAMBERS

	FRONT	REAR	5TH
MAKE:	HALDEX	BERTOCCO	0
SIZE:	20, 125-200-001	1624	0
STROKE: MM	62mm	57mm	0
SLACK LENGTH: MM	DISC, 76mm	DISC, 76mm	0

BRAKE CALIPERS**BRAKE CALIPERS:**

HALDEX

FRICITION MATERIAL: OEM Aftermarket**LINING BRAND****LINING BRAND****FRONT** **REAR**

MAT 5200-215

MAT 5200-215

OTHERS**TYRES:****FRONT****REAR**

265/70R 19.5

265/70R 19.5

COMMENTS

EBS, SPECIAL CONDITIONS APPLY. SEE INSTRUCTIONS ON LT400 #

0


NOTES:

PACKING SLIP NO. _____ PROCESS TIME _____

CONFIRMATION OF COMPLIANCE

I CONFIRM THAT THE VEHICLE IDENTIFIED IN PAGES 1 AND 2 OF THIS CONFIRMATION OF COMPLIANCE COMPLIES WITH ALL RELEVANT REQUIREMENTS OF THE CURRENT NEW ZEALAND HEAVY VEHICLE BRAKE RULE 32015/4, SCHEDULE 5.

DATE: 25/07/2018

SIGNED: 

NAME & ID:

LANCE CAWTE (LPC)

PHONE (BUS): 09 980 7300 FAX (BUS): 03 3083277

POSTAL ADDRESS:

TRANSPORT SPECIALTIES LTD
PO BOX 98-971,
MANUKAU CITY,
AUCKLAND 2241

POSITION: Brake certifier HVEK

I CONFIRM THE BRAKE SYSTEM OF THE VEHICLE IDENTIFIED IN PAGE 1 OF THIS STATEMENT OF COMPLIANCE AS MODIFIED BY MYSELF, CONTINUES TO COMPLY WITH ALL THE RELEVANT REQUIREMENTS OF THE CURRENT NEW ZEALAND HEAVY BRAKE RULE 32015/4 SCHEDULE 5.

DATE: _____ SIGNED: _____

NAME: _____

CERTIFIERS ID: _____ POSITION: _____

PHONE (BUS): _____ FAX (BUS): _____

COMMENTS: _____

