

Heavy vehicle specialist inspector's or manufacturing inspecting organisation's name (PRINT IN CAPS)

CHRIS CLARKE

ID

CJC

Vehicle registration (optional)

VIN/chassis number

7 A 9 E 2 5 0 1 4 J 1 0 2 3 7 8 4

Make

DOMETT TRAILERS

Model (optional)

Certification category

HVEK

Component being certified:

 Chassis

 Load anchorage

 Log bolsters

 Towing connection

 Brakes

 SRT

 PSV stability

 PSV rollover

 Swept path

 PBS

Description of work

CERTIFY TO SCHEDULE 5 OF LTR 32015/4

RSS ON: TWIN TYRES / SUPER-SINGLES

SIZE = 265 70 R 19.5

Code/standard/rule certified to

LTR 32015/4

Component load rating(s)

32 Tonnes GVM

General drawing number(s)

N/A

35 Tonnes (Group ratings)

Supporting documents

BRAKE CODE CERTIFICATE JH181036

BRAKE CALCULATION # TP51747

Special conditions (optional)

 WARNING LAMP MUST ILLUMINATE WHEN IGNITION IS SWITCHED ON & THEN  
EXTINGUISH IMMEDIATELY OR WHEN VEHICLE SPEED EXCEEDS 7 KPH

Certification expiry date (if applicable)

N/A [UNLESS MODIFIED]

or

Hubodometer reading (whichever comes first)

### Declaration

I the undersigned, declare that I am the heavy vehicle specialist inspector identified and I hold a current valid appointment. I certify that the above mentioned vehicle component's design, manufacture and installation, and this certification complies in all respects with the Land Transport Rule: Vehicle Standards Compliance 2002 and my appointment. To the best of my knowledge the information contained in the certificate is true and correct.

Designer's ID (if different from inspector below)

Inspector's signature

Inspector's name (PRINT IN CAPS)

ID number

Date

23-Oct-18

Number

655449

CoF vehicle inspector ID (if applicable)

CoF vehicle inspector signature (if applicable)

Date

All fields are mandatory unless otherwise stated.



**WABCO****START-UP LOG**

|   |  |                          |               |
|---|--|--------------------------|---------------|
| <b>System</b>   | Trailer EBS-E  | <b>WABCO part number</b> | 480 102 084 0 |
| <b>Production date</b>  | 2018-04-10   | <b>Serial number</b>     | 437005356600E |
| <b>Serial number (modulator)</b>                                | 000000505781   |                          |               |
| Fingerprint Customer EOL / Customer Development / Flash Program | W503643 / 2018-10-23 ; 00000000 / 0000-00-00 ; 00000000 / 0000-00-00 |                          |               |

**WABCO****TRAILER EBS-E**

GGVS/ADR TUEH TB 2007 - 019.00


TDB0749
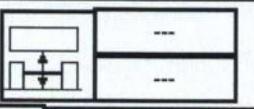
| HERSTELLER<br>MANUFACTURER<br>CONSTRUCTEUR  |  | DOMETT TRAILERS   |      |   | GIO  |      | Pin1   | Pin3 | Pin4  |       |      |     |         |    |    |     |      |
|---|--|-------------------|------|---|--|------|--------|------|---|-------|------|-----|---------|----|----|-----|------|
| TYPE<br>TYPE<br>TYPE  |  | 5AFT STOCK        |      |   | 1  |      | 24V-O1 | ---  | ---   |       |      |     |         |    |    |     |      |
| VEHICLE IDENT. NUMBER<br>CHASSIS NUMBER<br>NUMERO DE CHASSIS  |  | 7A9E25014J1023784 |      |   | 2  |      | ---    | ---  | ---   |       |      |     |         |    |    |     |      |
| BREMSEBERECHNUNGS-NR.<br>BRAKE CALCULATION NO.<br>CALCUL DE FREINAGE NO.  |  | TP51747A          |      |   | 3  |      | ALS2   | ALS2 | ---   |       |      |     |         |    |    |     |      |
| POLRADZAHNEZAHL c-d   e-f<br>POLE WHEEL TEETH c-d   e-f<br>DENTS ROUE DENTÉE c-d   e-f  |  | 90                | 90   | ABS-System<br>ABS-System<br>Système ABS                           | 4  |      | ---    | ---  | ---   |       |      |     |         |    |    |     |      |
| RSS   | Einfachbereifung<br>Single Tire<br>Monte simple  |                   |      | Lenkachse<br>Steering axle<br>Essieu virant                       | 5  |      | DIAG   | DIAG | DIAG  |       |      |     |         |    |    |     |      |
| RSS   | Zwillingsbereifung<br>Twin Tire<br>Monte jumelée | X                 |      | Kippkrritisches Fahrzeug<br>Critical Trailer<br>Véhicule critique | 6  |      | ---    | ---  | ---   |       |      |     |         |    |    |     |      |
| RSS   |  |                   |      |   | 7  |      | ---    | ---  | ---   |       |      |     |         |    |    |     |      |
| Subsystems  |  | SB                | I/O  | 24N   |   |      |        |      |   |       |      |     |         |    |    |     |      |
|       |  | pm (bar)          | 6.5  | pm (bar)  | 0.8  | 2.0  | ---    | 6.5  |   | (bar) |      |     |         |    |    |     |      |
|       |  |                   |      |   |  |      |        | pz   | TYP<br>TYPE   | (mm)  | (mm) | 1.0 | Pz      |    |    |     |      |
|       |  | 1                 | 2550 | 1.3   | 2.6  | 8000 | 5.1    | 0.4  | 1.4   | ---   | 6.5  | -   | 20      | 65 | 69 | 506 | 4774 |
|     |  | 2                 | 2550 | 1.3   | 2.6  | 8000 | 5.1    | 0.4  | 1.4   | ---   | 6.5  | -   | 20      | 65 | 69 | 506 | 4774 |
|   |  | 3                 | 2100 | 1.0   | 1.8  | 6400 | 4.0    | 0.3  | 1.4   | ---   | 4.3  | -   | 14 / 16 | 64 | 69 | 487 | 2570 |
|   |  | 4                 | 2100 | 1.0   | 1.8  | 6400 | 4.0    | 0.3  | 1.4   | ---   | 4.3  | -   | 14 / 16 | 64 | 69 | 487 | 2570 |
|   |  | 5                 | 2100 | 1.0   | 1.8  | 6400 | 4.0    | 0.3  | 1.4   | ---   | 4.3  | -   | 14      | 64 | 69 | 487 | 2570 |

**TEBS-E**

|                              |             |                                       |            |
|------------------------------|-------------|---------------------------------------|------------|
| <b>Diagnostic memory</b>     | OK          | <b>Warning lamp control</b>           | OK         |
| <b>Parameter setting</b>     | carried out | <b>Stop light supply</b>              | OK         |
| <b>EBS pressure test</b>     | OK          | <b>Lifting axle test</b>              | Not tested |
| <b>Redundancy test</b>       | OK          | <b>ECAS height sensor calibration</b> | Not tested |
| <b>ABS sensor assignment</b> | OK          | <b>Height sensor axle load</b>        | Not tested |
| <b>RTR test</b>              | Not tested  | <b>Leak test</b>                      | Not tested |
| <b>Immobilizer test</b>      | Not tested  | <b>Signal outputs</b>                 | Not tested |
| <b>Signal inputs</b>         | Not tested  | <b>Tag axle test</b>                  | Not tested |

**Electronic Extension Module**
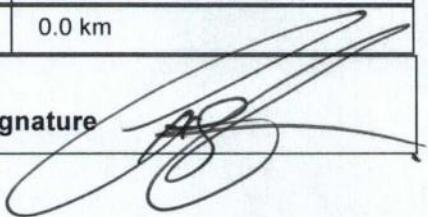
|                          |                          |                          |   |
|--------------------------|--------------------------|--------------------------|---|
| <b>Diagnostic memory</b> | Not tested               | <b>Signal outputs</b>    | Not tested  |
| <b>TailGUARDlight</b>    | Not tested               | <b>TailGUARD</b>         | Not tested  |
| <b>Manufacturer</b>      | DOMETT TRAILERS          | <b>Vehicle ident. no</b> | 7A9E25014J1023784   |
| <b>Vehicle type</b>      | 5AFT STOCK               | <b>Odometer reading</b>  | 0.0 km  |
| <b>next Service</b>      | 0 km                     | <b>Trip reading</b>      | 0.0 km  |
| <b>Tester</b>            | Chris Clarke             |                          |   |
| <b>Date</b>              | 2018-10-23 10:16:11 a.m. | <b>Signature</b>         |  |

trailer (full, semi-, centre-axle) with air brake system acc. to UN/ECE-R.13.11

distribution: DOMETT TRAILERS  
 7A9E25014J1023784  
 SODC: JH181036  
 LT400: CJC 655449

please note!

This brake calculation is made under consideration of:  
 -the legal prescriptions mentioned above in the version valid  
 at the time of making the program (V6.14.04.20).  
 -the functional characteristics of our products  
 as well as the data of the brake out of the test  
 approvals of the axle manufacturers, and  
 -the other vehicle data included in the brake calculation.  
 Please check whether these data correspond to the actual vehicle data.  
 Our conditions of delivery apply (particularly section 9.0).  
 In any case we recommend to do a braking harmonisation!  
 WABCOBrake V6.14.04.20 db 03.11.2017

vehicle manufacturer: DOMETT TRAILERS  
 trailer model : 5AFT STOCK  
 trailer type : 5-axle-full-trailer  
 remarks : air / hydraulic / VA suspension  
 WABCO TRAILER - EBS E  
 TRISTOP 3+4: T.14/24 [TSE1416HTLD64 ACTUALLY USED  
 -SEE PAGE 7 FOR PERFORMANCE DATA]  
 265/70 R 19,5

axle 1 + 2 + 3 + 4 + 5 : SAF, SBW 1937, TDB 0749 ECE,

|                          |          | <u>unladen</u> | <u>laden</u> |
|--------------------------|----------|----------------|--------------|
| total mass               | P in kg  | 11400          | 35200        |
| axle 1                   | P1 in kg | 2550           | 8000         |
| axle 2                   | P2 in kg | 2550           | 8000         |
| axle 3                   | P3 in kg | 2100           | 6400         |
| axle 4                   | P4 in kg | 2100           | 6400         |
| axle 5                   | P5 in kg | 2100           | 6400         |
| wheel base               | E in mm  | 6000 - 6500    |              |
| centre of gravity height | h in mm  | 1050           | 2200         |

|                                     |                | <u>axle 1</u> | <u>axle 2</u> | <u>axle 3</u> | <u>axle 4</u> | <u>axle 5</u> |
|-------------------------------------|----------------|---------------|---------------|---------------|---------------|---------------|
| no. of combined axles               |                | 1             | 1             | 1             | 1             | 1             |
| no. of brake chambers per axle line | KDZ            | 2             | 2             | 2             | 2             | 2             |
| The power output corresponds to     |                | BZ 122.1      | BZ 122.1      | BZ 119.6      | BZ 119.6      | BZ 122.1      |
| brake chamber manufacturer          |                | Meritor       | Meritor       | Meritor       | Meritor       | Meritor       |
| chamber size                        |                | 20.           | 20.           | T.14/24       | T.14/24       | 14.           |
| lever length                        | LBh in mm      | 69            | 69            | 69            | 69            | 69            |
| brake factor                        | [-]            | 23.03         | 23.03         | 23.03         | 23.03         | 23.03         |
| dyn. rolling radius                 | rdyn min in mm | 421           | 421           | 421           | 421           | 421           |
| dyn. rolling radius                 | rdyn max in mm | 421           | 421           | 421           | 421           | 421           |
| threshold torque                    | Co Nm          | 6.0           | 6.0           | 6.0           | 6.0           | 6.0           |

## calculation:

|  |       |       |       |       |       |
|--|-------|-------|-------|-------|-------|
| chamber pressure(rdyn min)pH at z=22,5%bar         | 2.4   | 2.4   | 2.0   | 2.0   | 2.0   |
| chamber pressure(rdyn max)pH at z=22,5%bar         | 2.4   | 2.4   | 2.0   | 2.0   | 2.0   |
| chamber press.(servo)pcha at pm6,5bar bar          | 6.5   | 6.5   | 4.3   | 4.3   | 4.3   |
| piston force ThA at pm6,5bar N                     | 7564  | 7564  | 4085  | 4085  | 4085  |
| brake force(rdyn min)T lad. at pm6,5bar N          | 57295 | 57295 | 30842 | 30842 | 30842 |
| brake force(rdyn max)T lad. at pm6,5bar N          | 57295 | 57295 | 30842 | 30842 | 30842 |
| brake force within 1 % rolling friction proportion | %     | 22.3  | 22.3  | 18.5  | 18.5  |
|  |       |       |       |       |       |

|                      |       |              |
|----------------------|-------|--------------|
| braking rate z laden | 0.600 | for rdyn min |
| z = sum (TR)/PRmax   | 0.600 | for rdyn max |

Trailer may only be operated in combination with trucks/tractors with ISO 7638 supply (5 or 7 polar).

brake diagram :

maximum pressure: 8.5 bar

axle 1:

valve 1: ~~971 002 ... 0~~ WABCO  
~~EBS emergency valve~~

valve 2: 480 207 0.. 0 WABCO or 480 207 2.. 0  
EBS relay valve

brake cylinder: Meritor 20HSCLD65

axle 2:

valve 1: ~~971 002 ... 0~~ WABCO  
~~EBS emergency valve~~

valve 2: 480 207 0.. 0 WABCO or 480 207 2.. 0  
EBS relay valve

brake cylinder: Meritor 20HSCLD65

axle 3:

valve 1: ~~971 002 ... 0~~ WABCO  
~~EBS emergency valve~~

valve 2: 480 102 ... 0 WABCO  
EBS trailer modulator

brake cylinder: Meritor 1424HTLD64

axle 4:

valve 1: ~~971 002 ... 0~~ WABCO

~~EBS emergency valve~~

valve 2: 480 102 ... 0 WABCO

EBS trailer modulator

brake cylinder: Meritor 1424HTLD64

axle 5:

valve 1: ~~971 002 ... 0~~ WABCO

~~EBS emergency valve~~


valve 2: 480 102 ... 0 WABCO

EBS trailer modulator






brake cylinder: Meritor 14HSCLD64

test type III (zIII = 0.30) for rdyn min : axle1 axle2 axle3 axle4 axle5  
at pm 3.6 bar => pcha in bar : 3.2 3.2 2.4 2.4 2.4  
test type III (zIII = 0.06) for rdyn min : axle1 axle2 axle3 axle4 axle5  
at pm 1.3 bar => pcha in bar : 0.8 0.8 0.8 0.8 0.8

## brake chamber pressure laden

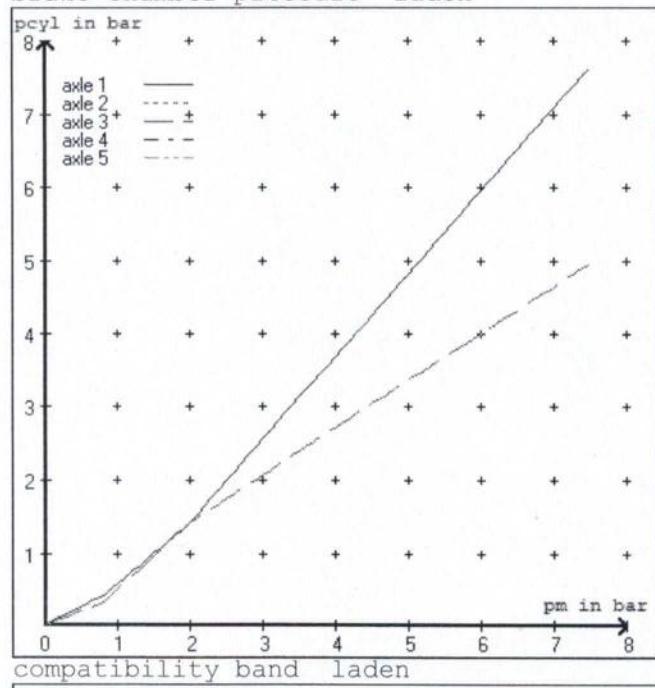

## brake chamber pressure unladen

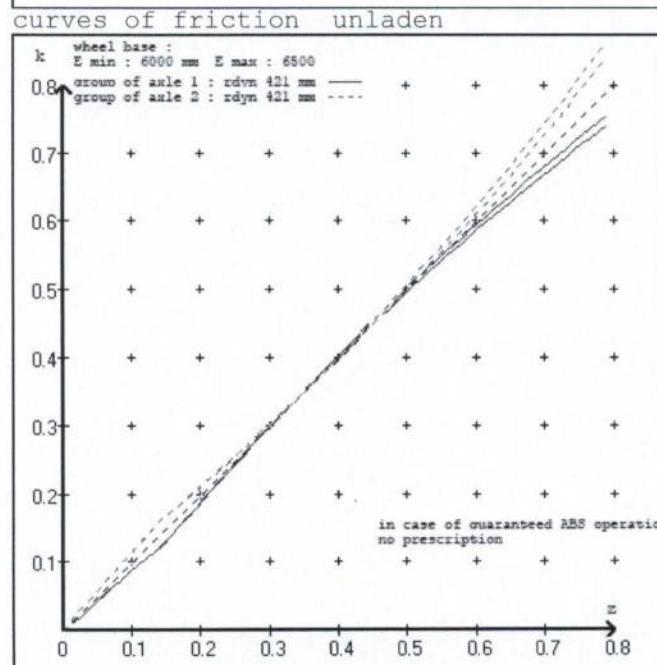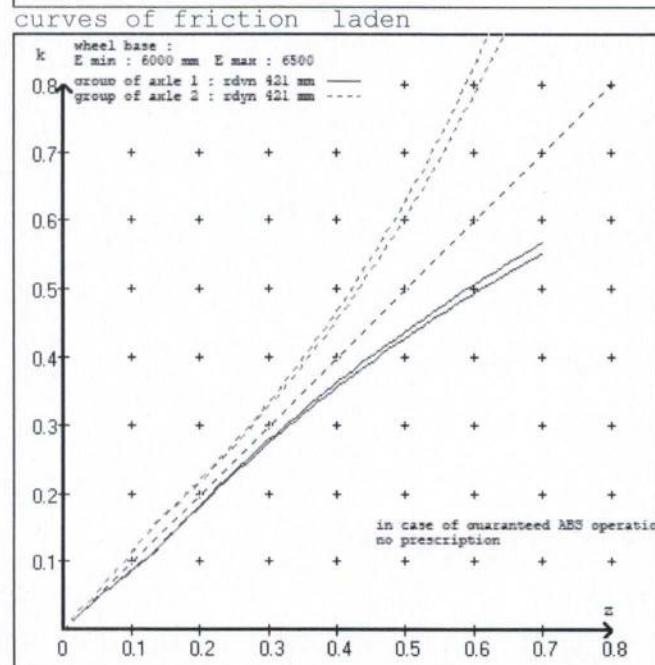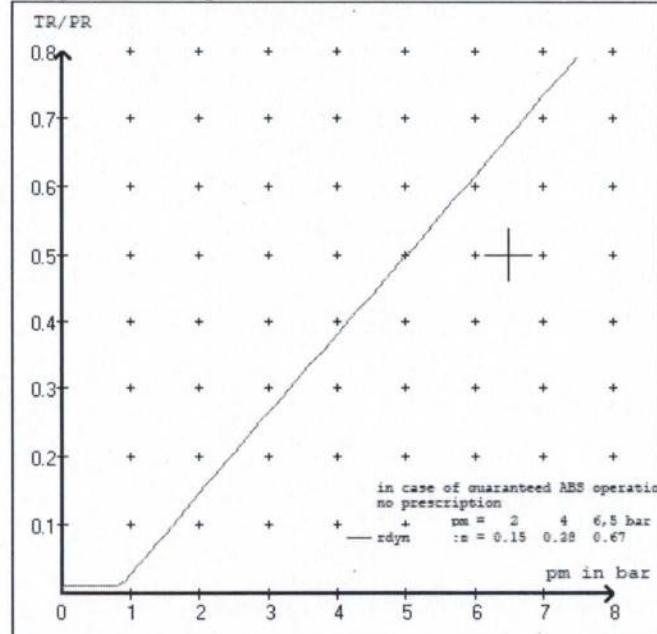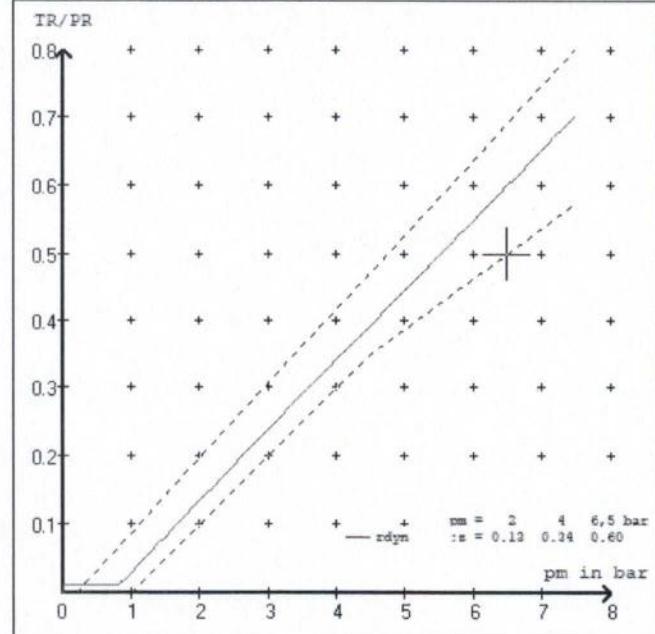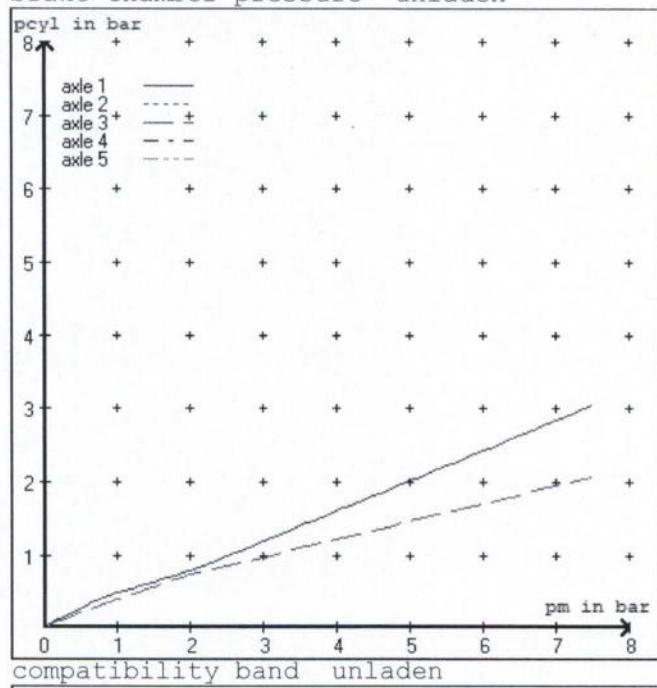

vehicle manufacturer: DOMETT TRAILERS  
 trailer model : 5AFT STOCK  
 trailer type : 5-axle-full-trailer

brake chamber and lever length :

|          |                   |         |           |                    |
|----------|-------------------|---------|-----------|--------------------|
| axle 1 : | 2 x type/diameter | 20.     | (Meritor) | lever length 69 mm |
| axle 2 : | 2 x type/diameter | 20.     | (Meritor) | lever length 69 mm |
| axle 3 : | 2 x type/diameter | T.14/24 | (Meritor) | lever length 69 mm |
| axle 4 : | 2 x type/diameter | T.14/24 | (Meritor) | lever length 69 mm |
| axle 5 : | 2 x type/diameter | 14.     | (Meritor) | lever length 69 mm |

brake diagram :

valve :

|               |                             |                  |
|---------------|-----------------------------|------------------|
| 971 002 ... 0 | WABCO EBS emergency valve   |                  |
| 480 207 0.. 0 | WABCO EBS relay valve       | or 480 207 2.. 0 |
| 480 102 ... 0 | WABCO EBS trailer modulator |                  |

EBS input data

=====

vehicle manufacturer: DOMETT TRAILERS  
 trailer model : 5AFT STOCK  
 trailer type : 5-axle-full-trailer  
 brake calculation no. : TP 51747A

tire circumference main axle : 2650 for rdyn max  
 tire circumference auxiliary axle : 2650 for rdyn max

assignment pm / deceleration z: pm 0.8 bar z = 0.010  
 (laden condition) 2.0 bar z = 0.134  
 6.5 bar z = 0.600

| axle | axle load<br>unladen | bellow pr.<br>unladen                           | control pressure pm  | 6,5                | control pressure pm                             | bellow pr.<br>laden                             | 0.8   | 2.0 | 6.5 |
|------|----------------------|---|----------------------|--------------------|---|---|---|-----|-----|
|      |                      |   | brake pr.<br>unladen | axle load<br>laden | to be<br>entered by<br>the vehicle<br>manufact. |   | to be<br>entered by<br>the vehicle<br>manufact. | 0.4 | 1.4 |
| 1    | 2550                 | to be<br>entered by<br>the vehicle<br>manufact. | 2.6                  | 8000               |   | to be<br>entered by<br>the vehicle<br>manufact. | 0.4   | 1.4 | 6.5 |
| 2    | 2550                 |   | 2.6                  | 8000               |   |   | 0.4   | 1.4 | 6.5 |
| 3    | 2100                 |   | 1.8                  | 6400               |   |   | 0.3   | 1.4 | 4.3 |
| 4    | 2100                 |   | 1.8                  | 6400               |   |   | 0.3   | 1.4 | 4.3 |
| 5    | 2100                 |   | 1.8                  | 6400               |   |   | 0.3   | 1.4 | 4.3 |

The unladen values indicated in the above table are values for the basic parameter set. Higher unladen axle loads and liftaxles are automatically recognized and do not require separate adjustment. The above unladen axle loads must not be fallen below.

| axle 1         | axle 2         | axle 3         | axle 4         | axle 5         |
|----------------|----------------|----------------|----------------|----------------|
| axle load pcyl |
| 2550           | 2.6            | 2100           | 1.8            | 2100           |
| 3050           | 3.0            | 2600           | 2.1            | 2600           |
| 3550           | 3.3            | 3100           | 2.4            | 3100           |
| 4050           | 3.7            | 3600           | 2.7            | 3600           |
| 4550           | 4.0            | 4100           | 3.0            | 4100           |
| 5050           | 4.4            | 4600           | 3.3            | 4600           |
| 5550           | 4.7            | 5100           | 3.5            | 5100           |
| 6050           | 5.1            | 5600           | 3.8            | 5600           |
| 8000           | 6.5            | 6400           | 4.3            | 6400           |

data sheet to ECE vehicle type-approval certificate concerning braking equipment: according to ECE R13 annex 11

|                              |              |                            |
|------------------------------|--------------|----------------------------|
| axle 1 : reference axle: SAF | SBW 1937     | brake lining: Jurid 539    |
| test report :                | TDB 0749 ECE | date : 20130930 30.09.2013 |
| axle 2 : reference axle: SAF | SBW 1937     | brake lining: Jurid 539    |
| test report :                | TDB 0749 ECE | date : 20130930 30.09.2013 |
| axle 3 : reference axle: SAF | SBW 1937     | brake lining: Jurid 539    |
| test report :                | TDB 0749 ECE | date : 20130930 30.09.2013 |
| axle 4 : reference axle: SAF | SBW 1937     | brake lining: Jurid 539    |
| test report :                | TDB 0749 ECE | date : 20130930 30.09.2013 |
| axle 5 : reference axle: SAF | SBW 1937     | brake lining: Jurid 539    |
| test report :                | TDB 0749 ECE | date : 20130930 30.09.2013 |

calc. verif. of residual (hot) braking force type III  
(item 4.2.1 of appendix 2 to annex 11)

|        |               |               |
|--------|---------------|---------------|
| axle 1 | (rdyn 421 mm) | T = 26.7 % Fe |
| axle 2 | (rdyn 421 mm) | T = 26.7 % Fe |
| axle 3 | (rdyn 421 mm) | T = 16.7 % Fe |
| axle 4 | (rdyn 421 mm) | T = 16.7 % Fe |
| axle 5 | (rdyn 421 mm) | T = 16.7 % Fe |

calculated actuator stroke in mm

(item 4.3.1.1 of appendix 2 to annex 11)

|        |              |           |
|--------|--------------|-----------|
| axle 1 | (sp = 58 mm) | s = 39 mm |
| axle 2 | (sp = 58 mm) | s = 39 mm |
| axle 3 | (sp = 56 mm) | s = 39 mm |
| axle 4 | (sp = 56 mm) | s = 39 mm |
| axle 5 | (sp = 56 mm) | s = 39 mm |

average thrust output in N at pm = 6,5 bar (however max. pcha = 7,0 bar)

|       |              |
|-------|--------------|
| axle1 | ThA = 7564 N |
| axle2 | ThA = 7564 N |
| axle3 | ThA = 4085 N |
| axle4 | ThA = 4085 N |
| axle5 | ThA = 4085 N |

calc. residual (hot) braking force in N

(item 4.3.1.4 of appendix 2 to annex 11)

|        |               |             |
|--------|---------------|-------------|
| axle 1 | (rdyn 421 mm) | T = 44727 N |
| axle 2 | (rdyn 421 mm) | T = 44727 N |
| axle 3 | (rdyn 421 mm) | T = 24166 N |
| axle 4 | (rdyn 421 mm) | T = 24166 N |
| axle 5 | (rdyn 421 mm) | T = 24166 N |

basic test type III  
of subject (calculated)  
trailer (E) residual  
(hot)braking

braking rate of the vehicle  
(item 4.3.2 to appendix 2 to annex 11) 0.60 0.47

required braking rate  
(items 1.5.3 and 1.7.2 to annex 11) >= 0,4 and  
>= 0,6\*E (0.36)

|        |               |             |
|--------|---------------|-------------|
| axle 1 | (rdyn 421 mm) | T = 44727 N |
| axle 2 | (rdyn 421 mm) | T = 44727 N |
| axle 3 | (rdyn 421 mm) | T = 24166 N |
| axle 4 | (rdyn 421 mm) | T = 24166 N |
| axle 5 | (rdyn 421 mm) | T = 24166 N |

basic test type III  
of subject (calculated)  
trailer (E) residual  
(hot)braking

braking rate of the vehicle  
(item 4.3.2 to appendix 2 to annex 11) 0.60 0.47

required braking rate  
(items 1.5.3 and 1.7.2 to annex 11) >= 0,4 and  
>= 0,6\*E (0.36)

spring parking brake

|   |                 | axle 3  | axle 4  |
|---|-----------------|---------|---------|
| no of TRISTOP-actuators per axle line KDZ |                 | 2       | 2       |
| TRISTOP-actuator type                     |                 | T.14/16 | T.14/16 |
| lever length                              | lBh in mm       | 69      | 69      |
| stat. tyre radius                         | rstat max in mm | 401     | 401     |
| at a stroke of                            | s in mm         | 30      | 30      |
| min. force of spring brake                | TFZ in N        | 6160    | 6160    |
| sp.brake chamber no Meritor.....          |                 | 4       | 4       |
| release pressure                          | pLs in bar      | 4.8     | 4.8     |

calculation:

|                                   |          |        |        |
|-----------------------------------|----------|--------|--------|
| ratio until road                  |          | 3.9674 | 3.9674 |
| iFb = lBh*Eta*C*rBt/(rBn*rstat)   |          |        |        |
| for rstat in mm                   |          | 401    | 401    |
| brake force of spring br. Tf in N |          | 48188  | 48188  |
| Tf = (TFZ*KDZ-2*Co/lBh)*iFb       |          |        |        |
| braking rate                      | zf laden | 0.289  |        |
| zf = sum (Tf)/P + 0,01            |          |        |        |

Test of the frictional connection required by the parking brake

minimum wheelbase/minimum supporting width min Ef necessary  
to fulfil the regulations

$$\text{min Ef} = E * (1 - PR/P + zferf * h/E) / (1 - zferf / (fzul * nf/ng))$$

$$\text{min Ef} = 4714 \text{ mm} \quad \text{for } E = 6000 \text{ mm}$$

$$\text{min Ef} = 5057 \text{ mm} \quad \text{for } E = 6500 \text{ mm}$$

min Ef = minimum distance between front axle(s) (trailer) or support (semitrailer)  
and the rear axle(s) (resultant of the bogie)  
E = wheel base  
fzul = 0.80 maximum permissible frictional connection required  
zferf = 0.18 maximum required braking ratio of the parking brake  
h = 2200 mm height of center of gravity - laden  
PR = 19200 kg maximum bogie mass - laden  
P = 35200 kg maximum total mass - laden  
nf = 2 no. of axle(s) with TRISTOP spring brake actuators  
ng = 3 no. of bogie axle(s)


**reference values**

reference values for z = 50% for max rdyn: 421 mm

|        | pz [bar] | T [N] | T [N] |
|--------|----------|-------|-------|
| axle 1 | 1.0      | 5070  |       |
|        | 6.5      | 47746 |       |
| axle 2 | 1.0      | 5070  |       |
|        | 6.5      | 47746 |       |
| axle 3 | 1.0      |       | 4876  |
|        | 4.3      |       | 25702 |
| axle 4 | 1.0      |       | 4876  |
|        | 4.3      |       | 25702 |
| axle 5 | 1.0      |       | 4876  |
|        | 4.3      |       | 25702 |

VIN - no.:

|   | Axe(s) / Achse(n) |       |         |         |       |
|---|-------------------|-------|---------|---------|-------|
| brake cylinder type (service / parking)<br>Bremszylinder Typ (Betrieb / Fest) | 20./              | 20./  | T.14/24 | T.14/24 | 14./  |
| Maximum stroke smax = ...mm<br>maximaler Hub smax = ....mm                    | 65                | 65    | 64      | 64      | 64    |
| Lever length = ...mm<br>Hebellänge = ....mm                                   | 69.08             | 69.08 | 69.08   | 69.08   | 69.08 |

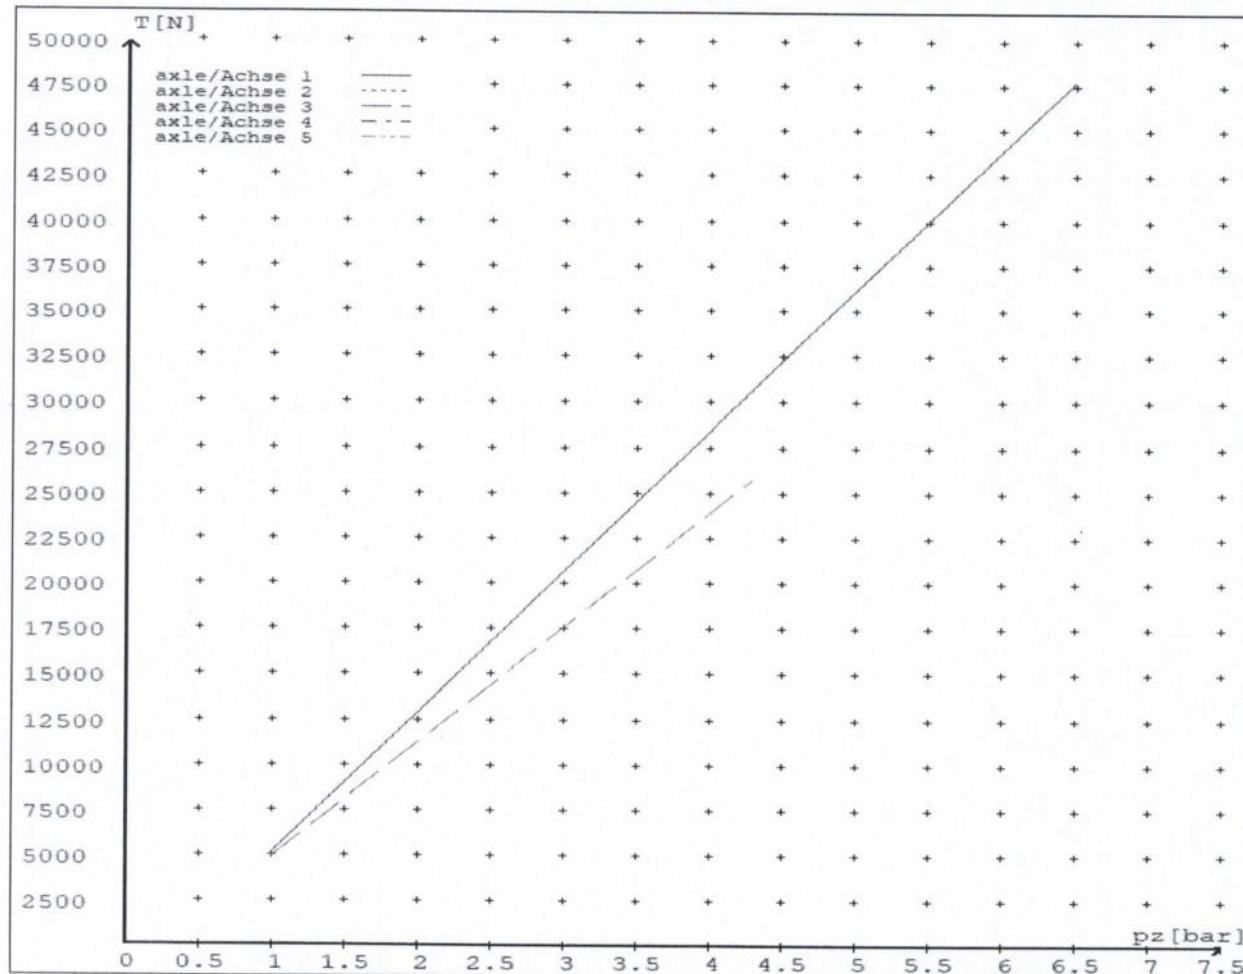

## **NOTICE TO VEHICLE OPERATOR**

**THIS VEHICLE HAS A BRAKE SYSTEM WHICH HAS BEEN DESIGNED AND FITTED IN ACCORDANCE WITH THE LAND TRANSPORT HEAVY VEHICLE BRAKE RULE 32015/4.**

**IF THIS VEHICLE IS OPERATED IN CONJUNCTION WITH NON-CERTIFIED VEHICLES, THERE MAY BE OPERATIONAL FACTORS WHICH NEED TO BE TAKEN INTO CONSIDERATION.**

**PLEASE REFER TO THE CERTIFIER FOR FURTHER INFORMATION.**

**EXCERPT FROM LAND TRANSPORT RULE; HEAVY-VEHICLE BRAKES RULE 32015/4. SECTION 10,**

### **10.1 RESPONSIBILITIES OF OPERATORS**

A person who operates a vehicle must ensure that the vehicle complies with this rule.

### **10.2 RESPONSIBILITIES OF REPAIRERS**

A person who repairs or adjusts a brake must ensure that the repair or adjustment:

- a) does not prevent the vehicle from complying with this rule;
- b) complies with Land Transport Rule: Vehicle Repair 1998.

### **10.3 RESPONSIBILITIES OF MODIFIERS**

A person who modifies a vehicle so as to affect the braking performance of the vehicle must:

- a) ensure that the modification does not prevent the vehicle from complying with this Rule; and
- b) notify the operator that the vehicle must be inspected and, if necessary, certified by a person or organisation appointed to carry out specialist inspection and certification of heavy vehicle brakes.

**IF YOU ARE UNSURE ABOUT YOUR RESPONSIBILITIES, PLEASE CONTACT THE VEHICLE MANUFACTURER, OR MYSELF.**

**COMPLAINTS.** Complaints and Warranty issues which relate to Brake Certification will be acknowledged within 7 working days and a resolution proposed within 25 working days. Resolution of complaints and Warranty issues is subject to Transpecs Warranty policy. Customers have the right to appeal to the New Zealand Transport Authority if dissatisfied with a Compliance issue. (Refer NZTA Deed Of Appointment Para 47.4) NZTA Helpdesk 0800 699 000

(p.p.).....  
(J.Hirst (JEH) HVEK)

## **NOTICE TO VEHICLE OPERATOR**

**This trailer is equipped with an Electronic Brake System.**

To comply with the New Zealand Heavy Vehicle Brake Rule 32015/4, it must be used only in conjunction with a truck/tractor equipped with a 5 or 7 pin ABS/EBS power supply socket.

Failure to connect to such supply invalidates Brake Rule compliance.

The trailer ABS/EBS warning light on the towing vehicle dashboard must illuminate when the ignition is switched on and extinguish when the vehicle is in motion.

If the light does not illuminate when ignition is switched on, the system must be checked. If the light remains illuminated when the vehicle is in motion, Brake Rule compliance is compromised. Repairs must be made as soon as possible.

**If you are unsure of your responsibilities and/or obligations, please contact either the vehicle manufacturer or myself.**

(p.p.)  
JE Hirst  
(JEH\_HVEK)  
(09 980 7300)



**HEAVY VEHICLE BRAKE RULE  
32015/4 WORKSHEET  
(PROCEDURE DOCUMENTATION SHEET-PDS)  
&  
CONFIRMATION OF COMPLIANCE**

**CERTIFICATE NO.** JH181036

**CUSTOMER NAME** DOMETT TRAILERS LTD

**CUSTOMER ORDER NO.** 5950      **DATE RECEIVED** 23-Oct-18

**VEHICLE TYPE** STOCK TRAILER

**VIN/ CHASSIS NO.** 7A9E25014J1023784

**BRIEF SPECIFICATION AS CERTIFIED TO SCHEDULE 5**

| <b>BRAKE VALVES</b>         | <b>MAKE</b>   | <b>TYPE</b>   |
|-----------------------------|---------------|---------------|
| PRIMARY RELAY               | WABCO         | 480 102 08. 0 |
| SECONDARY RELAY             | WABCO         | 480 207 202 0 |
| YARD RELEASE VALVE          | SEALCO        | 17600B        |
| PARK BRAKE VALVE            | SEALCO        | 110701        |
| <b>SUSP. VALVES [WABCO]</b> | <b>FRONT</b>  | <b>REAR</b>   |
| CONTROL                     | 441 044 101 0 | N/A           |
| DISTANCE SENSOR             | 464 008 011 0 | 464 008 011 0 |

**OTHER VALVES:**

|       |       |       |               |          |            |
|-------|-------|-------|---------------|----------|------------|
| MAKE: | WABCO | TYPE: | 461 513 002 0 | SETTING: | 5.5 Bar    |
| MAKE: | WABCO | TYPE: | 446 192 110 0 | SETTING: | SMARTBOARD |
| MAKE: |       | TYPE: |               | SETTING: |            |
| MAKE: |       | TYPE: |               | SETTING: |            |

| <u>BRAKE CHAMBERS:</u>         | <u>AXLE 1 &amp; 2</u>                   | <u>AXLE 3 &amp; 4</u>                | <u>AXLE 5</u> |
|--------------------------------|---|--------------------------------------|---------------|
| <b>MAKE</b>                    | TSE                                     | TSE                                  | TSE           |
| <b>SIZE</b>                    | 20HSCLD65                               | 1416HTLD64                           | 14HSCLD64     |
| <b>MAX STROKE (mm)</b>         | 65                                      | 64                                   | 64            |
| <b>SLACK LENGTH (mm)</b>       | 69                                      | 69                                   | 69            |
| <br><b>DRUM TYPE:</b>          | N/A                                     | N/A                                  | N/A           |
|                                |   | <b>OR</b>                            |               |
| <b>BRAKE CALIPER:</b>          | SBW1937                                 | SBW1937                              | SBW1937       |
| <br><b>FRICITION MATERIAL:</b> | <input checked="" type="checkbox"/> OEM | <input type="checkbox"/> AFTERMARKET |               |
| <u>LINING BRAND</u>            | <u>AXLE 1 &amp; 2</u>                   | <u>AXLE 3 &amp; 4</u>                | <u>AXLE 5</u> |
|                                | JURID 539                               | JURID 539                            | JURID 539     |
| <b>OTHERS:</b>                 |   |                                      |               |
| <b>TYRES:</b>                  | <b>FRONT</b>                            | <b>REAR</b>                          |               |
|                                | 265 70 R 19.5                           | 265 70 R 19.5                        |               |
| <b>BRAKE CALCULATION #:</b>    | TP51747                                 |                                      |               |

### COMMENTS:

EBS, SPECIAL CONDITIONS APPLY. SEE INSTRUCTIONS ON LT400 # (CJC)  
**SALES ORDER #:** SO1297099      **PROCESS TIME:** 1 HOUR  
**TRAILERS EQUIPPED WITH PREV: THE PARK BRAKE PERFORMANCE **MUST BE****  
**MEASURED BY PULLING THE RED ACTUATION KNOB ON THE PREV VALVE WHEN**  
**THE AXLES – EQUIPPED WITH SPRING BRAKES – ARE IN THE BRAKE ROLLERS. THE**  
**PARK BRAKE IN THE CAB **MUST NOT BE APPLIED.****

### NOTES:

#### CHAMBERS & PARK BRAKE PERFORMANCE:

REFER TO BRAKE CALCULATION TP51747:  $z = 0.289$  @96377 (N)

FRONT FRICTION ( $\mu$ ) = 0.49

TSE 1416HTLD64 ARE NOT LISTED IN WABCOPRAME. TSE 1616HTLD ARE USED TO DETERMINE  
 THE PARK BRAKE PERFORMANCE

## CONFORMATION OF COMPLIANCE

I CONFIRM THAT THE VEHICLE IDENTIFIED IN PAGES 1 AND 2 OF THIS CONFORMATION OF COMPLIANCE COMPLIES WITH ALL RELEVANT REQUIREMENTS OF THE CURRENT NEW ZEALAND HEAVY VEHICLE BRAKE RULE 32015/4, SCHEDULE 5.

DATE: 23-Oct-18

SIGNED: (pp)

NAME & ID: J HIRST (JEH)

PHONE (BUS): 09 980 7300

FAX (BUS) 09 980 7306

POSTAL ADDRESS: TRANSPORT SPECIALTIES LTD  
PO BOX 98-971,  
MANUKAU CITY,  
MANUKAU 2241

POSITION: BRAKE CERTIFIER HVEK

I CONFIRM THE BRAKE SYSTEM OF THE VEHICLE IDENTIFIED IN PAGE 1 OF THIS STATEMENT OF COMPLIANCE AS MODIFIED BY MYSELF, CONTINUES TO COMPLY WITH ALL THE RELIVANT REQUIREMENTS OF THE CURRENT NEW ZEALAND HEAVY BRAKE RULE 32015/4 SCHEDULE 5.

DATE: SIGNED:

NAME:

CERTIFIERS ID: POSITION:

PHONE (BUS): FAX (BUS):

COMMENTS:

---

---

---