

Heavy vehicle specialist inspector's or manufacturing inspecting organisation's name (PRINT IN CAPS) **CHRIS CLARKE** ID **CJC**

Vehicle registration (optional) **7A9E20010K1023866** VIN/chassis number

Make **DOMETT** Component being certified: Chassis Load anchorage
 Log bolsters Towing connection Brakes
 Model (optional) **E2001 PH** SRT PSV stability PSV rollover
 Certification category Swept path PBS

Description of work
CERTIFY TO SCHEDULE 5 OF LTR 32015/5
NEW ZEALAND HEAVY VEHICLE BRAKE SPECIFICATION.
5AFT CURTAINSIDE **RSS ON TYRE: 265 70 R19.5**

Code/standard/rule certified to **LTR 32015/5** Component load rating (\$) **33 Tonnes GVM**
 General drawing number (\$) **N/A** **35 Tonnes (Group ratings)**


Supporting documents
BRAKE RULE CERTIFICATE JH190909
BRAKE CALCULATION # TP51615

Special conditions (optional)
WARNING LAMP MUST ILLUMINATE WHEN IGNITION IS SWITCHED ON & THEN
EXTINGUISH IMMEDIATELY OR WHEN VEHICLE SPEED EXCEEDS 7 KM/H

Certification expiry date (if applicable) **N/A (UNLESS MODIFIED)** Hub odometer reading (omit zeroes, first)

Declaration

I the undersigned, declare that I am the heavy vehicle specialist inspector identified and I hold a current valid appointment. I certify that the above mentioned vehicle component's design, manufacture and installation, and this certification conforms in all respects with the Land Transport Rule Vehicle Standards Compliance 2002 and my appointment. To the best of my knowledge the information contained in this certificate is true and correct.

Inspector's ID (if different from inspector below) _____
 Inspector's signature 
 Inspector's name (PRINT IN CAPS) **CHRIS CLARKE** ID number **718692**
 Date **12-Sep-19** Number **718692**

CoF vehicle inspector ID (if applicable) _____ CoF vehicle inspector signature (if applicable) _____ Date _____

All fields are mandatory unless otherwise stated.

WABCO START-UP LOG

System	Trailer EBS-E	WABCO part number	480 102 084 0
Production date	2019-01-15	Serial number	437007152200N
Serial number (modulator)	000000500282		
Fingerprint Customer EOL / Customer Development / Flash Program	W503643 / 2019-09-12 ; 00000000 / 0000-00-00 ; 00000000 / 0000-00-00		

WABCO

TRAILER EBS-E

GGV/SADR TUEH TB 2007 - 019.00
ATRP0185

HESSTELLER MANUFACTURER CONSTRUCTEUR	DOMETT TRAILERS		
TYPE	5AFT CURTAINSIDE		
VERFICHT IDENT-NUMBER CHASSIS NUMBER MACHINEN-DECKENISS	7A9E20010K1023866		
BREMSBERECHNUNGS-NR. BRAKE CAL CLAMPING NO. POLYMER-REINIGUNG POLYMER CLEANING NO. DENTS ROUE DENTEE c-d 1 s 1	TP51615A		
RSS RSS RSS	100	100	4S/3M
Einachsbeanspruchung Single Trac Montré simple		Leistensatz Essieu viertr Critical Trailer	
Zwillingsanfertigung Twin Trac Montre jumelle	X	Kapazitatives Fahrzeug Vehicule capacitive	
Subsystems	SB	I/O	24N


GIO	Pin1	Pin3	Pin4
1	TAV1	MH	TAV1
2	eTASC	---	eTASC
3	ALS2	ALS2	---
4	---	---	LS1
5	DIAG	DIAG	DIAG
6	24V-O1	---	---
7	---	---	---

ACHTSE ESSIEU	pm (bar)	6.5	pm (bar)	0.6	2.0	6.5	T ₀	TYP TYPE	L ₁ (mm)	L ₂ (mm)	TR (dan)				
											1.0	Pz			
1	1600	0.6	1.6	8000	4.7	0.4	1.3	---	5.7	-	20	65	69	514	4228
2	1600	0.6	1.6	8000	4.7	0.4	1.3	---	5.7	-	20	65	69	514	4228
3	1300	0.4	1.3	6400	3.5	0.3	1.4	---	4.8	-	14 / 16	64	69	495	2937
4	1300	0.4	1.3	6400	3.5	0.3	1.4	---	4.8	-	14 / 16	64	69	495	2937
5	1300	0.4	1.3	6400	3.5	0.3	1.4	---	4.8	1	14	64	69	495	2937

TEBS-E

Diagnostic memory	OK	Warning lamp control	OK
Parameter setting	carried out	Stop light supply	OK
EBS pressure test	OK	Lifting axle test	Not tested
Redundancy test	OK	ECAS height sensor calibration	Not tested
ABS sensor assignment	OK	Height sensor axle load	Not tested
RTR test	Not tested	Leak test	Not tested
Immobilizer test	Not tested	Signal outputs	Not tested
Signal inputs	Not tested	Tag axle test	Not tested

Electronic Extension Module

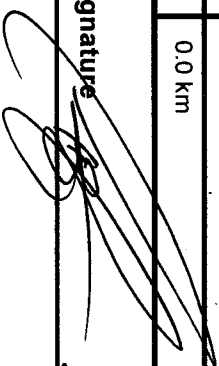Diagnostic memory	Not tested	Signal outputs	Not tested.
TailGUARDlight	Not tested	TailGUARD	Not tested
Manufacturer	DOMETT TRAILERS	Vehicle ident. no	7A9E20010K1023866
Vehicle type	5AFT CURTAINSIDE	Odometer reading	0.0 km
next Service	0 km	Trip reading	0.0 km
Tester	Chris Clarke	Signature 	
Date	2019-09-12 10:37:02 AM		

distribution: DOMETT TRAILERS
 7A9E20010K1023866
 SODC: JH190909
 LT400: CJC 718692

please note!
 This brake calculation is made under consideration of
 -the legal prescriptions mentioned above in the version valid
 at the time of making the program (V6.14.04.20),
 -the functional characteristics of our products
 as well as the data of the brake out of the test
 approvals of the axle manufacturers, and
 -the other vehicle data included in the brake calculation.
 Please check whether these data correspond to the actual vehicle data.
 Our conditions of delivery apply (particularly section 9.0).
 In any case we commend to do a braking harmonisation!
 WABCOBrake V6.14.04.20 db 03.11.2017

vehicle manufacturer: DOMETT TRAILERS
 trailer model : SAFT CURTAINSIDE
 trailer type : 5-axle-full-trailer
 remarks : air / hydraulic / VA suspension
 WABCO TRAILER - EBS
 TRISTOP 3+4: T.14/24 [TSE1416HTID64 ACTUALLY FITTED -
 SEE PAGE 7 FOR PERFORMANCE DATA]
 265/70 R 19,5

axle 1 + 2 + 3 + 4 + 5 : HENDRICKSON, SBW 1937, AT0185,

		unladen	laden
total mass	P	7100	35200
axle 1	P1	1600	8000
axle 2	P2	1600	8000
axle 3	P3	1300	6400
axle 4	P4	1300	6400
axle 5	P5	1300	6400
wheel base	E	8200	2098
centre of gravity height	h	650	

	axle 1					axle 2					axle 3					axle 4					axle 5				
	no. of combined axles	no. of brake chambers per axle line	KDZ	manually	axle 1	manually	axle 2	manually	axle 3	manually	axle 4	manually	axle 5	manually	axle 1	manually	axle 2	manually	axle 3	manually	axle 4	manually	axle 5		
The power output corresponds to	2	BZ 122.1	BZ 122.1	BZ 119.6	BZ 119.6	BZ 122.1	BZ 122.1	BZ 119.6	BZ 119.6	BZ 122.1	BZ 122.1	BZ 122.1	BZ 122.1	BZ 122.1	1	1	2	2	2	2	2	2	2		
brake chamber manufacturer	20.	Meritor	Meritor	Meritor	Meritor	Meritor	Meritor	Meritor	Meritor	Meritor	Meritor	Meritor	Meritor	Meritor											
chamber size	69	69	69	69	69	69	69	69	69	69	69	69	69												
lever length	23.49	23.49	23.49	23.49	23.49	23.49	23.49	23.49	23.49	23.49	23.49	23.49	23.49												
brake factor	421	421	421	421	421	421	421	421	421	421	421	421	421												
dyn. rolling radius	421	421	421	421	421	421	421	421	421	421	421	421	421												
dyn. rolling radius	421	421	421	421	421	421	421	421	421	421	421	421	421												
threshold torque	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0												

calculation:

chamber pressure(rdyn min)	PH at z=22,5&bar	2.2	2.2	2.1	2.1	2.1
chamber pressure(rdyn max) <th>PH at z=22,5&bar</th> <td>2.2</td> <td>2.2</td> <td>2.1</td> <td>2.1</td> <td>2.1</td>	PH at z=22,5&bar	2.2	2.2	2.1	2.1	2.1
chamber press.(servo)pcha	at pm6,5bar	5.7	5.7	4.8	4.8	4.8
piston force	ThA at pm6,5bar	6578	6578	4586	4586	4586
brake force(rdyn min)	T lad. at pm6,5bar	50826	50826	35307	35307	35307
brake force(rdyn max)	T lad. at pm6,5bar	50826	50826	35307	35307	35307
brake force within 1 % rolling friction	proportion	22.3	22.3	18.5	18.5	18.5

braking rate z laden 0.601 for rdyn min
 z = sum (TR)/PRmax 0.601 for rdyn max

Trailer may only be operated in combination with trucks/tractors with ISO 7638 supply (5 or 7 polar).

brake diagram :

maximum pressure: 8.5 bar

axle 1:

valve 1: 971 002 ... 0 WABCO
EBS emergency valve

valve 2: 480 207 0... 0 WABCO or 480 207 2.. 0
EBS relay valve

brake cylinder: Meritor 20HSCID65

axle 2:

valve 1: 971 002 ... 0 WABCO
EBS emergency valve

valve 2: 480 207 0.. 0 WABCO or 480 207 2.. 0
EBS relay valve

brake cylinder: Meritor 20HSCID65

axle 3:

valve 1: 971 002 ... 0 WABCO
EBS emergency valve

valve 2: 480 102 ... 0 WABCO
EBS trailer modulator

brake cylinder: Meritor 1424HTLD64

axle 4:
 valve 1: 971 002 ... 0 WABCO
 EBS emergency valve
 valve 2: 480 102 ... 0 WABCO
 EBS trailer modulator


brake cylinder: Meritor 1424HTID64

axle 5:
 valve 1: 971 002 ... 0 WABCO
 EBS emergency valve
 valve 2: 480 102 ... 0 WABCO
 EBS trailer modulator


brake cylinder: Meritor 14HSCID64

test type III (ZIII = 0.30) for rdyn min : axle1 axle2 axle3 axle4 axle5
 at pm 3.6 bar => pcha in bar : 2.9 2.9 2.6 2.6 2.6
 test type III (ZIII = 0.06) for rdyn min : axle1 axle2 axle3 axle4 axle5
 at pm 1.3 bar => pcha in bar : 0.8 0.8 0.8 0.8 0.8


brake chamber pressure laden

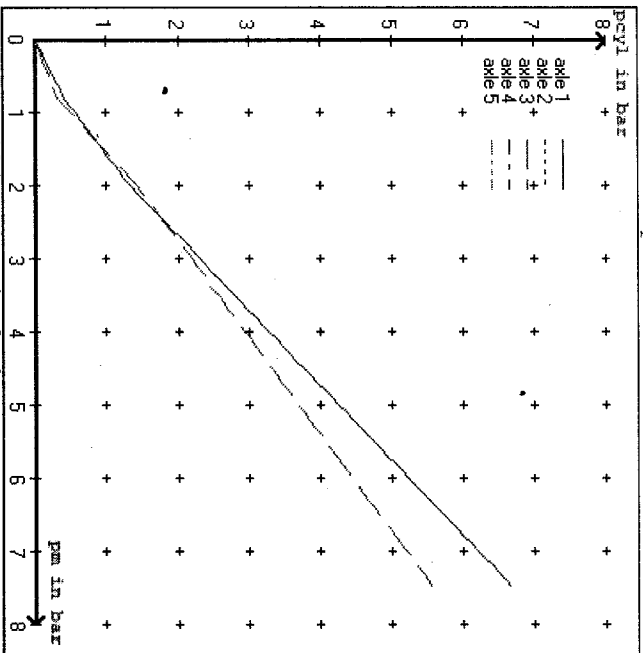


brake chamber pressure unladen

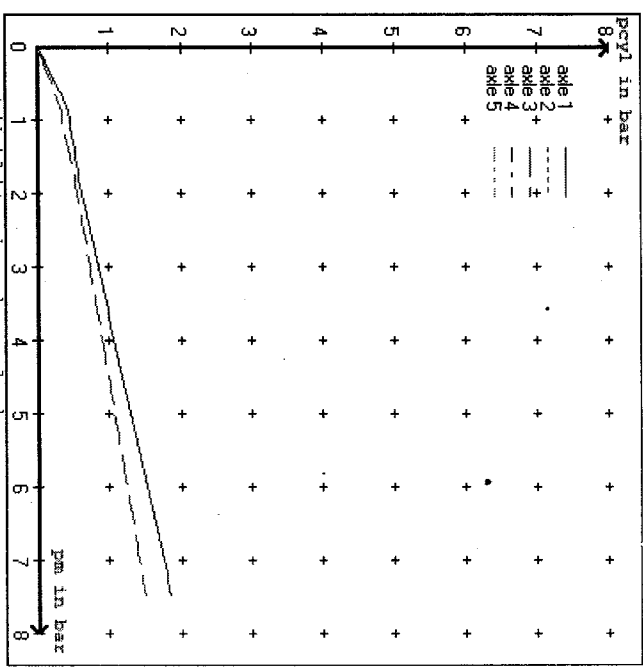


compatibility band laden

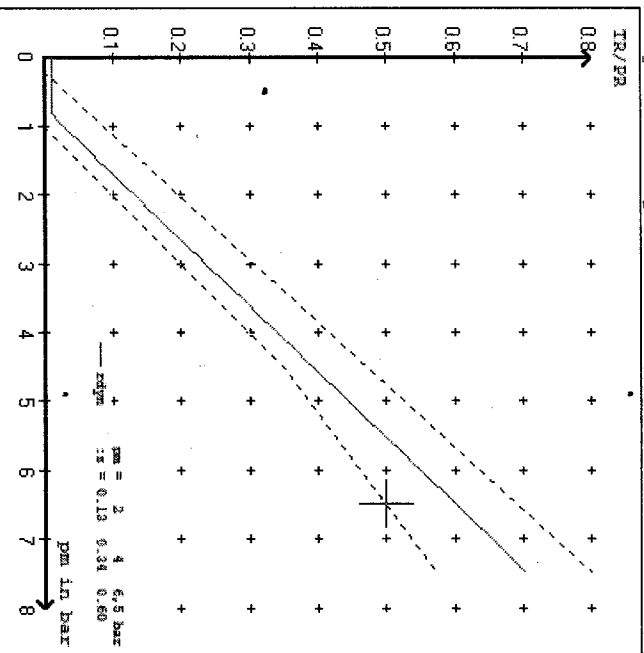


compatibility band unladen

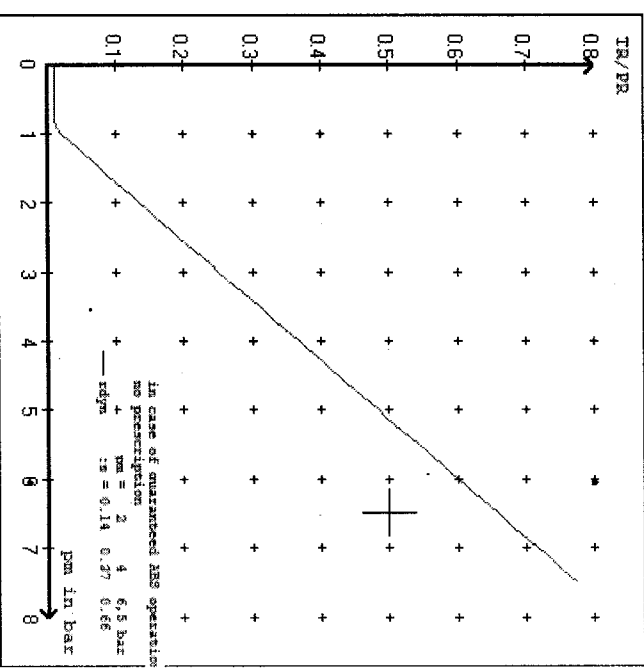

curves of friction laden

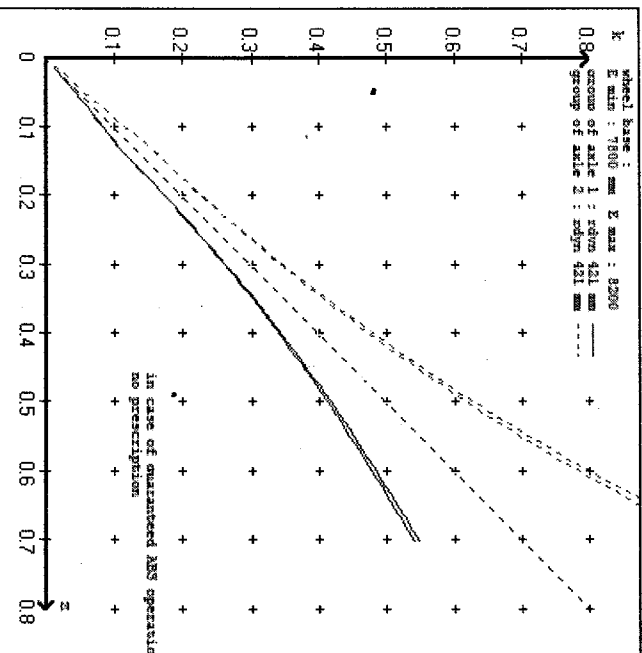

curves of friction unladen

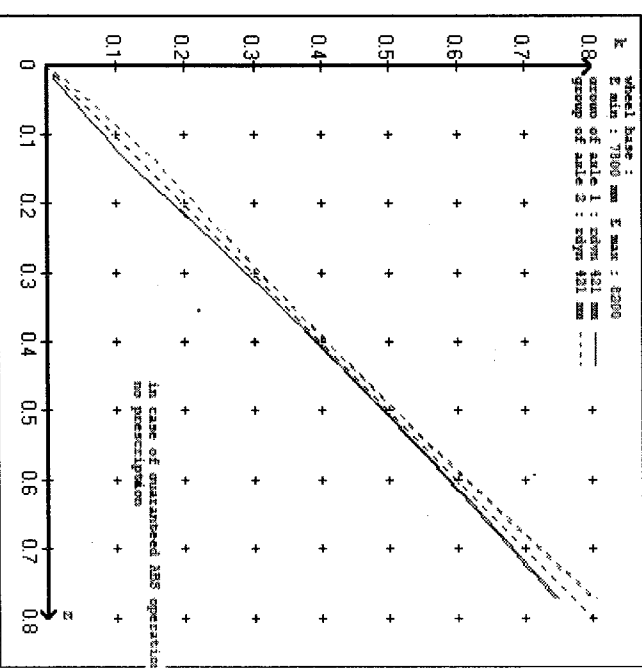

vehicle manufacturer: DOMETT TRAILERS
 trailer model : 5AFT CURTAINSIDE
 trailer type : 5-axle-full-trailer

brake chamber and lever length :
 axle 1 : 2 x type/diameter 20. (Meritor) lever length 69 mm
 axle 2 : 2 x type/diameter 20. (Meritor) lever length 69 mm
 axle 3 : 2 x type/diameter T.14/24 (Meritor) lever length 69 mm
 axle 4 : 2 x type/diameter T.14/24 (Meritor) lever length 69 mm
 axle 5 : 2 x type/diameter 14. (Meritor) lever length 69 mm

brake diagram :

valve :
 971 002 ... 0 WABCO EBS emergency valve
 480 207 0... 0 WABCO EBS relay valve or 480 207 2... 0
 480 102 ... 0 WABCO EBS trailer modulator

EBS input data

=====
 vehicle manufacturer: DOMETT TRAILERS
 trailer model : 5AFT CURTAINSIDE
 trailer type : 5-axle-full-trailer
 brake calculation no. : TP 51615A

tire circumference main axle : 2650 for rdyn max
 tire circumference auxiliary axle : 2650 for rdyn max

assignment pm / deceleration z: pm 0.8 bar z = 0.010
 2.0 bar z = 0.134
 (laden condition) 6.5 bar z = 0.600

axle	control pressure pm		brake pr. unladen	control pressure pm		brake pr. laden		
	axle load unladen	bellow pr. unladen		axle load laden	bellow pr. laden			
1	1600	to be	1.6	8000	to be	0.4	1.3	5.7
2	1600	entered by	1.6	8000	entered by	0.4	1.3	5.7
3	1300	the vehicle	1.3	6400	the vehicle	0.3	1.4	4.8
4	1300	manufact.	1.3	6400	manufact.	0.3	1.4	4.8
5	1300		1.3	6400		0.3	1.4	4.8

The unladen values indicated in the above table are values for the basic parameter set. Higher unladen axle loads and liftaxles are automatically recognized and do not require separate adjustment. The above unladen axle loads must not be fallen below.

axle 1		axle 2		axle 3		axle 4		axle 5	
axle load	pcyl	axle load	pcyl	axle load	pcyl	axle load	pcyl	axle load	pcyl
1600	1.6	1600	1.6	1300	1.3	1300	1.3	1300	1.3
2100	1.9	2100	1.9	1800	1.6	1800	1.6	1800	1.6
2600	2.2	2600	2.2	2300	2.0	2300	2.0	2300	2.0
3100	2.6	3100	2.6	2800	2.3	2800	2.3	2800	2.3
3600	2.9	3600	2.9	3300	2.7	3300	2.7	3300	2.7
4100	3.2	4100	3.2	3800	3.0	3800	3.0	3800	3.0
4600	3.5	4600	3.5	4300	3.4	4300	3.4	4300	3.4
5100	3.8	5100	3.8	4800	3.7	4800	3.7	4800	3.7
8000	5.7	8000	5.7	6400	4.8	6400	4.8	6400	4.8

data sheet to ECE vehicle type-approval certificate concerning braking equipment: according to ECE R13 annex 11

axle 1 : reference axle: HENDRICKSONSBW 1937	test report : AT0185	brake lining: WABCO 230	date : 02.03.2017
axle 2 : reference axle: HENDRICKSONSBW 1937	test report : AT0185	brake lining: WABCO 230	date : 02.03.2017
axle 3 : reference axle: HENDRICKSONSBW 1937	test report : AT0185	brake lining: WABCO 230	date : 02.03.2017
axle 4 : reference axle: HENDRICKSONSBW 1937	test report : AT0185	brake lining: WABCO 230	date : 02.03.2017
axle 5 : reference axle: HENDRICKSONSBW 1937	test report : AT0185	brake lining: WABCO 230	date : 02.03.2017

Calc. Verif. of residual (hot) braking force type III
(item 4.2.1 of appendix 2 to annex 11)

axle 1	(rdyn 421 mm)	T = 24.0 % Fe
axle 2	(rdyn 421 mm)	T = 24.0 % Fe
axle 3	(rdyn 421 mm)	T = 18.5 % Fe
axle 4	(rdyn 421 mm)	T = 18.5 % Fe
axle 5	(rdyn 421 mm)	T = 18.5 % Fe

calculated actuator stroke in mm
(item 4.3.1.1 of appendix 2 to annex 11)

axle 1	(sp = 58 mm)	S = 48 mm
axle 2	(sp = 58 mm)	S = 48 mm
axle 3	(sp = 56 mm)	S = 48 mm
axle 4	(sp = 56 mm)	S = 48 mm
axle 5	(sp = 56 mm)	S = 48 mm

average thrust output in N at pm = 6,5 bar (however max. pcha = 7,0 bar)

axle1	ThA = 6578 N
axle2	ThA = 6578 N
axle3	ThA = 4586 N
axle4	ThA = 4586 N
axle5	ThA = 4586 N

calc. residual (hot) braking force in N
(item 4.3.1.4 of appendix 2 to annex 11)

axle 1	(rdyn 421 mm)	T = 40650 N
axle 2	(rdyn 421 mm)	T = 40650 N
axle 3	(rdyn 421 mm)	T = 28257 N
axle 4	(rdyn 421 mm)	T = 28257 N
axle 5	(rdyn 421 mm)	T = 28257 N

basic test type III
of subject (calculated)
trailer (E) residual

braking rate of the vehicle
(item 4.3.2 to appendix 2 to annex 11) 0.60 (hot)braking 0.48

required braking rate
(items 1.5.3 and 1.7.2 to annex 11) >= 0,4 and >= 0,6*E (0.36)

axle 1	(rdyn 421 mm)	T = 40650 N
axle 2	(rdyn 421 mm)	T = 40650 N
axle 3	(rdyn 421 mm)	T = 28257 N
axle 4	(rdyn 421 mm)	T = 28257 N
axle 5	(rdyn 421 mm)	T = 28257 N

basic test type III
of subject (calculated)
trailer (E) residual

braking rate of the vehicle
(item 4.3.2 to appendix 2 to annex 11) 0.60 (hot)braking 0.48

required braking rate
(items 1.5.3 and 1.7.2 to annex 11) >= 0,4 and >= 0,6*E (0.36)

spring parking brake

	axle 3	axle 4
no of TRISTOP-actuators per axle line KDZ	2	2
TRISTOP-actuator type	T.14/16	T.14/16
lever length	69	69
stat. tyre radius	401	401
at a stroke of	s	in mm
min. force of spring brake	TFZ in N	30
sp.brake chamber no Meritor.....	4	6160
release pressure	plus in bar	4
	4.5	4.5

calculation:

ratio until road	4.0466	4.0466
iFb = $1Bh * \eta + C * rBt / (rBn * rstat)$	401	401
brake force of spring br. Tf	49151	49151
Tf = $(TFZ * KDZ - 2 * Co / 1Bh) * iFb$		
braking rate	zf laden	0.295
zf = $\text{sum}(Tf) / P + 0,01$		

Test of the frictional connection required by the parking brake

minimum wheelbase/minimum supporting width min Ef necessary to fulfil the regulations

$$\min Ef = E * (1 - PR/P + zferf * h/E) / (1 - zferf / (fzul * nf/ng))$$

min Ef =	5922 mm	for E =	7800 mm
min Ef =	6196 mm	for E =	8200 mm

min Ef = minimum distance between front axle(s) (trailer) or support (semitraile) and the rear axle(s) (resultant of the bogie)

E	=	wheel base
fzul	=	0.80 maximum permissible frictional connection required
zferf	=	0.18 maximum required braking ratio of the parking brake
h	=	2098 mm height of center of gravity - laden
PR	=	19200 kg maximum bogie mass - laden
P	=	35200 kg maximum total mass - laden
nf	=	2 no. of axle(s) with TRISTOP spring brake actuators
ng	=	3 no. of bogie axle(s)

axle manufacturer
 type of brake
 type of axle

axle 1 + 2 + 3 + 4 + 5
 HENDRICKSON
 SBW 1937
 SBW 1937
 AT0185

test report of characteristic value

adm. stat. axle load
 tested axle load
 max. adm. tyre radius
 adm. cam. torque (6,5 bar)
 lining area per brake
 no. of brake cylinder
 brakefactor (SB) Bf
 brakefactor (PB) Bf
 threshold torque (Co,dec)

Pstat in kg 9000
 Pe in kg 10200
 Rezul in mm 999
 Czul in Nm 640
 AB in cm² 292
 - - 2
 - 23,49
 - 23,49
 Mo in Nm 6

date
 brake lining
 cam torque
 brake force
 stroke
 tested tyre radius
 tested lever length
 threshold torque (Co,e)

02.03.2017
 WABCO 230
 Ce in Nm 638
 TeIII in dan 4649
 seIII in mm 48
 Re in mm 520
 le in mm 69
 in Nm 5


reference values

reference values for z = 50% For max rdyn: 421 mm

	pz [bar]	T [N]	T [N]
axle 1	1.0 5.7	5150 42285	
axle 2	1.0 5.7	5150 42285	
axle 3	1.0 4.8		4955 29374
axle 4	1.0 4.8		4955 29374
axle 5	1.0 4.8		4955 29374


VIN - no.:

	Axle(s) / Achse(n)				
brake cylinder type (service / parking)	20. /	20. /	T.14/24	T.14/24	14. /
Bremszylinder Typ (Betrieb / Fest)					
Maximum stroke smax = ...mm	65	65	64	64	64
maximaler Hub smax = ...mm					
Lever length = ...mm	69.08	69.08	69.08	69.08	69.08
Hebellänge = ...mm					

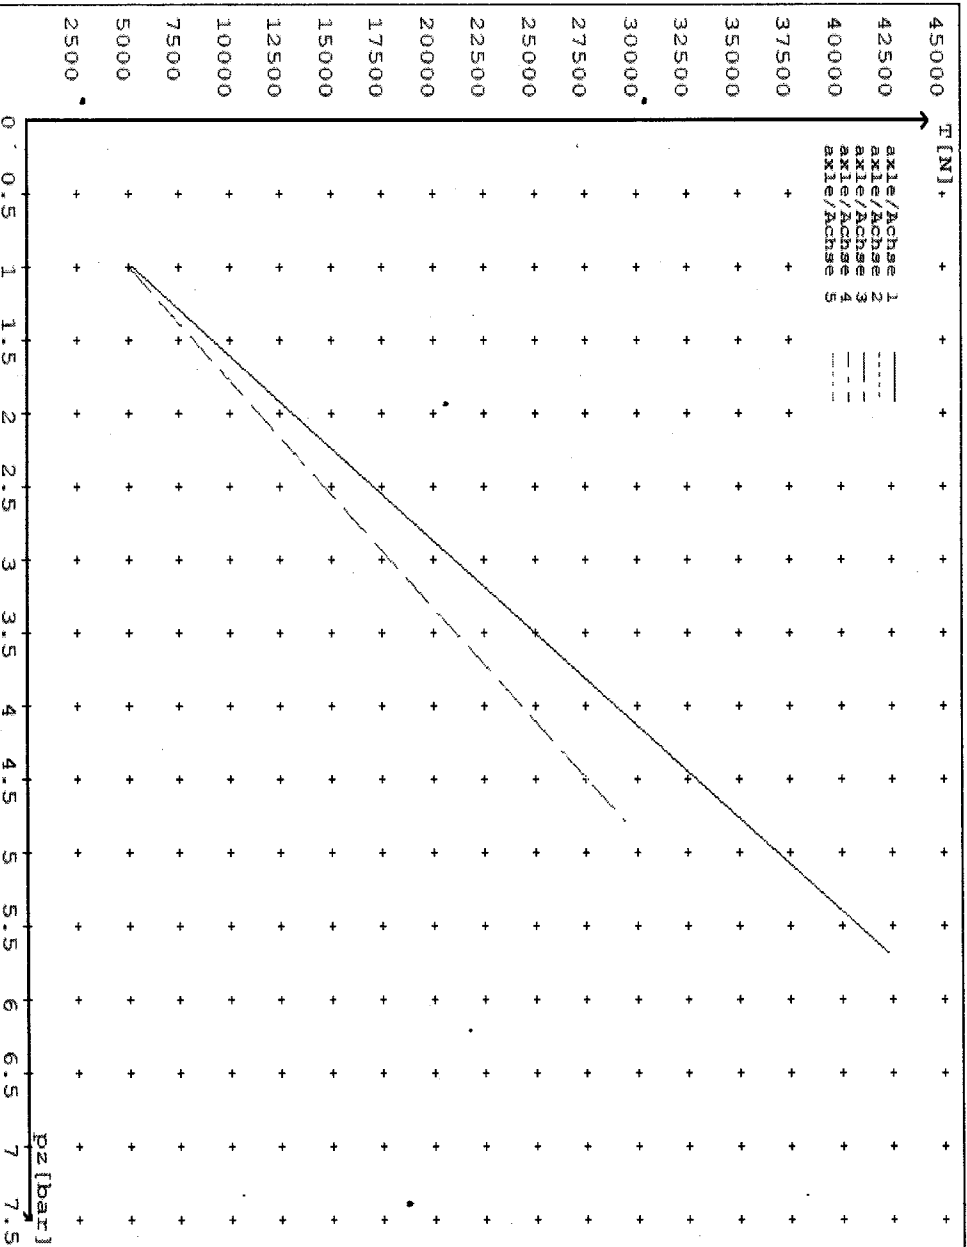

reference values for z = 0.5
 Angabe der Referenzwerte für z = 0.5
brake calculation no: TP 51615A date 21.06.2019
 Bremsberechnung Nr: TP 51615A vom 21.06.2019

for max rdyn: 421 mm
 für max rdyn: 421 mm

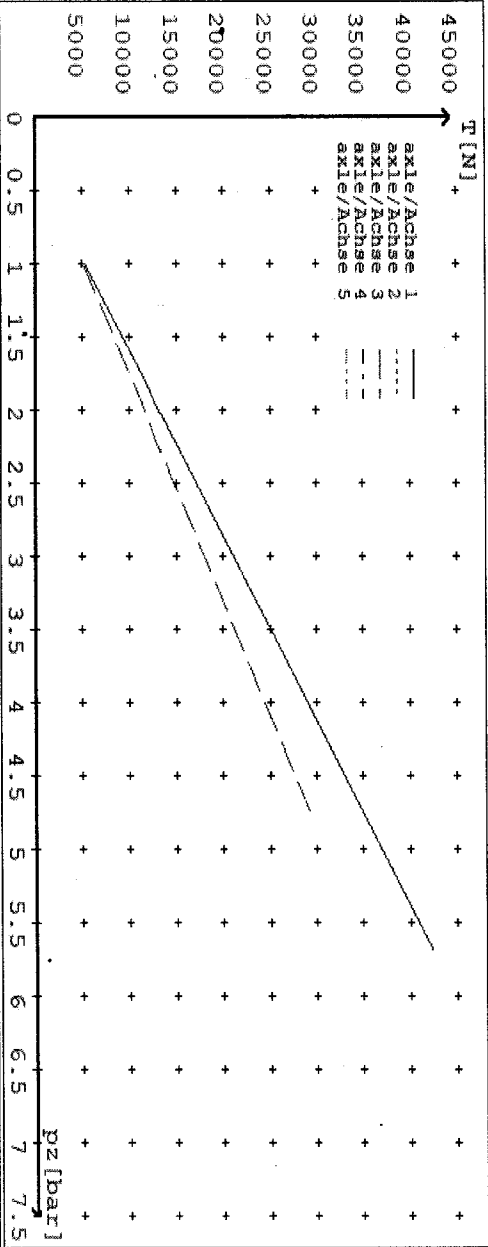

		Achse(s) / Achse(m)						
Brake cylinder type (service / parking)	20. /	20. /	T.14/24	T.14/24	T.14/24	T.14/24	14. /	
Brmszylinder Typ (Betrieb / Fest)	65	65	64	64	64	64	64	
Maximum stroke smax = ...mm								
maximaler Hub smax = ...mm								
Lever length = ...mm	69.08	69.08	69.08	69.08	69.08	69.08	69.08	
Hebellänge = ...mm								

GOUGH

Transpecs

NOTICE TO VEHICLE OPERATOR

THIS VEHICLE HAS A BRAKE SYSTEM WHICH HAS BEEN DESIGNED AND FITTED IN ACCORDANCE WITH THE LAND TRANSPORT HEAVY VEHICLE BRAKE RULE 32015/5.

IF THIS VEHICLE IS OPERATED IN CONJUNCTION WITH NON-CERTIFIED VEHICLES, THERE MAY BE OPERATIONAL FACTORS WHICH NEED TO BE TAKEN INTO CONSIDERATION.

PLEASE REFER TO THE CERTIFIER FOR FURTHER INFORMATION.

EXCEPT FROM LAND TRANSPORT RULE; HEAVY-VEHICLE BRAKES RULE 32015/5. SECTION 10,

10.1 RESPONSIBILITIES OF OPERATORS

A person who operates a vehicle must ensure that the vehicle complies with this rule.

10.2 RESPONSIBILITIES OF REPAIRERS

A person who repairs or adjusts a brake must ensure that the repair or adjustment:

- a) does not prevent the vehicle from complying with this rule;
- b) complies with Land Transport Rule: Vehicle Repair 1998.

10.3 RESPONSIBILITIES OF MODIFIERS

A person who modifies a vehicle so as to affect the braking performance of the vehicle must:

- a) ensure that the modification does not prevent the vehicle from complying with this Rule; and
- b) notify the operator that the vehicle must be inspected and, if necessary, certified by person or organisation appointed to carry out specialist inspection and certification of heavy vehicle brakes.

IF YOU ARE UNSURE ABOUT YOUR RESPONSIBILITIES, PLEASE CONTACT THE VEHICLE MANUFACTURER, OR MYSELF.

COMPLAINTS. Complaints and Warranty issues which relate to Brake Certification will be acknowledged within 7 working days and a resolution proposed within 25 working days. Resolution of complaints and Warranty issues is subject to Transpecs Warranty policy. Customers have the right to appeal to the New Zealand Transport Authority if dissatisfied with a Compliance issue. (Refer NZTA Deed Of Appointment Para 4.4 NZTA Helpdesk 0800 699 000

(p.p.)
(J.Hirst (TEH) HYEK)



NOTICE TO VEHICLE OPERATOR

This trailer is equipped with an Electronic Brake System.


To comply with the New Zealand Heavy Vehicle Brake Rule 32015/5, it must be used only in conjunction with a truck/tractor equipped with a 5 or 7 pin ABS/EBS power supply socket.

Failure to connect to such supply invalidates Brake Rule compliance.

The trailer ABS/EBS warning light on the towing vehicle dashboard must illuminate when the ignition is switched on and extinguish when the vehicle is in motion.

If the light does not illuminate when ignition is switched on, the system must be checked. If the light remains illuminated when the vehicle is in motion, Brake Rule compliance is compromised. Repairs must be made as soon as possible.

If you are unsure of your responsibilities and/or obligations, please contact either the vehicle manufacturer or myself.

(p.p.)

J B Hirst
(JEH HVVK)
(09 980 7300)

GOUGH

Transpecs

NOTICE TO VEHICLE OPERATOR

WABCO Park Release Emergency Valve
(PREV)

This trailer is equipped with a WABCO PREV
Part # 971 002 900 0

Application of the park brake via the cab control valve will actuate and apply all service brakes on the trailer. In the event of a leak in the service brake system the Spring Brakes will automatically override and hold the vehicle in compliance to Land Transport Rule: Heavy-vehicle Brakes Rule 32015/5.

When the vehicle is presented for COF the trailer park brake system is tested by pulling the red actuation knob on the PREV, situated mid way down the chassis rail. The cab control in the prime mover does not have to be applied for this test procedure.

If you are unsure of any aspect relating to this instruction please contact either the vehicle manufacturer or myself.

(p.p.)

J E Hirst

(JEH HV/EK)

(09 980 7300)

**NEW ZEALAND HEAVY VEHICLE BRAKE RULE 32015-5
WORKSHEET, PROCEDURE DOCUMENTATION SHEET
& CONFIRMATION OF COMPLIANCE**

CLIENT

MANUFACTURER: DOMETT TRAILERS

ADDRESS: TAURIKURA DRIVE, TAURANGA 3173

FLEET: BOOTH'S TRANSPORT

VEHICLE DETAILS

VEHICLE TYPE:	SAFT CURTAINSIDE	CERT #:	JH190909
YEAR:	2019	CALCULATION #:	TP51615
MAKE:	DOMETT	REGO:	N/A
MODEL:	E2001 PH	LT400 #:	718692
CHASSIS #:	1866	ORDER NUMBER:	6613
VIN #:	7A9E20010K1023866		
GVM: TONNES	33	PRIME MOVER:	EBS / EUROPEAN
LOAD CONFIGURATION:	MIXED FREIGHT		
GROUP RATINGS: TONNES	FRONT	REAR	
	16	19	
WHEEL BASE: METRES	8.15		
	UNLADEN COG	MAX HEIGHT	.HEIGHT DECK
	0.675	4.3	1.09
COG: METRES	2.008		
TARE: TONNES	FRONT	REAR	TOTAL
	3.2	3.9	7.1
TYRE SIZE:	FRONT	REAR	
	265 70 R19.5	265 70 R19.5	
ROLLING CIRCUMFERENCE: MM	2645	2645	
AXLE SPACING: METRES	1.31	2.51	

BRAKE & AXLE DETAILS

	MAKE	MODEL	TEST REPORT
AXLE:	HENDRICKSON	HND-PAN 19 DISC	ATRP0185
POLE WHEEL FRONT:	100	POLE WHEEL REAR:	100
LINING MATERIAL:	WABCO 230	BRAKE FACTOR:	23.49
SENSED AXLES:	2 + 4		
SERIAL NUMBERS:	1 N/A 2 N/A 3 N/A 4 N/A 5 N/A		

CHAMBER AND VALVING DETAILS

	AXLE 1 & 2	AXLE 3 & 4	AXLE 5
CHAMBERS:	TSE CHAMBERS	TSE CHAMBERS	TSE CHAMBERS
BRAND:	20HSCLD	1416HTLD	14HSCLD
SIZE:	65	64	64
STROKE: MILLIMETRES	BC 0041.0 Jul '07	BC0143.0	BZ 122.1 Sep '00
TEST REPORT #:	N/A	6.16	N/A
SPRINGBRAKE FORCE: KN	N/A	4.5	N/A
HOLDOFF PRESSURE: kPa	WABCO PAN19	WABCO PAN19	WABCO PAN19
FOUNDATION BRAKE:	69	69	69
LEVER LENGTH: MILLIMETRES	MAKE:	PART NUMBER:	PM PRESS. kPa
BRAKE VALVES:	WABCO	480 102 08.0 (MV)	80 kPa
ECU PART #:	WABCO	480 207 202 0 (12V)	80 kPa
3RD MODULATOR #:	YES	ELEX:	N/A
ANTI-COMPOUNDING:	WABCO_PREV	971 002 900 0	
SPRING BRAKE RELAY:	WABCO-PREV	971 002 900 0	
YARD RELEASE VALVE:	N/A	N/A	
INLINE RELAY FITTED:			

ECU DIRECTION: FRONT REAR FRONT FRICTION: μ

SMARTBOARD/OPTILINK: SMARTBOARD OPT-LINK Page 2

SUSPENSION

	FRONT	REAR
SUSPENSION TYPE:	PNEUMATIC	ELECTRONIC
MAKE:	HENDRICKSON_AIR	HENDRICKSON_AIR
MODEL:	HENDRICKSON_INTRAX	HENDRICKSON_INTRAX
BELLOW SIZE:	HND SHOCKLESS	HND SHOCKLESS
HEIGHT CONTROL VALVE:	464 008 011 0	441 050 100 0
OTHER VALVES:	N/A	463 090 500 0 (GTASC)
RIDE HEIGHT <small>MM</small> :	255	255
HANGER HEIGHT <small>MM</small> :	200	200
PEDESTAL HEIGHT <small>MM</small> :	40	40
LIFTAXLE:		YES 5TH AXLE
TIPPING DUMP SWITCH:		N/A
LIFTAXLE VALVE:		472 195 052 0

AIR TANKS

AIR TANKS STANDARD:	SAE J10A / EN286-2	
	FRONT	REAR
BRAKE TANK SIZE: L	46	71
AUXILIARY TANK SIZE: L	N/A	46
PRESSURE PROTECTION:	WABCO PEM: 461 513 002 0	

AIR LINES

TEST POINTS:		
CONTROL LINE:	X 1	TANK: X 1
REAR CHAMBER:	X 2	FRONT CHAMBER: X 1
DUOMATIC COLOUR CODED:	YES	

ELECTRONIC HEIGHT SENSOR CALIBRATION

	TIMER TICKS [F/R]	MILLIMETRE [F / R]
UPPER LEVEL:	1355	320
NORMAL LEVEL:	1304	255
LOWER LEVEL:	1246	175

CHECKS AT COMMISSION OF VEHICLE

CHAMBER BUNGS REMOVED: VALVE MOUNTING:

ECU BLANKING PLUGS CHECKED:

RESPONSE TIME:	MODULATOR 2.1	MODULATOR 2.2	RELAY VALVE
ms:	200	205	370

NOTES AND SPECIAL CONDITIONS

I UNDERSTAND AND DECLARE THAT I AM THE CERTIFIER IDENTIFIED BELOW AND HOLD A CURRENT VALID APPOINTMENT. I CERTIFY THAT AT THE TIME OF INSPECTION THE ABOVE MENTIONED VEHICLE COMPONENT DESIGN AND THIS CERTIFICATION COMPLIES IN ALL RESPECTS WITH THE LAND TRANSPORT RULE VEHICLE STANDARDS COMPLIANCE 2002 AND MY DEED OF APPOINTMENT. TO THE BEST OF MY KNOWLEDGE THE INFORMATION CONTAINED IN THIS CERTIFICATE IS TRUE AND CORRECT.

NEW ZEALAND HEAVY VEHICLE BRAKE RULE 32015/5, SCHEDULE 5.

DATE: 12/09/2019

SIGNED:

CERTIFIER NAME & ID: JOHN HIRST JEH

SODC ENDORSED BY: CHRIS CLARKE CJC

PHONE (BUS): 09-980-7300

FAX:

POSTAL ADDRESS:

**P.O. Box 98-971, Manukau 2241
New Zealand**