

Heavy vehicle specialist inspector's or manufacturing inspecting organisation's name (PRINT IN CAPS)

CHRIS CLARKE

ID

CJC

Vehicle registration (optional)

VIN/chassis number

7A9E20018K1023873

Make

DOMETT

Model (optional)

E2001 PH

Certification category

HVEK

Component being certified:

- Log bolsters
 SRT
 Swept path

 Chassis

- Towing connection
 PSV stability
 PBS

 Load anchorage Brakes PSV rollover

Description of work

CERTIFY TO SCHEDULE 5 OF LTR 32015/5**NEW ZEALAND HEAVY VEHICLE BRAKE SPECIFICATION.****5AFT CURTAININSIDE****RSS ON TYRE: 265 70 R19.5**Code/standard/rule certified to
LTR 32015/5

Component load rating(s)

33 Tonnes GVM

General drawing number(s)

N/A**35 Tonnes (Group ratings)**

Supporting documents

BRAKE RULE CERTIFICATE JH190812**BRAKE CALCULATION # TP51615**

Special conditions (optional)

**WARNING LAMP MUST ILLUMINATE WHEN IGNITION IS SWITCHED ON & THEN
EXTINGUISH IMMEDIATELY OR WHEN VEHICLE SPEED EXCEEDS 7 KM/H**


Certification expiry date (if applicable)

N/A [UNLESS MODIFIED]**or**

Hubodometer reading (whichever comes first)

<input type="checkbox"/>					
--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------

Designer's ID (if different from inspector below)

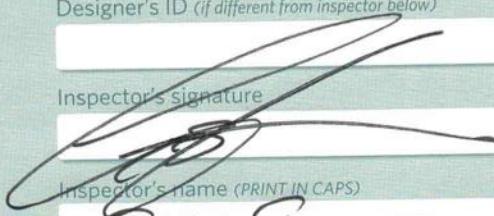
--

Inspector's signature


--

Inspector's name (PRINT IN CAPS)

Chris Clarke

ID number

CJC

Date

19-Aug-19

Number

712919

CoF vehicle inspector ID (if applicable)

CoF vehicle inspector signature (if applicable)

Date

All fields are mandatory unless otherwise stated.

WABCO


START-UP LOG

System	Trailer EBS-E	WABCO part number	480 102 084 0
Production date	2018-12-06	Serial number	437007028800H
Serial number (modulator)	000000500092		
Fingerprint Customer EOL / Customer Development / Flash Program	W503643 / 2019-08-19 ; 00000000 / 0000-00-00 ; 00000000 / 0000-00-00		

TEBS-E

Diagnostic memory	OK	Warning lamp control	OK
Parameter setting	carried out	Stop light supply	OK
EBS pressure test	OK	Lifting axle test	Not tested
Redundancy test	OK	ECAS height sensor calibration	Not tested
ABS sensor assignment	OK	Height sensor axle load	Not tested
RTR test	Not tested	Leak test	Not tested
Immobilizer test	Not tested	Signal outputs	Not tested
Signal inputs	Not tested	Tag axle test	Not tested

Electronic Extension Module

Diagnostic memory	Not tested	Signal outputs	Not tested
TailGUARDlight	Not tested	TailGUARD	Not tested
Manufacturer	DOMETT TRAILERS	Vehicle ident. no	7A9E20018K1023873
Vehicle type	5AFT CURTAININSIDE	Odometer reading	0.0 km
next Service	0 km	Trip reading	0.0 km
Tester	Chris Clarke	Signature	
Date	2019-08-19 11:11:28 AM		

trailer (full, semi-, centre-axle) with air brake system acc. to UN/ECE-R.13.11

distribution: DOMETT TRAILERS
7A9E20018K1023873
SODC: JH190812
LT400: CJC 712919

please note!

This brake calculation is made under consideration of
-the legal prescriptions mentioned above in the version valid
at the time of making the program (V6.14.04.20).
-the functional characteristics of our products
as well as the data of the brake out of the test
approvals of the axle manufacturers, and
-the other vehicle data included in the brake calculation.
Please check whether these data correspond to the actual vehicle data.
Our conditions of delivery apply (particularly section 9.0).
In WABCOBrake V6.14.04.20 do 03.11.2017

vehicle manufacturer: DOMETT TRAILERS
trailer model : 5AFT CURTAININSIDE
trailer type : 5-axle-full-trailer
remarks : air / hydraulic / VA suspension
WABCO TRAILER - EBS
TRISTOP 3+4: T.14/24 [TSE1416HTLD64 ACTUALLY FITTED -
SEE PAGE 7 FOR PERFORMANCE DATA]
265/70 R 19,5

axle 1 + 2 + 3 + 4 + 5 : HENDRICKSON, SBW 1937, AT0185,

		<u>unladen</u>	<u>laden</u>
total mass	P in kg	7100	35200
axle 1	P1 in kg	1600	8000
axle 2	P2 in kg	1600	8000
axle 3	P3 in kg	1300	6400
axle 4	P4 in kg	1300	6400
axle 5	P5 in kg	1300	6400
wheel base	E in mm	7800 - 8200	2098
centre of gravity height	h in mm	650	

<u>axle 1</u>	<u>axle 2</u>	<u>axle 3</u>	<u>axle 4</u>	<u>axle 5</u>
manually	manually	manually	manually	manually
1	1	1	1	1
2	2	2	2	2
BZ 122.1	BZ 122.1	BZ 119.6	BZ 119.6	BZ 122.1
Meritor	Meritor	Meritor	Meritor	Meritor
20.	20.	T.14/24	T.14/24	14.
69	69	69	69	69
23.49	23.49	23.49	23.49	23.49
421	421	421	421	421
421	421	421	421	421
6.0	6.0	6.0	6.0	6.0

calculation:

chamber pressure(rdyn min)pH at z=22,5%bar
 chamber pressure(rdyn max)pH at z=22,5%bar
 chamber press.(servo)pcha at pm6,5bar bar
 piston force ThA at pm6,5bar N
 brake force(rdyn min)T lad. at pm6,5bar N
 brake force(rdyn max)T lad. at pm6,5bar N
 brake force within 1 % rolling friction
 proportion %

2.2	2.2	2.1	2.1	2.1
2.2	2.2	2.1	2.1	2.1
5.7	5.7	4.8	4.8	4.8
6578	6578	4586	4586	4586
50826	50826	35307	35307	35307
50826	50826	35307	35307	35307
22.3	22.3	18.5	18.5	18.5

Trailer may only be operated in combination with trucks/tractors with ISO 7638 supply (5 or 7 polar).

brake diagram :

maximum pressure: 8.5 bar

axle 1:

valve 1: 971 002 ... 0 WABCO
EBS emergency valve

valve 2: 480 207 0.. 0 WABCO or 480 207 2.. 0
EBS relay valve

brake cylinder: Meritor 20HSCLD65

axle 2:

valve 1: 971 002 ... 0 WABCO
EBS emergency valve

valve 2: 480 207 0.. 0 WABCO or 480 207 2.. 0
EBS relay valve

brake cylinder: Meritor 20HSCLD65

axle 3:

valve 1: 971 002 ... 0 WABCO
EBS emergency valve

valve 2: 480 102 ... 0 WABCO
EBS trailer modulator

brake cylinder: Meritor 1424HTLD64

axle 4:

valve 1: 971 002 ... 0 WABCO

EBS emergency valve

valve 2: 480 102 ... 0 WABCO

EBS trailer modulator

brake cylinder: Meritor 1424HTLD64

axle 5:

valve 1: 971 002 ... 0 WABCO

EBS emergency valve


valve 2: 480 102 ... 0 WABCO

EBS trailer modulator






brake cylinder: Meritor 14HSCLD64

test type III (zIII = 0.30)	for rdyn min :	axle1	axle2	axle3	axle4	axle5	
at pm 3.6 bar =>	pcha in bar :	2.9	2.9	2.6	2.6	2.6	
test type III (zIII = 0.06)	for rdyn min :	axle1	axle2	axle3	axle4	axle5	
at pm 1.3 bar =>	pcha in bar :	0.8	0.8	0.8	0.8	0.8	

brake chamber pressure laden

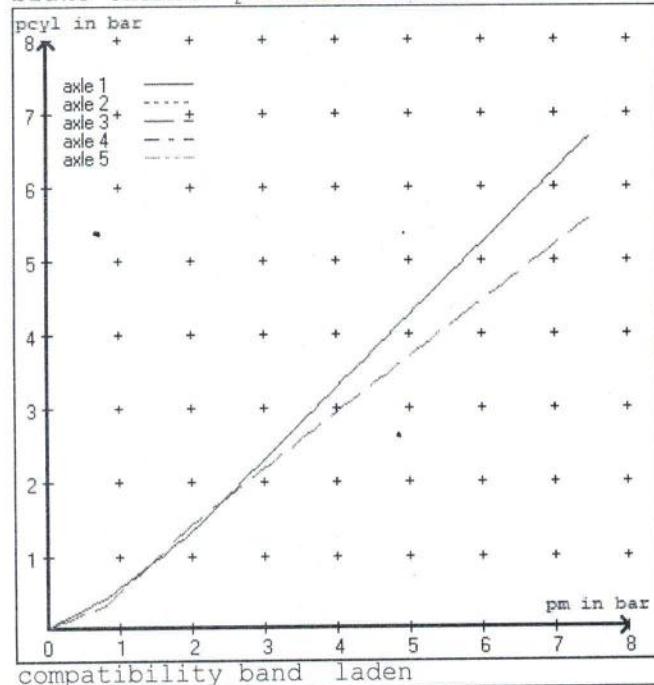

brake chamber pressure unladen

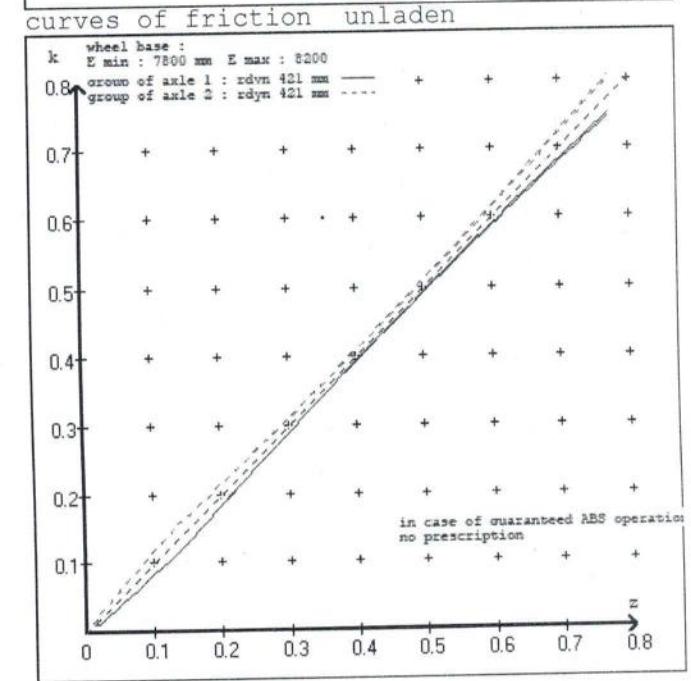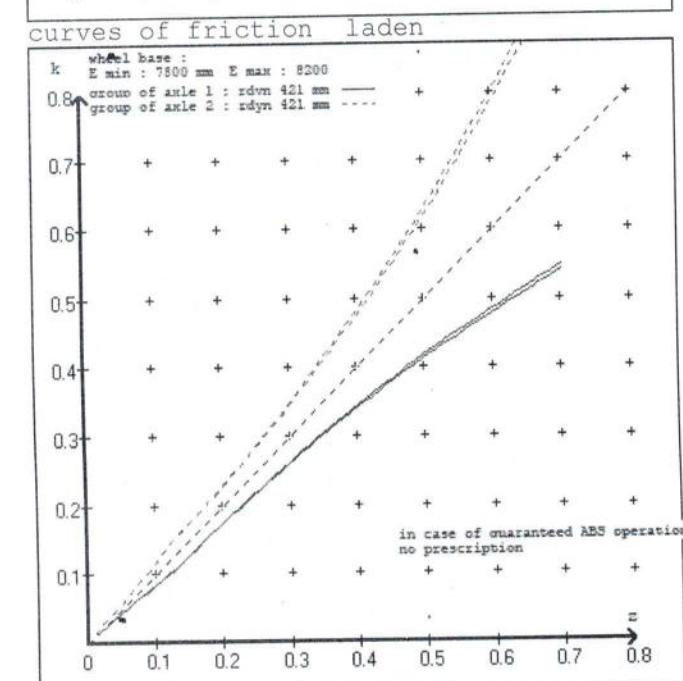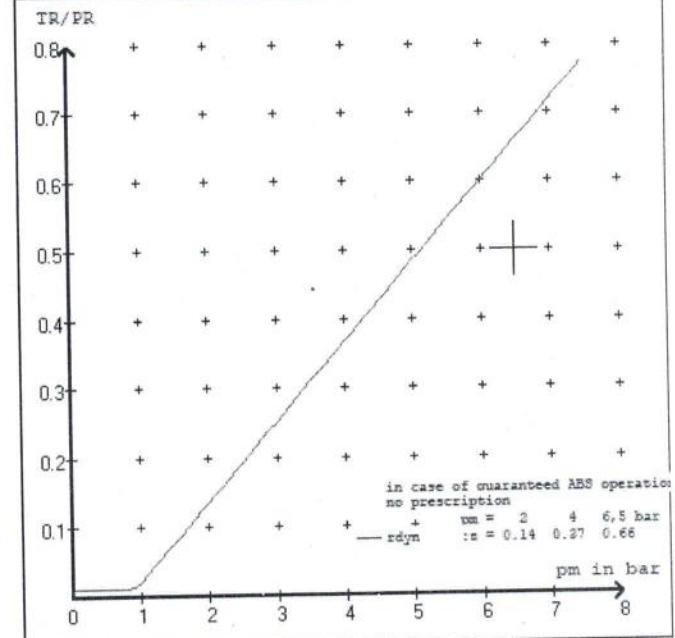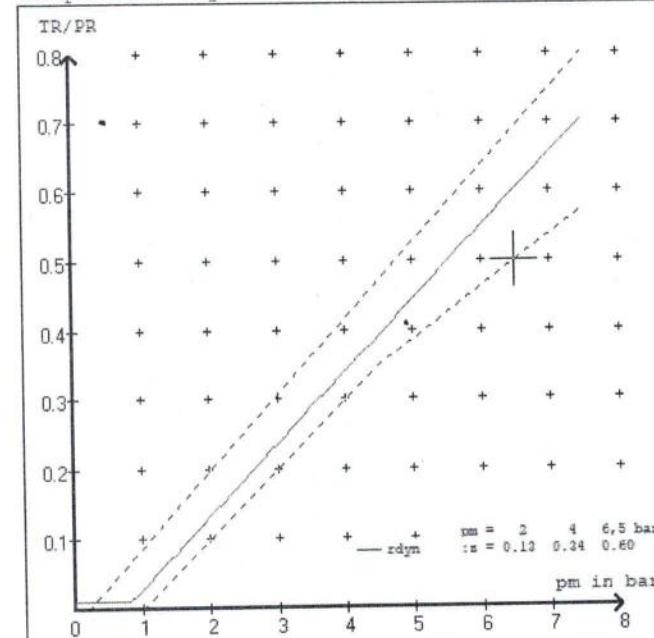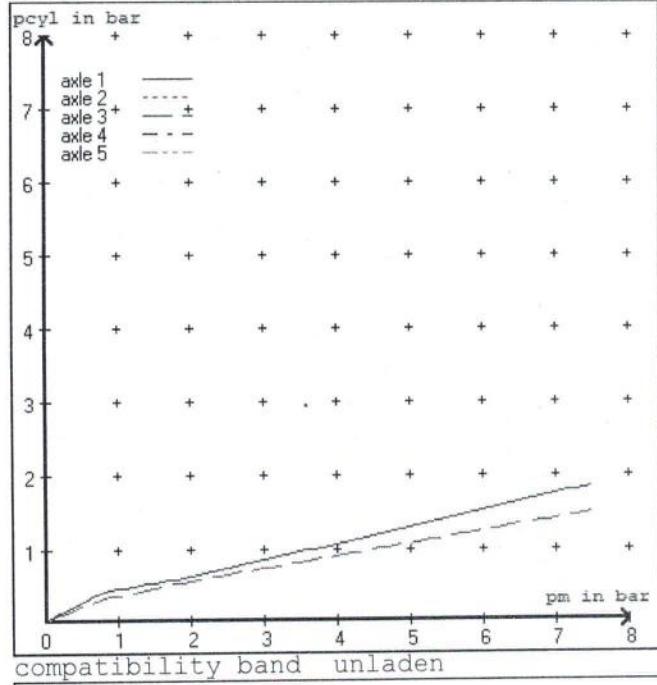

vehicle manufacturer: DOMETT TRAILERS
 trailer model : 5AFT CURTAININSIDE
 trailer type : 5-axle-full-trailer

brake chamber and lever length :

axle 1 :	2 x type/diameter	20.	(Meritor)	lever length 69 mm
axle 2 :	2 x type/diameter	20.	(Meritor)	lever length 69 mm
axle 3 :	2 x type/diameter	T.14/24	(Meritor)	lever length 69 mm
axle 4 :	2 x type/diameter	T.14/24	(Meritor)	lever length 69 mm
axle 5 :	2 x type/diameter	14.	(Meritor)	lever length 69 mm

brake diagram :

valve :

971 002 ... 0	WABCO EBS emergency valve	
480 207 0.. 0	WABCO EBS relay valve	or 480 207 2.. 0
480 102 ... 0	WABCO EBS trailer modulator	

EBS input data

=====

vehicle manufacturer: DOMETT TRAILERS
 trailer model : 5AFT CURTAININSIDE
 trailer type : 5-axle-full-trailer
 brake calculation no. : TP 51615A

tire circumference main axle	:	2650 for rdyn max
tire circumference auxiliary axle	:	2650 for rdyn max

assignment pm / deceleration z:	pm 0.8 bar z = 0.010
(laden condition)	2.0 bar z = 0.134
	6.5 bar z = 0.600

		control pressure pm	6,5	control pressure pm		0.8	2.0	6.5
axle	axle load unladen	bellow pr. unladen	brake pr. unladen	axle load laden	bellow pr. laden	brake pr. laden		
1	1600	to be entered by the vehicle manufact.	1.6	8000	to be entered by the vehicle manufact.	0.4	1.3	5.7
2	1600		1.6	8000		0.4	1.3	5.7
3	1300		1.3	6400		0.3	1.4	4.8
4	1300		1.3	6400		0.3	1.4	4.8
5	1300		1.3	6400		0.3	1.4	4.8

The unladen values indicated in the above table are values for the basic parameter set. Higher unladen axle loads and liftaxles are automatically recognized and do not require separate adjustment. The above unladen axle loads must not be fallen below.

axle 1	axle 2	axle 3	axle 4	axle 5
axle load pcyl				
1600	1.6	1600	1.6	1300
2100	1.9	2100	1.9	1800
2600	2.2	2600	2.2	2300
3100	2.6	3100	2.6	2800
3600	2.9	3600	2.9	3300
4100	3.2	4100	3.2	3800
4600	3.5	4600	3.5	4300
5100	3.8	5100	3.8	4800
8000	5.7	8000	5.7	6400

data sheet to ECE vehicle type-approval certificate concerning braking equipment: according to ECE R13 annex 11

axle 1 : reference axle: HENDRICKSONSBW 1937	brake lining: WABCO 230
test report : AT0185	date : 02.03.2017
axle 2 : reference axle: HENDRICKSONSBW 1937	brake lining: WABCO 230
test report : AT0185	date : 02.03.2017
axle 3 : reference axle: HENDRICKSONSBW 1937	brake lining: WABCO 230
test report : AT0185	date : 02.03.2017
axle 4 : reference axle: HENDRICKSONSBW 1937	brake lining: WABCO 230
test report : AT0185	date : 02.03.2017
axle 5 : reference axle: HENDRICKSONSBW 1937	brake lining: WABCO 230
test report : AT0185	date : 02.03.2017

calc. verif. of residual (hot) braking force type III

(item 4.2.1 of appendix 2 to annex 11)

axle 1 (rdyn 421 mm)	T = 24.0 % Fe
axle 2 (rdyn 421 mm)	T = 24.0 % Fe
axle 3 (rdyn 421 mm)	T = 18.5 % Fe
axle 4 (rdyn 421 mm)	T = 18.5 % Fe
axle 5 (rdyn 421 mm)	T = 18.5 % Fe

calculated actuator stroke in mm

(item 4.3.1.1 of appendix 2 to annex 11)

axle 1 (sp = 58 mm)	s = 48 mm
axle 2 (sp = 58 mm)	s = 48 mm
axle 3 (sp = 56 mm)	s = 48 mm
axle 4 (sp = 56 mm)	s = 48 mm
axle 5 (sp = 56 mm)	s = 48 mm

average thrust output in N at pm = 6,5 bar (however max. pcha = 7,0 bar)

axle1	ThA = 6578 N
axle2	ThA = 6578 N
axle3	ThA = 4586 N
axle4	ThA = 4586 N
axle5	ThA = 4586 N

calc. residual (hot) braking force in N

(item 4.3.1.4 of appendix 2 to annex 11)

axle 1 (rdyn 421 mm)	T = 40650 N
axle 2 (rdyn 421 mm)	T = 40650 N
axle 3 (rdyn 421 mm)	T = 28257 N
axle 4 (rdyn 421 mm)	T = 28257 N
axle 5 (rdyn 421 mm)	T = 28257 N

basic test type III
of subject (calculated)
trailer (E) residual
(hot)braking

braking rate of the vehicle
(item 4.3.2 to appendix 2 to annex 11) 0.60 0.48

required braking rate
(items 1.5.3 and 1.7.2 to annex 11) >= 0,4 and
>= 0,6*E (0.36)

axle 1 (rdyn 421 mm)	T = 40650 N
axle 2 (rdyn 421 mm)	T = 40650 N
axle 3 (rdyn 421 mm)	T = 28257 N
axle 4 (rdyn 421 mm)	T = 28257 N
axle 5 (rdyn 421 mm)	T = 28257 N

basic test type III
of subject (calculated)
trailer (E) residual
(hot)braking

braking rate of the vehicle
(item 4.3.2 to appendix 2 to annex 11) 0.60 0.48

required braking rate
(items 1.5.3 and 1.7.2 to annex 11) >= 0,4 and
>= 0,6*E (0.36)

spring parking brake

		axle 3	axle 4
no of TRISTOP-actuators per axle line KDZ		2	2
TRISTOP-actuator type		T.14/16	T.14/16
lever length	lBh in mm	69	69
stat. tyre radius	rstat max in mm	401	401
at a stroke of	s in mm	30	30
min. force of spring brake	TFZ in N	6160	6160
sp.brake chamber no Meritor.....		4	4
release pressure	pLs in bar	4.5	4.5

calculation:

ratio until road		4.0466	4.0466
iFb = lBh*Eta*C*rBt/(rBn*rstat)			
for rstat in mm		401	401
brake force of spring br. Tf in N		49151	49151
Tf = (TFZ*KDZ-2*Co/lBh)*iFb			
braking rate	zf laden	0.295	
zf = sum (Tf)/P + 0,01			

Test of the frictional connection required by the parking brake

minimum wheelbase/minimum supporting width min Ef necessary
to fulfil the regulations

$$\text{min Ef} = E * (1 - PR/P + zferf * h/E) / (1 - zferf / (fzul * nf/ng))$$

$$\text{min Ef} = 5922 \text{ mm} \quad \text{for } E = 7800 \text{ mm}$$

$$\text{=====}$$

$$\text{min Ef} = 6196 \text{ mm} \quad \text{for } E = 8200 \text{ mm}$$

$$\text{=====}$$

min Ef =	minimum distance between front axle(s) (trailer) or support (semitrailer)
and the rear axle(s) (resultant of the bogie)	
E =	wheel base
fzul = 0.80	maximum permissible frictional connection required
zferf = 0.18	maximum required braking ratio of the parking brake
h = 2098 mm	height of center of gravity - laden
PR = 19200 kg	maximum bogie mass - laden
P = 35200 kg	maximum total mass - laden
nf = 2	no. of axle(s) with TRISTOP spring brake actuators
ng = 3	no. of bogie axle(s)

axle manufacturer
type of brake
type of axle

axle 1 + 2 + 3 + 4 + 5
HENDRICKSON
SBW 1937
SBW 1937
AT0185

test report of characteristic value

adm. stat. axle load
tested axle load
max. adm. tyre radius
adm. cam. torque (6,5 bar)
lining area per brake
no. of brake cylinder
brakefactor (SB) Bf
brakefactor (PB) Bf
threshold torque (Co,dec)

Pstat	in kg	9000
Pe	in kg	10200
Rezul	in mm	999
Czul	in Nm	640
AB	in cm ²	292
-	-	2
-	-	23.49
-	-	23.49
Mo	in Nm	6

date
brake lining
cam torque
brake force
stroke
tested tyre radius
tested lever length
threshold torque (Co,e)

02.03.2017		
WABCO	230	
Ce	in Nm	638
TeIII	in daN	4649
seIII	in mm	48
Re	in mm	520
le	in mm	69
	in Nm	5


reference values

reference values for z = 50% for max rdyn: 421 mm

	pz [bar]	T [N]	T [N]
axle 1	1.0 5.7	5150 42285	
axle 2	1.0 5.7	5150 42285	
axle 3	1.0 4.8		4955 29374
axle 4	1.0 4.8		4955 29374
axle 5	1.0 4.8		4955 29374

VIN - no.:

	Axe(s) / Achse(n)				
brake cylinder type (service / parking) Bremszylinder Typ (Betrieb / Fest)	20. /	20. /	T.14/24	T.14/24	14. /
Maximum stroke smax = ...mm maximaler Hub smax = ...mm	65	65	64	64	64
Lever length = ...mm Hebellänge = ...mm	69.08	69.08	69.08	69.08	69.08

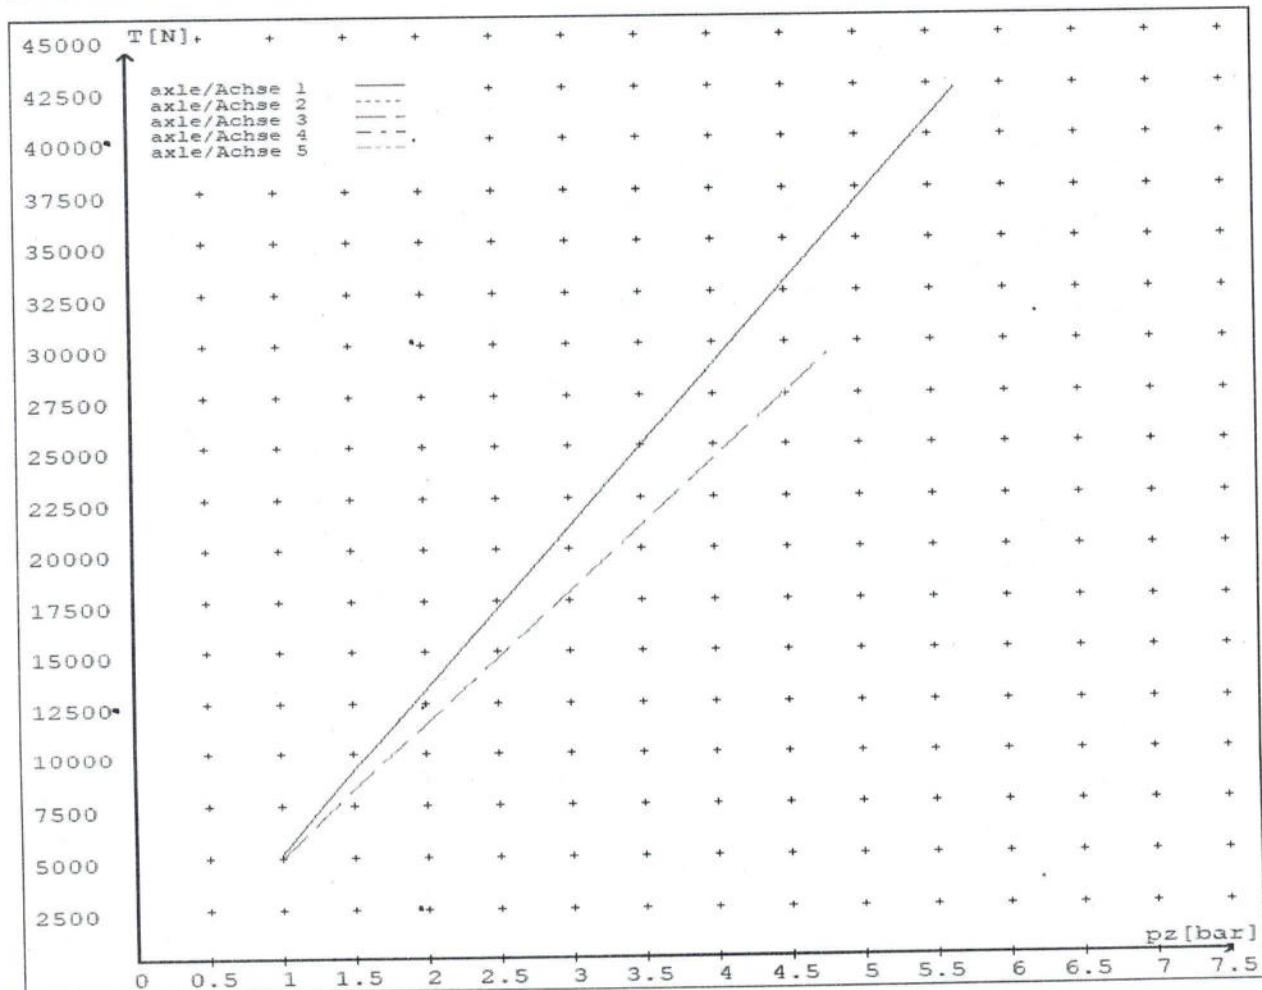

reference values for z = 0.5


Angabe der Referenzwerte für z = 0.5

for max rdyn: 421 mm

für max rdyn: 421 mm

brake calculation no: TP 51615A date 21.06.2019

Bremsberechnung Nr: TP 51615A vom 21.06.2019

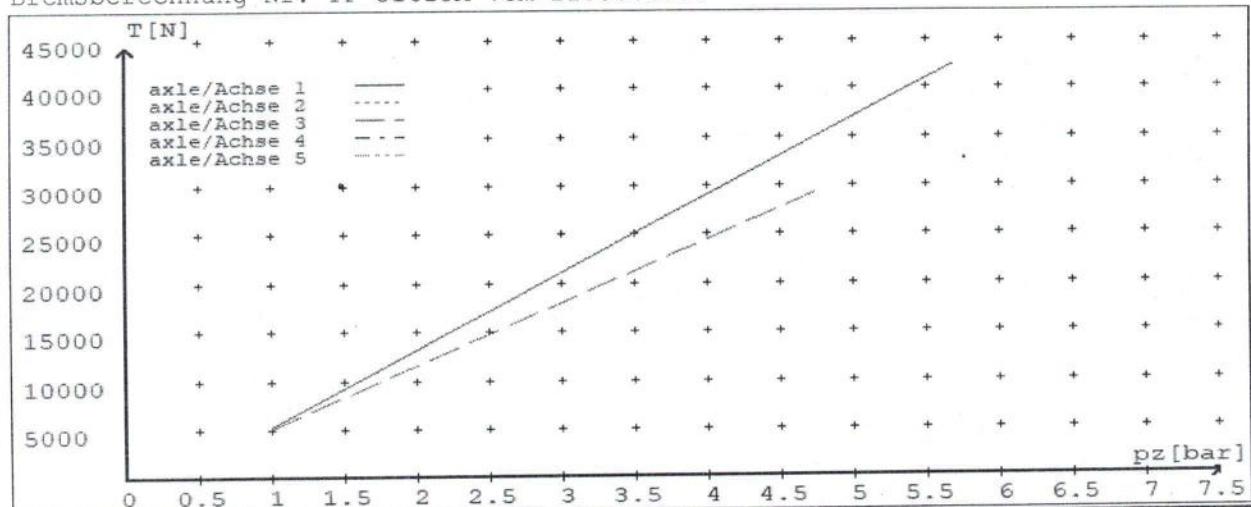

Axe(s) / Achse(n)

	20./	20./	T.14/24	T.14/24	14./
brake cylinder type (service / parking) Bremszylinder Typ (Betrieb / Fest)					
Maximum stroke smax = ...mm maximaler Hub smax = ...mm	65	65	64	64	64
Lever length =mm Hebellänge =mm	69.08	69.08	69.08	69.08	69.08

**NEW ZEALAND HEAVY VEHICLE BRAKE RULE 32015-5
WORKSHEET, PROCEDURE DOCUMENTATION SHEET
& CONFIRMATION OF COMPLIANCE**

CLIENT**MANUFACTURER:**

DOMETT TRAILERS

ADDRESS:

TAURIKURA DRIVE, TAURANGA 3173

FLEET:

TOWARDS TRANSPORT

VEHICLE DETAILS**VEHICLE TYPE:**

SAFT CURTAINSIDE

CERT #:

JH190812

YEAR:

2019

CALCULATION #:

TP51615

MAKE:

DOMETT

REGO:

N/A

MODEL:

E2001 PH

LT400 #:

712919

CHASSIS #:

1873

ORDER NUMBER:

6512

VIN #:

7A9E20018K1023873

GVM: TONNES

33

PRIME MOVER:

EBS / EUROPEAN

LOAD CONFIGURATION:

MIXED FREIGHT

GROUP RATINGS: TONNES

FRONT

REAR

16

19

WHEEL BASE: METRES

8.15

UNLADEN COG**MAX HEIGHT****HEIGHT DECK**

0.675

4.3

1.09

COG: METRES

2.008

TARE: TONNES

FRONT

REAR

TOTAL

3.2

3.9

7.1

TYRE SIZE:

265 70 R19.5

265 70 R19.5

ROLLING CIRCUMFERENCE: MM

2645

2645

AXLE SPACING: METRES

1.31

2.51

BRAKE & AXLE DETAILS

	MAKE	MODEL	TEST REPORT
AXLE:	HENDRICKSON	HND-PAN 19 DISC	ATRP0185
POLE WHEEL FRONT:	100	POLE WHEEL REAR:	100
LINING MATERIAL:	WABCO 230	BRAKE FACTOR:	23.49
SENSED AXLES:	2 + 4		
SERIAL NUMBERS:	1 2 3 4 5	N/A N/A N/A N/A N/A	

CHAMBER AND VALVING DETAILS

CHAMBERS:	AXLE 1 & 2	AXLE 3 & 4	AXLE 5
BRAND:	TSE_CHAMBERS	TSE_CHAMBERS	TSE_CHAMBERS
SIZE:	20HSCLD	1416HTLD	14HSCLD
STROKE: MILLIMETRES	65	64	64
TEST REPORT #:	BC 0041.0 Jul '07	BC0143.0	BZ 122.1 Sep '00
SPRINGBRAKE FORCE: kN	N/A	6.16	N/A
HOLDOFF PRESSURE: kPa	N/A	4.5	N/A
FOUNDATION BRAKE:	WABCO PAN19	WABCO PAN19	WABCO PAN19
LEVER LENGTH: MILLIMETRES	69	69	69
BRAKE VALVES:	MAKE:	PART NUMBER:	PM PRESS. kPa
ECU PART #:	WABCO	480 102 08. 0 (MV)	80 kPa
3RD MODULATOR #:	WABCO	480 207 202 0 (12V)	80 kPa
ANTI-COMPOUNDING:	YES	ELEX:	N/A
SPRING BRAKE RELAY:	WABCO_PREV	971 002 900 0	
YARD RELEASE VALVE:	WABCO-PREV	971 002 900 0	
INLINE RELAY FITTED:	N/A	N/A	

ECU DIRECTION:	<input checked="" type="checkbox"/> FRONT	<input type="checkbox"/> REAR	FRONT FRICTION: μ	0.48
SMARTBOARD/OPTILINK:	<input type="checkbox"/> SMARTBOARD	<input type="checkbox"/> OPTI-LINK	Page 2	

SUSPENSION

	FRONT	REAR
SUSPENSION TYPE:	PNEUMATIC	PNEUMATIC
MAKE:	HENDRICKSON_AIR	HENDRICKSON_AIR
MODEL:	HENDRICKSON_INTRAX	HENDRICKSON_INTRAX
BELLOW SIZE:	HND SHOCKLESS	HND SHOCKLESS
HEIGHT CONTROL VALVE:	464 008 011 0	464 008 011 0
OTHER VALVES:	N/A	N/A
RIDE HEIGHT MM:	255	255
HANGER HEIGHT MM:	200	200
PEDESTAL HEIGHT MM:	40	40
LIFTAXLE:		N/A
TIPPING DUMP SWITCH:		N/A
LIFTAXLE VALVE:		N/A

AIR TANKS

AIR TANKS STANDARD:	SAE J10A / EN286-2	
	FRONT	REAR
BRAKE TANK SIZE: L	46	71
AUXILLARY TANK SIZE: L	N/A	46
PRESSURE PROTECTION:	WABCO PEM: 461 513 002 0	

AIR LINES

TEST POINTS:			
CONTROL LINE:	X 1	TANK:	X 1
REAR CHAMBER:	X 2	FRONT CHAMBER:	X 1
DUOMATIC COLOUR CODED:	YES		

ELECTRONIC HEIGHT SENSOR CALIBRATION

	TIMER TICKS [F/R]	MILLIMETRE [F / R]
UPPER LEVEL:	N/A	N/A
NORMAL LEVEL:	N/A	N/A
LOWER LEVEL:	N/A	N/A

CHECKS AT COMMISSION OF VEHICLE

CHAMBER BUNGS REMOVED:

VALVE MOUNTING:

ECU BLANKING PLUGS CHECKED:

RESPONSE TIME:

MODULATOR 2.1

MODULATOR 2.2

RELAY VALVE

ms:

200

205

375

NOTES AND SPECIAL CONDITIONS

I UNDERSTAND AND DECLARE THAT I AM THE CERTIFIER IDENTIFIED BELOW AND HOLD A CURRENT VALID APPOINTMENT. I CERTIFY THAT AT THE TIME OF INSPECTION THE ABOVE MENTIONED VEHICLE COMPONENT DESIGN AND THIS CERTIFICATION COMPLIES IN ALL RESPECTS WITH THE LAND TRANSPORT RULE VEHICLE STANDARDS COMPLIANCE 2002 AND MY DEED OF APPOINTMENT. TO THE BEST OF MY KNOWLEDGE THE INFORMATION CONTAINED IN THIS CERTIFICATE IS TRUE AND CORRECT.

NEW ZEALAND HEAVY VEHICLE BRAKE RULE 32015/5, SCHEDULE 5.

DATE:

19/08/2019

SIGNED:



JOHN HIRST

JEH

CERTIFIER NAME & ID:

CHRIS CLARKE

CJC

SODC ENDORSED BY:

09-980-7300

PHONE (BUS):

NOTICE TO VEHICLE OPERATOR

THIS VEHICLE HAS A BRAKE SYSTEM WHICH HAS BEEN DESIGNED AND FITTED IN ACCORDANCE WITH THE LAND TRANSPORT HEAVY VEHICLE BRAKE RULE 32015/5.

IF THIS VEHICLE IS OPERATED IN CONJUNCTION WITH NON-CERTIFIED VEHICLES, THERE MAY BE OPERATIONAL FACTORS WHICH NEED TO BE TAKEN INTO CONSIDERATION.

PLEASE REFER TO THE CERTIFIER FOR FURTHER INFORMATION.

EXCERPT FROM LAND TRANSPORT RULE; HEAVY-VEHICLE BRAKES RULE 32015/5. SECTION 10,

10.1 RESPONSIBILITIES OF OPERATORS

A person who operates a vehicle must ensure that the vehicle complies with this rule.

10.2 RESPONSIBILITIES OF REPAIRERS

A person who repairs or adjusts a brake must ensure that the repair or adjustment:

- a) does not prevent the vehicle from complying with this rule;
- b) complies with Land Transport Rule: Vehicle Repair 1998.

10.3 RESPONSIBILITIES OF MODIFIERS

A person who modifies a vehicle so as to affect the braking performance of the vehicle must:

- a) ensure that the modification does not prevent the vehicle from complying with this Rule; and
- b) notify the operator that the vehicle must be inspected and, if necessary, certified by a person or organisation appointed to carry out specialist inspection and certification of heavy vehicle brakes.

IF YOU ARE UNSURE ABOUT YOUR RESPONSIBILITIES, PLEASE CONTACT THE VEHICLE MANUFACTURER, OR MYSELF.

COMPLAINTS. Complaints and Warranty issues which relate to Brake Certification will be acknowledged within 7 working days and a resolution proposed within 25 working days. Resolution of complaints and Warranty issues is subject to Transpecs Warranty policy. Customers have the right to appeal to the New Zealand Transport Authority if dissatisfied with a Compliance issue. (Refer NZTA Deed Of Appointment Para 47.4) NZTA Helpdesk 0800 699 000

(p.p.).....
(J.Hirst (JEH) HVEK)

NOTICE TO VEHICLE OPERATOR

This trailer is equipped with an Electronic Brake System.

To comply with the New Zealand Heavy Vehicle Brake Rule 32015/5, it must be used only in conjunction with a truck/tractor equipped with a 5 or 7 pin ABS/EBS power supply socket.

Failure to connect to such supply invalidates Brake Rule compliance.

The trailer ABS/EBS warning light on the towing vehicle dashboard must illuminate when the ignition is switched on and extinguish when the vehicle is in motion.

If the light does not illuminate when ignition is switched on, the system must be checked. If the light remains illuminated when the vehicle is in motion, Brake Rule compliance is compromised. Repairs must be made as soon as possible.

If you are unsure of your responsibilities and/or obligations, please contact either the vehicle manufacturer or myself.

(p.p.)
J E Hirst
(JEH-HVEK)
(09 980 7300)



NOTICE TO VEHICLE OPERATOR

WABCO Park Release Emergency Valve (PREV)

**This trailer is equipped with a WABCO PREV
Part # 971 002 900 0**

Application of the park brake via the cab control valve will actuate and apply all service brakes on the trailer. In the event of a leak in the service brake system the Spring Brakes will automatically override and hold the vehicle in compliance to Land Transport Rule: Heavy-vehicle Brakes Rule 32015/5.

When the vehicle is presented for COF the trailer park brake system is tested by pulling the red actuation knob on the PREV, situated mid way down the chassis rail. The cab control in the prime mover does not have to be applied for this test procedure.

If you are unsure of any aspect relating to this instruction please contact either the vehicle manufacturer or myself.

(p.p.)
J E Hirst
(JEH HVEK)
(09 980 7300)

