



Heavy Vehicle Specialist Certificate

Heavy Vehicle Specialist Inspector and Inspecting Organisation

Heavy Vehicle Specialist Inspector's Name (PRINT IN CAPS)

RONALD STUART PRATT

ID

TRSP

Vehicle Registration*

VIN / Chassis Number

7A9D15024A0023863

Component being certified:

Chassis Modification

Load Anchorage

Log Bolsters

Towing Connection

Brakes

SRT

Certification Category

HVEK

Description of Work

certifying to Brake Rule 32015

Code/Standard Certified to

NZHB Rule Schedule 5

Component Load Rating(s)

General Drawing Number(s)

NA

Supporting Documents

Brake Cert No RP100204

*Special Conditions

EBS control - Warning light must illuminate when ignition switched on and extinguish immediately OR when vehicle reaches 7kph

Certification Expiry Date (if applicable)

NA

or

Hubodometer Reading (whichever comes first)

Hubodometer Reading grid

Declaration

I the undersigned, declare that I am the Heavy Vehicle Specialist Inspector identified above and I hold a current valid appointment. I certify that the above mentioned vehicle component's design, manufacture and installation, and this certification complies in all respects with the Land Transport Rule Vehicle Standards Compliance 2002 and my Deed of Appointment. To the best of my knowledge the information contained in this Certificate is true and correct.

Designer's ID (if certified by a manufacturer)

Designer's ID field

Inspector's / Delegate's Signature

Signature of R. Stuart Pratt

*Delegate's Name (PRINT IN CAPS)

Delegate's Name field

Date

12-02-2010

Number

333641

COF Vehicle Inspector ID:

COF Vehicle Inspector ID field

COF Vehicle Inspector Signature:

COF Vehicle Inspector Signature field

Date

Date field

All fields excluding those marked with * must be completed before this certificate can be accepted.

NOTICE TO VEHICLE OPERATOR

This trailer is equipped with an Electronic Brake System.

To comply with the New Zealand Heavy Vehicle Brake RULE, it must be used only in conjunction with a truck/tractor equipped with a 5 or 7 pin ABS/EBS power supply socket.

Failure to connect to such supply invalidates Brake Rule compliance.

The trailer ABS/EBS warning light on the towing vehicle dashboard must illuminate when the ignition is switched on and extinguish when the vehicle is in motion.

If the light does not illuminate when ignition is switched on, the system must be checked. If the light remains illuminated when the vehicle is in motion, Brake Rule compliance is compromised. Repairs must be made as soon as possible.

NB:

If this vehicle is fitted with mechanical (spring) suspension, the load sense valving has been adjusted to suit exactly the performance of the original springs. In event of replacement being required, original equipment springs **must** be fitted to ensure correct ongoing operation. Fitment of non genuine springs can affect operation and therefore, compliance.

If you are unsure of your responsibilities and/or obligations, please contact either the vehicle manufacturer or myself.



R S Pratt
(TRSP HVEK 09 980 7300)

NOTICE TO VEHICLE OPERATOR

THIS VEHICLE HAS A BRAKE SYSTEM WHICH HAS BEEN DESIGNED AND FITTED IN ACCORDANCE WITH THE NEW ZEALAND HEAVY VEHICLE BRAKE RULE 32015: SCHEDULE 5.

IF THIS VEHICLE IS OPERATED IN CONJUNCTION WITH NON-CODED VEHICLES, THERE MAY BE OPERATIONAL FACTORS WHICH NEED TO BE TAKEN INTO CONSIDERATION.

PLEASE REFER TO THE CERTIFIER FOR FURTHER INFORMATION.

EXCERPT FROM NZ HEAVY VEHICLE BRAKE RULE 32015

10.1 Responsibilities of operators

A person who operates a vehicle must ensure that the vehicle complies with this Rule

10.2 Responsibilities of repairers

A person who repairs or adjusts a brake must ensure that the repair or adjustment:

- (a) does not prevent the vehicle from complying with the rule : and*
- (b) complies with Land Transport Rule: Vehicle Repair 1998.*

10.3 Responsibilities of modifiers

A person who modifies a vehicle so as to affect the braking performance of the vehicle must:

- (a) ensure that the modification does not prevent the vehicle from complying with this rule: and*
- (b) notify the operator that the vehicle must be inspected and, if necessary, certified by a person or organisation appointed to carry out specialist inspection and certification of heavy vehicle brakes.*


10.5 Responsibilities of manufactures and retailers

A person may manufacture, stock, or offer for sale a brake or its components. Intended for fitting to a vehicle to be used on New Zealand roads, only if that brake or component:

- (a) complies with this Rule: and*
- (b) does not prevent a repair to a vehicle, its structure, systems, components and equipment from complying with this Rule.*


IF YOU ARE UNSURE ABOUT YOUR RESPONSIBILITIES, PLEASE CONTACT THE VEHICLE MANUFACTURER, OR MYSELF.

COMPLAINTS. *Complaints and Warranty issues which relate to Brake Certification will be acknowledged within 7 working days and a resolution proposed within 25 working days. Resolution of complaints and Warranty issues is subject to Transpecs Warranty policy. Customers have the right to appeal to the Land Transport Safety Authority if dissatisfied with a Compliance issue. (refer LTNZ Deed Of Appointment Para 47.4) Land Transport NZ Helpdesk 0800 699 000*

.....

R S PRATT
(TRSP HVEK)

WABCO START-UP PROTOCOL


System	Trailer EBS	WABCO part number	480 102 020 0
Production date	2008-W11	Serial number	2680006881
Fingerprint EOL areas 1;2;3	342681, 195; 342681, 195; 342681, 195		

HERSTELLER MANUFACTURER CONSTRUCTEUR	Domett;		ELEKTR. SCHALTER 1 ELECTR. SWITCH 1 COMMUTATEUR ELECTR 1	---	No image available for that sensor arrange 	
TYP TYPE	QUAD Semi;		ISS GESCHW. ISS SPEED COMMUTATEUR VITESSE	0		
FAHRZEUG IDENTNR. CHASSIS NUMBER NUMERO DE CHASSIS	7A9D15024A0023863		ISS PIN INVERTIERT ISS_PIN INVERT COMMUTATEUR INVERSE	---		
BREMSBERECHNUNGS-NR. BRAKE CALCULATION NO. CALCUL DE FREINAGE NO.	TP72;		10 ± PULSE 10 ± PULSE IMPULSION 10s	---		
ABS-System ABS-System ABS-System	2S/2M		ELEKTR. SCHALTER 2 ELECTR. SWITCH 2 COMMUTATEUR ELECTR.2	---		
POLRADZÄHNEZAHL c,d POLE WHEEL TEETH c,d DENTS ROUE DENTÉE c,d	100	POS. LIFTACHSEN POS. LIFTAXLE PRÉP. ESS. RELEV	WARNLAMPE WARNING LAMP VOYANT DE SÉCURITÉ	2s	BREMSENPRÜFNUMMER BRAKE TEST NUMBER NUMERO D'ESSAI DE FREIN	
POLRADZÄHNEZAHL e,f POLE WHEEL TEETH e,f DENTS ROUE DENTÉE e,f	100	IO 1 IO 1 IO 1	LIFTACHSE HEBEN V LIFTING AXLE SPEED V VITESSE ESS. RELEVABLE	0	GGVS/ADR	
EXT. BREMSDRUCKSENS. EXT. BRAKE PRESS. SENS. EXT. CAPT. PRES. DE FREIN	---	RBS RBS RBS	RSS-S	LIFTACHSE SENKEN % LOWER LIFTING AXLE % BAISSER ESSIEU RELEV. %	0	TPN 1203/04
						ANFAHRHILFE GESCHW. TRACTION HELP V VITESSE AIDE DEMARRAGE
						ANFAHRHILFE DRUCK TRACTION HELP PRESS. PRES. AIDE DEMARRAGE

	STEUERDRUCK PM (BAR) CONTROL PRESSURE (BAR) PRESSION DE SERVICE PM (BAR)			STEUERDRUCK PM (BAR) CONTROL PRESSURE (BAR) PRESSION DE SERVICE PM (BAR)			0.8	2.0	6.5
ACHSE AXLE ESSIEU	ACHBLAST UNLADEN AXLE LOAD UNLADEN CHARGE ESSIEU A VIDE (KG)	BALGD RUCK LEER SUSP. PRESS. UNLADEN PRESS. SUSP. A VIDE (BAR)	BREMSDRUCK LEER BRAKE PRESS. UNLADEN PRESS. DE FREIN A VIDE (BAR)	ACHBLAST BELADEN AXLE LOAD LADEN CHARGE ESSIEU EN CHARGE (KG)	BALGD RUCK BELADEN SUSP. PRESS. LADEN PRESS. SUSP. EN CHARGE (BAR)	BREMSDRUCK BELADEN BRAKE PRESS. LADEN PRESS. DE FREIN. A CHARGE (BAR)			
1	1200	0.4	2.1	7000	4.3	0.5	1.6	6.1	
2	1200	0.4	2.1	7000	4.3	0.5	1.6	6.1	
3	1200	0.4	2.1	7000	4.3	0.5	1.6	6.1	
4	1200	0.4	2.1	7000	4.3	0.5	1.6	6.1	
5	---	---	---	---	---	---	---	---	

Test report number							
Actuator type		Axle	1	2	3	4	5
Service brake							
Spring brake							
Max. actuator stroke (mm)							
Lever length (mm)							

Diagnostic memory	OK	Warning lamp control	OK
Parameter setting	carried out	Stop light power supply	Not tested
EBS pressure test	OK	Lifting axle test	Not tested
Redundancy test	OK		
ABS sensor assignment	OK		

Manufacturer	Domett;	Vehicle ident. no	7A9D15024A0023863
Vehicle type	QUAD Semi;	Odometer reading	0.0 km
next Service	30000 km	Trip reading	0 km
Tested by	Ron Pratt	Signature	
Date	2010-02-12 1:42:38 PM		



QUALITY ON THE MOVE

P.O.Box 98-971

South Auckland Mail Centre

Ronald Stuart Pratt (TRSP)

DATE 12-Feb-10 TYPE APPROVED NO

CERTIFICATE No RP100204 RORQEBS

VIN No 7A9D15024A0023863

BRAKE CHAMBERS FRONT 16/24 Meritor 64

BRAKE CHAMBERS REAR 16Meritor 64 LOAD SENSED Yes EBS Control

SLACK LENGTH FRONT Disc TYRE SIZE FRONT 355/50R22.5

SLACK LENGTH REAR Disc TYRE SIZE REAR 355/50R22.5

THIS VEHICLE COMPLIES WITH N.Z.H.V.B.R. LINING MATERIALFRONT ROR 8616 AF

32015 SCHEDULE 5 LINING MATERIAL REAR ROR 8616 AF

full, semi-, centre-axle) with air brake system acc. to EC, last amended by 98/12/EC and 2006/96/EC or UN/ECE-R.13.10

please note!

This brake calculation is made under consideration of
 -the legal prescriptions mentioned above in the version valid at the time of making the program (V5.09.06.06).
 -the functional characteristics of our products, but not of those of other manufacturers, and
 -the other vehicle data included in the brake calculation.
 Please check whether these data correspond to the actual vehicle data.
 Our conditions of delivery apply (particularly section 9.0).
 WABCO Brake V5.09.06.06 db 06.06.2009

distribution: Domett 3360 863
 00072RP

manufacturer: Domett
 model : QUAD Semi
 type : 4-axle-semi-trailer
 : air / hydraulic / VA suspension
 WABCO T-EBS: D or D PLUS (PREV)
 TRISTOP 1+2: T.14/24
 355/50 R 22,5

2 + 3 + 4 : ROR, Elsa 195 LE, 36102202, Re 518

		unladen		laden	
PS	P in kg	6900	- 6900	42000	- 42000
P1	P1 in kg	2100	- 2100	14000	- 14000
P2	P2 in kg		1200		7000
P3	P3 in kg		1200		7000
P4	P4 in kg		1200		7000
PR	PR in kg		1200		7000
E	E in mm		4800		28000
h	h in mm	8500	- 8500		
			1320		2200
Kv min		1.8177		Kc min	1.0676
Kv max		1.8177		Kc max	1.0676

		axle 1	axle 2	axle 3	axle 4
combined axles		1	1	1	1
brake chambers per axle line	KDZ	2	2	2	2
output corresponds to		BZ 119.6	BZ 119.6	BZ 122.1	BZ 122.1
number manufacturer		Meritor	Meritor	Meritor	Meritor
size		T.16/24	T.16/24	16.	16.
length	lBh in mm	74	74	74	74
factor	[-]	20.30	20.30	20.30	20.30
spring radius	rdyn min in mm	449	449	449	449
spring radius	rdyn max in mm	449	449	449	449
torque	Co Nm	10.0	10.0	10.0	10.0

on:		axle 1	axle 2	axle 3	axle 4
pressure (rdyn min) pH at z=22,5%bar		2.5	2.5	2.5	2.5
pressure (rdyn max) pH at z=22,5%bar		2.5	2.5	2.5	2.5
pressure (servo) pcha at pm6,5bar	bar	6.1	6.1	6.1	6.1
force	ThA at pm6,5bar N	6161	6161	6161	6161
force (rdyn min) T lad. at pm6,5bar	N	41008	41008	41008	41008
force (rdyn max) T lad. at pm6,5bar	N	41008	41008	41008	41008
force within 1 % rolling friction	%	25.0	25.0	25.0	25.0

rate z laden 0.597 for rdyn min
 TR)/PRmax 0.597 for rdyn max

may only be operated in combination with trucks/tractors with supply (5 or 7 polar).

brake diagram :

maximum pressure: 8.5 bar

axle 1:

valve 1: 480 102 0.. 0 WABCO
 EBS trailer modulator

axle 2:

valve 1: 480 102 0.. 0 WABCO
 EBS trailer modulator

axle 3:

valve 1: 480 207 0.. 0 WABCO
 EBS relay valve


axle 4:

valve 1: 480 207 0.. 0
EBS relay valve


WABCO

test type III (zIII = 0.30)	for rdyn min :	axle1	axle2	axle3	axle4
at pm 3.7 bar =>	pcha in bar :	3.3	3.3	3.3	3.3
test type III (zIII = 0.06)	for rdyn min :	axle1	axle2	axle3	axle4
at pm 1.3 bar =>	pcha in bar :	1.0	1.0	1.0	1.0


brake chamber pressure laden

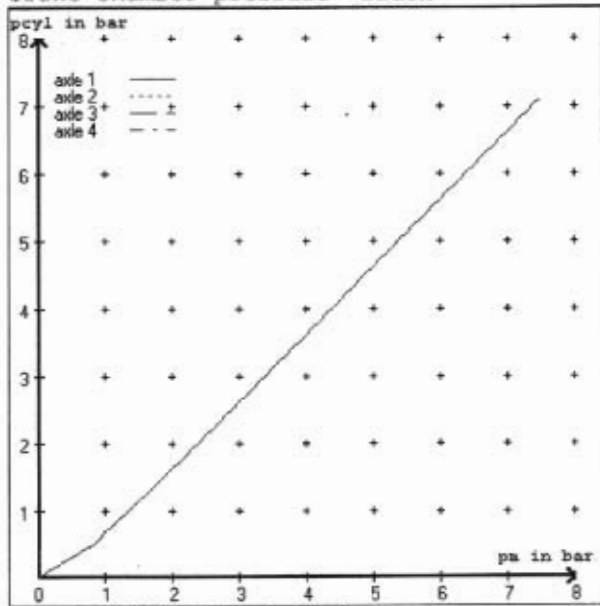


brake chamber pressure unladen

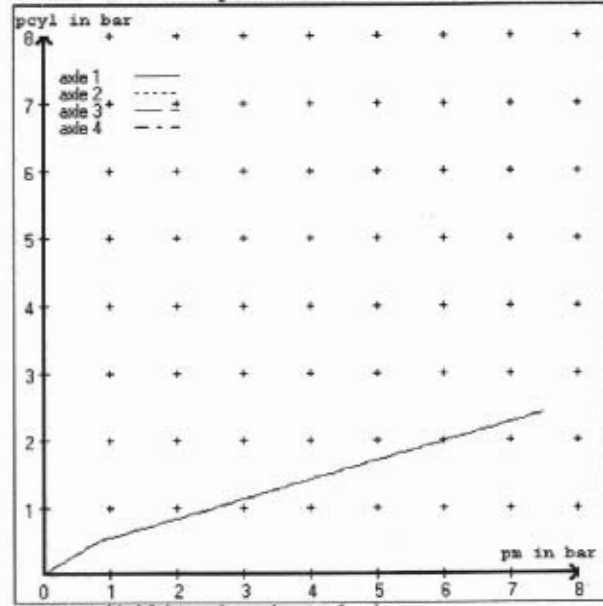

compatibility band laden

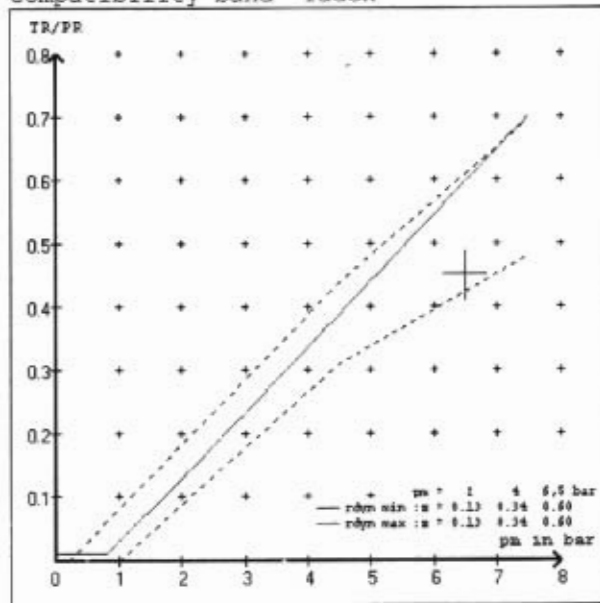

compatibility band unladen

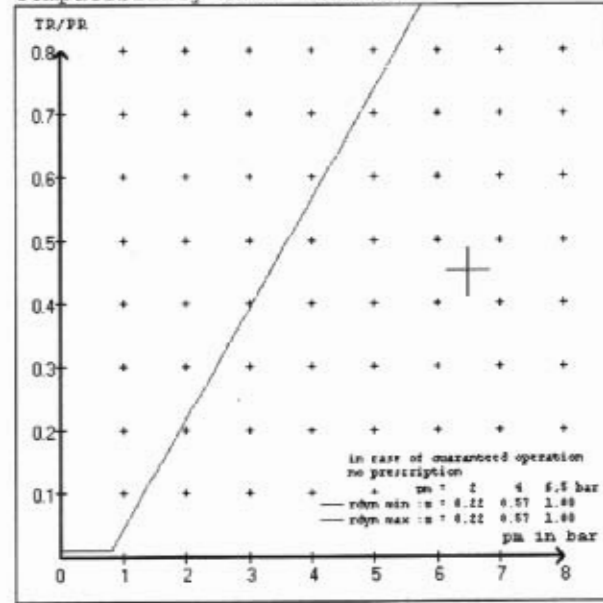

vehicle manufacturer: Domett
 trailer model : QUAD Semi
 trailer type : 4-axle-semi-trailer

brake chamber and lever length :

axle 1 : 2 x type/diameter T.16/24 (Meritor) lever length 74 mm
 axle 2 : 2 x type/diameter T.16/24 (Meritor) lever length 74 mm
 axle 3 : 2 x type/diameter 16. (Meritor) lever length 74 mm
 axle 4 : 2 x type/diameter 16. (Meritor) lever length 74 mm

brake diagram :

valve :
 480 102 0.. 0 WABCO EBS trailer modulator
 480 207 0.. 0 WABCO EBS relay valve

EBS input data

vehicle manufacturer: Domett
 trailer model : QUAD Semi
 trailer type : 4-axle-semi-trailer
 brake calculation no. : TP 72S

tire circumference main axle : 2825 for rdyn max
 tire circumference auxiliary axle : 2825 for rdyn max

assignment pm / deceleration z: pm 0.8 bar z = 0.000
 (laden condition) 2.0 bar z = 0.126
 6.5 bar z = 0.600

control pressure pm			6,5	control pressure pm			0.8	2.0	6.5
axle	axle load unladen	bellow pr. unladen	brake pr. unladen	axle load laden	bellow pr. laden	brake pr. laden			
1	1200	to be	2.1	7000	to be	0.5	1.6	6.1	
2	1200	entered by the vehicle manufact.	2.1	7000	entered by the vehicle manufact.	0.5	1.6	6.1	
3	1200		2.1	7000		0.5	1.6	6.1	
4	1200		2.1	7000		0.5	1.6	6.1	
5	0		0,0	0		0,0	0,0	0,0	0,0

The unladen values indicated in the above table are values for the basic parameter set. Higher unladen axle loads and liftaxles are automatically recognized and do not require separate adjustment. The above unladen axle loads must not be fallen below.

axle 1	axle 2	axle 3	axle 4
axle load pcy1	axle load pcy1	axle load pcy1	axle load pcy1
1200	1200	1200	1200
1700	1700	1700	1700
2200	2200	2200	2200
2700	2700	2700	2700
3200	3200	3200	3200
3700	3700	3700	3700
4200	4200	4200	4200
4700	4700	4700	4700
7000	7000	7000	7000

data sheet to EC/ECE vehicle type-approval certificate concerning braking equipment: according to 98/12/EC annex IX 2.7.4 / ECE R13 annex 11

axle 1	: reference axle: ROR	.../... .../K brake lining: ROR 8616 AF
	test report :	36102202 date : 07.06.2002
axle 2	: reference axle: ROR	.../... .../K brake lining: ROR 8616 AF
	test report :	36102202 date : 07.06.2002
axle 3	: reference axle: ROR	.../... .../K brake lining: ROR 8616 AF
	test report :	36102202 date : 07.06.2002
axle 4	: reference axle: ROR	.../... .../K brake lining: ROR 8616 AF
	test report :	36102202 date : 07.06.2002

calc. verif. of residual (hot) braking force type III
(item 4.2 of appendix I to annex VII)

axle 1	(rdyn 449 mm)	T = 19.1 % Pe
axle 2	(rdyn 449 mm)	T = 19.1 % Pe
axle 3	(rdyn 449 mm)	T = 19.1 % Pe
axle 4	(rdyn 449 mm)	T = 19.1 % Pe

calculated actuator stroke in mm
(item 4.3.1.1 of appendix I to annex VII)

axle 1	(sp = 57 mm)	s = 50 mm
axle 2	(sp = 57 mm)	s = 50 mm
axle 3	(sp = 57 mm)	s = 50 mm
axle 4	(sp = 57 mm)	s = 50 mm

average thrust output in N at pm = 6,5 bar (however max. pcha = 7,0 bar)

axle1	ThA = 6161 N
axle2	ThA = 6161 N
axle3	ThA = 6161 N
axle4	ThA = 6161 N

calc. residual (hot) braking force in N
(item 4.3.1.4 of appendix I to annex VII)

axle 1	(rdyn 449 mm)	T = 34880 N
axle 2	(rdyn 449 mm)	T = 34880 N
axle 3	(rdyn 449 mm)	T = 34880 N
axle 4	(rdyn 449 mm)	T = 34880 N

	basic test	type III
	of subject	(calculated)
braking rate of the vehicle	trailer (z)	residual
(item 4.3.2 to appendix I to annex VII)	0.60	(hot)braking
		0.51

required braking rate $\geq 0,4$ and $\geq 0,6 * z$ (0.36)
(items 1.3.3 and 1.6.2 to annex II)

calc. residual (hot) braking force in N
(item 4.3.1.4 of appendix I to annex VII)

axle 1	(rdyn 449 mm)	T = 34880 N
axle 2	(rdyn 449 mm)	T = 34880 N
axle 3	(rdyn 449 mm)	T = 34880 N
axle 4	(rdyn 449 mm)	T = 34880 N

	basic test	type III
	of subject	(calculated)
braking rate of the vehicle	trailer (z)	residual
(item 4.3.2 to appendix I to annex VII)	0.60	(hot)braking
		0.51

required braking rate $\geq 0,4$ and $\geq 0,6 * z$ (0.36)
(items 1.3.3 and 1.6.2 to annex II)

spring parking brake

	axle 1	axle 2
no of TRISTOP-actuators per axle line KDZ	2	2
TRISTOP-actuator type	T.16/24	T.16/24
lever length 1Bh in mm	74	74
stat. tyre radius rstat max in mm	432	432
at a stroke of s in mm	30	30
min. force of spring brake TFZ in N	7605	7605
sp.brake chamber no Meritor.....	4	4
release pressure pLs in bar	4.8	4.8

calculation:

ratio until road	3.4773	3.4773
$iFb = 1Bh * \eta * C * rBt / (rBn * rstat)$ for rstat in mm	432	432
brake force of spring br. Tf in N	51950	51950
$Tf = (TFZ * KDZ - 2 * Co / 1Bh) * iFb$		
braking rate zf laden	0.262	
$zf = \sum (Tf) / P + 0,01$		

Test of the frictional connection required by the parking brake

minimum wheelbase/minimum supporting width min Ef necessary to fulfil the regulations

$$\min Ef = E * (1 - PR/P + zferf * h/E) / (1 - zferf / (fzul * nf/ng))$$

$$\min Ef = 5872 \text{ mm} \quad \text{for } E = 8500 \text{ mm}$$

$$\min Ef = 5872 \text{ mm} \quad \text{for } E = 8500 \text{ mm}$$

min Ef = minimum distance between front axle(s) (trailer) or support (semitrailer) and the rear axle(s) (resultant of the bogie)

E = wheel base

fzul = 0.80 maximum permissible frictional connection required

zferf = 0.18 maximum required braking ratio of the parking brake

h = 2200 mm height of center of gravity - laden

PR = 28000 kg maximum bogie mass - laden

P = 42000 kg maximum total mass - laden

nf = 2 no. of axle(s) with TRISTOP spring brake actuators


ng = 4 no. of bogie axle(s)

reference values

reference values for z = 45%

	pz [bar]	T [N]	T [N]
axle 1	1.0	3362	
	6.1	30911	
axle 2	1.0	3362	
	6.1	30911	
axle 3	1.0		3362
	6.1		30911
axle 4	1.0		3362
	6.1		30911

VIN - no.:

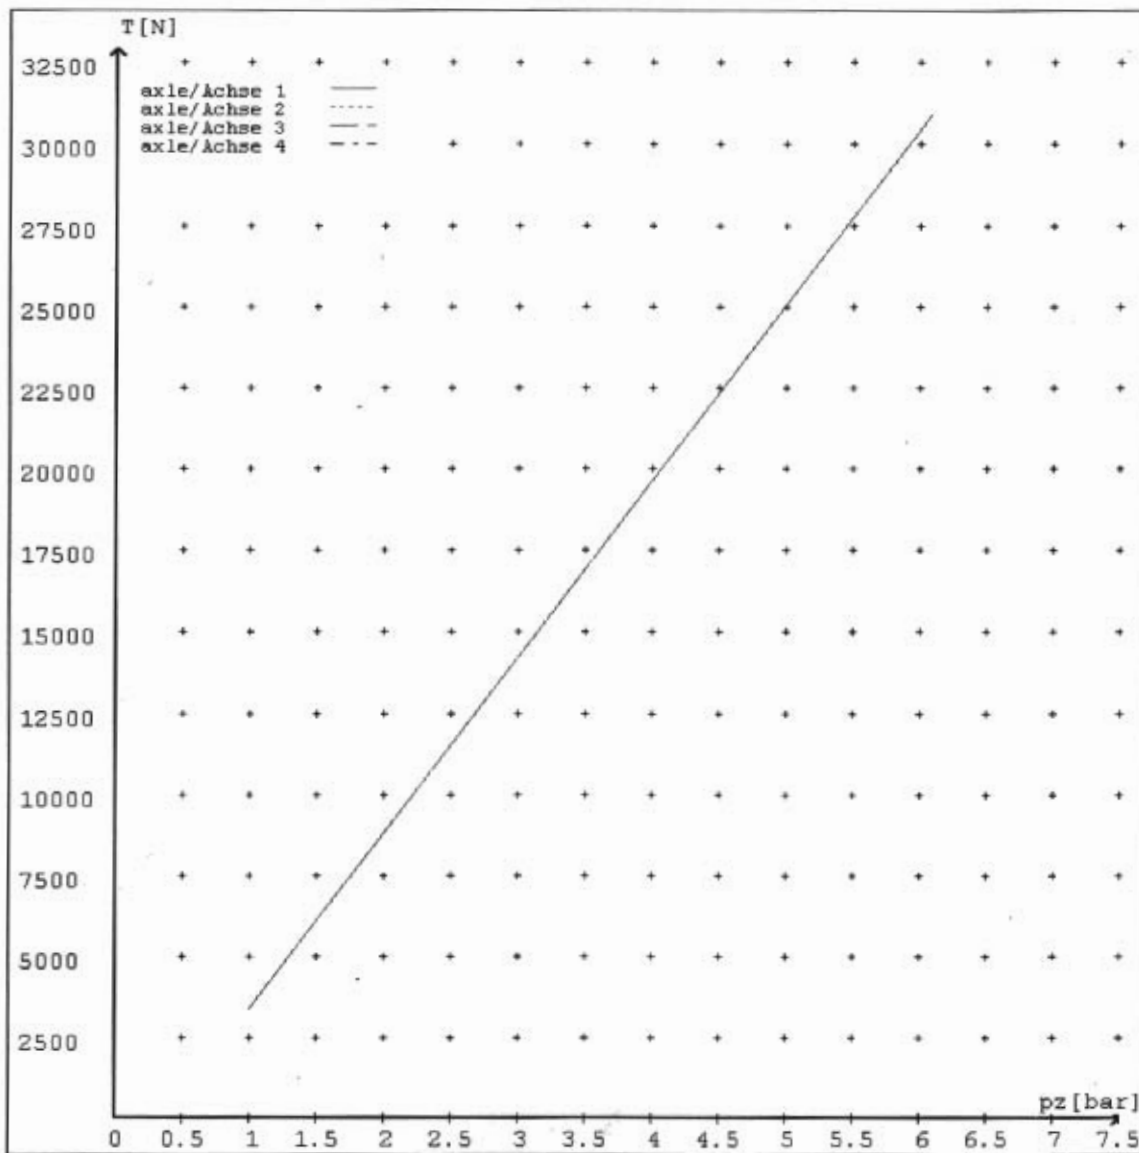


reference values for $z = 0.45$

Angabe der Referenzwerte für $z = 0.45$

brake calculation no: TP 72S date 27.01.2010

Bremsberechnung Nr: TP 72S vom 27.01.2010

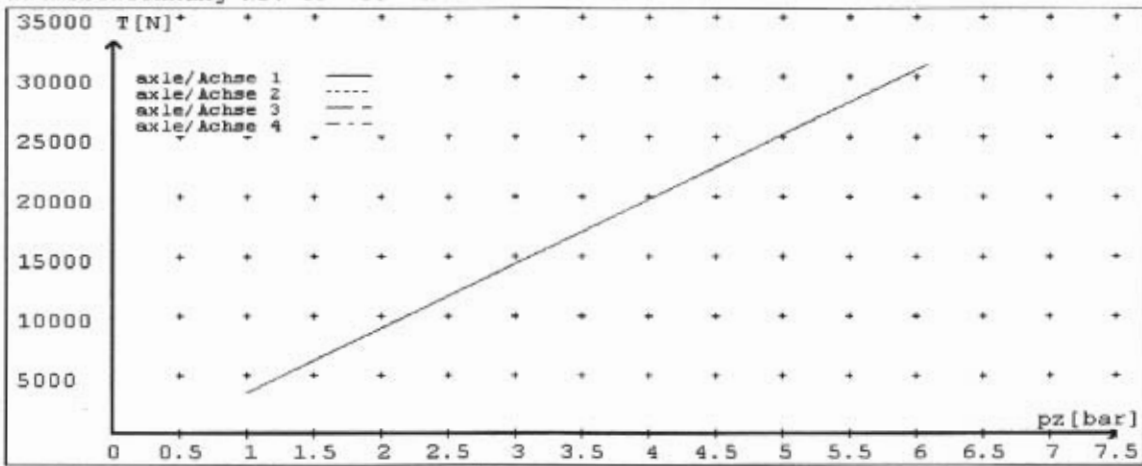

	Axle(s) / Achse(n)				
brake cylinder type (service / parking) Bremszylinder Typ (Betrieb / Fest)	T.16/24	T.16/24	16./	16./	/
Maximum stroke $s_{max} = \dots mm$ maximaler Hub $s_{max} = \dots mm$	64	64	64	64	
Lever length = $\dots mm$ Hebellänge = $\dots mm$	74	74	74	74	